

IMPORTANT - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

⚠ DISCONNECT THE MAIN LINE BEFORE WIRING SECONDARY CONNECTORS.

FIXTURE INSTALLATION - TO REMOTE DRIVER (REM)

A- **TRIM MODELS FOR REMODEL INSTALLATION:** MAKE THE CUT-OUT OPENING (SEE DIMENSIONS BELOW).

B- MAKE ALL NECESSARY CONNECTIONS (**FOLLOWING POLARITY MARKING AND WIRING DIAGRAM**) USING THE QUICK CONNECTORS (**INCLUDED**).


C- HOLD THE (2) CLIPS UPWARDS AND INSERT FIXTURE INTO CUT-OUT.

TRIMLESS MODEL: ONCE INSERTED INTO THE TRIMLESS FRAME, THE CLIPS SPRING BACK DOWN AND THE TRIMLESS FRAME HOOKS WILL HOLD THE LIGHTING FIXTURE IN PLACE.


A + B

WIRING DIAGRAM

Multiple luminaires must be connected in series (home run or fixture chain)

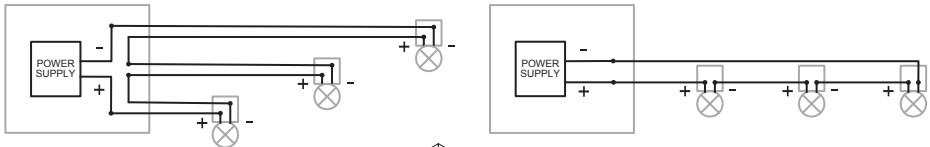


LED +	RED
LED -	BLACK

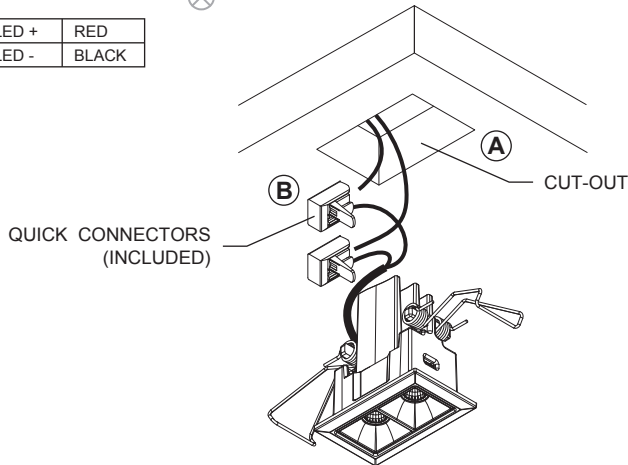

Model	Cut-out dimensions	Ceiling thickness	Clearance
LBXS01	1" x 1" (24 x 24mm)	1/8" to 1 1/8" (3mm - 29mm)	2" (50mm)
LBXS02	1" x 1 1/8" (24 x 42mm)		
LBXS03	1" x 2 3/8" (24 x 60mm)		
LBXS04	1 1/8" x 1 1/8" (42 x 42mm)		
LBXS05	1" x 3 3/4" (24 x 95mm)		
LBXS09	2 3/8" x 2 3/8" (60 x 60mm)		
LBXS10	1" x 7 7/8" (24 x 186mm)		
LBXS15	1" x 10 7/8" (24 x 276mm)		

C

TRIM INSTALLATION

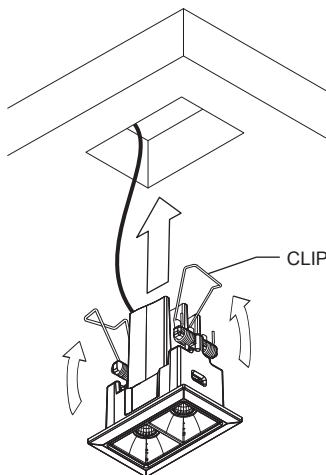

TRIMLESS INSTALLATION

