

## Agorà

Design Jean-Michel  
Wilmotte

iGuzzini

Last information update: April 2025

### Product configuration: 2755

2755: Spotlight with bracket - RGBW - Remote power supply and Integrated driver - Super Spot optic



### Product code

2755: Spotlight with bracket - RGBW - Remote power supply and Integrated driver - Super Spot optic

### Technical description

Spotlight designed to use RGBW (Red Green Blue White 3000K) LED lamps, a Super Spot optic and a DMX512-RDM control. Consists of a die-cast aluminium optical assembly, bracket and box for the power supply with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The optical system is Opti Beam Lens. The electronic power supply is remote whereas the DMX driver is integrated in the product and compatible with remote management systems. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

### Installation

Floor, ceiling or wall-mounted installation.

### Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

### Weight (Kg)

22.28

### Wiring


Double PG.

Complies with EN60598-1 and pertinent regulations



IK08


IP66




### Technical data

Im system:	10920	Colour temperature [K]:	RGBW - 3000K
W system:	155.4	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	15600	Life Time LED 2:	92,000h - L80 - B10 (Ta 40°C)
W source:	144	Lamp code:	LED
Luminous efficiency (lm/W, real value):	70.3	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	70	Intervalllo temperatura ambiente:	from -30°C to 50°C.
Beam angle [°]:	8°	LED current [mA]:	195
CRI (typical):	82	Control:	DMX-RDM

# Polar

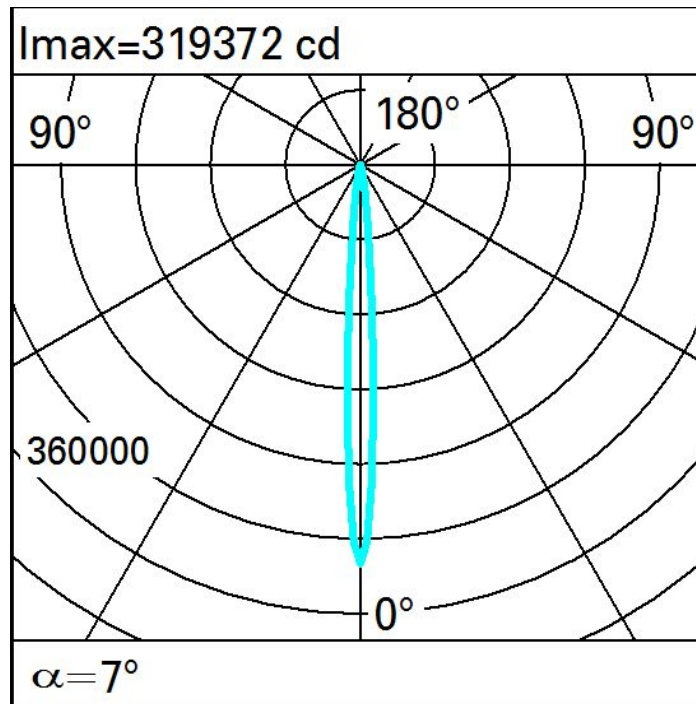

# Isolux

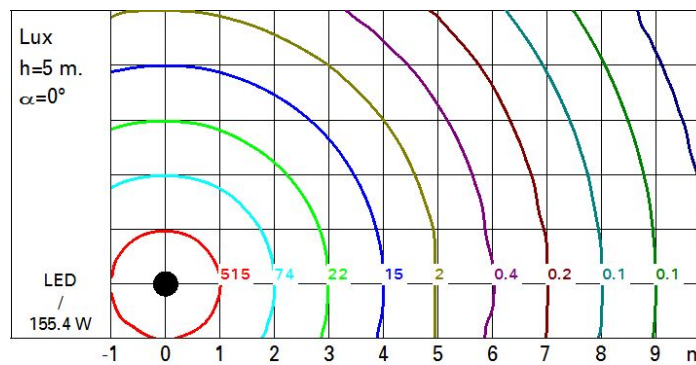

# Illuminances

