


Last information update: March 2025

Product configuration: 325A.01

325A.01: SIPARIO Ø86 spotlight - DALI - WideFlood - OBLens - - 18W 1603.7lm - 3500K - CRI 90 - White

**Product code**

325A.01: SIPARIO Ø86 spotlight - DALI - WideFlood - OBLens - - 18W 1603.7lm - 3500K - CRI 90 - White

Technical description

Ø86 adjustable spotlight with adapter for installation on a base or electrified track. LED lamp with C.O.B. (Chip on board) technology, -CRI90- high colour rendering and 3500K tone.

Die-cast aluminium body with thermoplastic rear cap and front ring (Mass-Balance). The product can be rotated by 360° around the vertical axis with a mechanical lock and tilted by 90° relative to the horizontal plane. Passive heat dissipation.

OptiBeam Lens optical system with WideFlood optic.

Dimmable electronic DALI-2 power supply integrated in the body of the luminaire.

Spotlight with Push&Go system designed to facilitate and safely accelerate the connection between product and optic accessory. Mechanically disconnecting the accessory allows it to be disengaged but not dropped. Three internal accessories and one external one can be used simultaneously. All internal accessories rotate 360° about the spotlight longitudinal axis.

Installation

Base or mains voltage track.

Colour

White (01)

Weight (Kg)

0.87

Mounting

three circuit track

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	1604	CRI (minimum):	90
W system:	18	Colour temperature [K]:	3500
lm source:	2030	MacAdam Step:	2
W source:	16	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	89.1	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	47°	Control:	DALI-2


Polar

		CIE nL 0.79 94-100-100-100-79 UGR 18.7-18.7 DIN A.61 UTE 0.79A+0.00T F*1=940 F*1+F*2=996 F*1+F*2+F*3=1000 CIBSE LG3 L<3000 cd/m² at 65° UGR<19 L<3000 cd/mq @65°		Lux			
h	d	Em	Emax				
2	1.7	470	607				
4	3.5	117	152				
6	5.2	52	67				
8	7	29	38				

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	69	65	62	60	64	62	61	58	74
1.0	73	69	66	64	68	66	65	63	79
1.5	77	74	72	70	73	71	71	68	86
2.0	80	78	76	74	76	75	74	72	91
2.5	81	80	78	77	79	77	76	74	94
3.0	82	81	80	79	80	79	78	76	96
4.0	83	82	82	81	81	81	79	77	98
5.0	84	83	83	82	82	81	80	78	99

Luminance curve limit

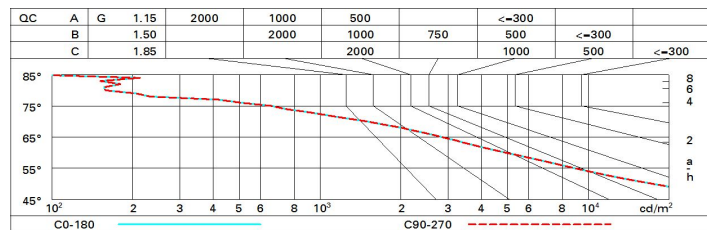

UGR diagram

Corrected UGR values (at 2030 lm bare lamp luminous flux)											
Reflect.: ceil/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	19.2	19.8	19.5	20.1	20.3	19.2	19.8	19.5	20.1	20.3
	3H	19.1	19.7	19.4	19.9	20.2	19.1	19.7	19.4	19.9	20.2
	4H	19.0	19.5	19.4	19.8	20.1	19.0	19.6	19.4	19.8	20.1
	6H	18.9	19.4	19.3	19.7	20.1	19.0	19.4	19.3	19.8	20.1
	8H	18.9	19.4	19.3	19.7	20.0	18.9	19.4	19.3	19.7	20.0
	12H	18.9	19.3	19.2	19.6	20.0	18.9	19.3	19.3	19.7	20.0
4H	2H	19.0	19.6	19.4	19.8	20.1	19.0	19.5	19.4	19.8	20.1
	3H	18.9	19.3	19.3	19.7	20.0	18.9	19.3	19.3	19.7	20.0
	4H	18.8	19.2	19.2	19.6	20.0	18.8	19.2	19.2	19.6	20.0
	6H	18.7	19.1	19.1	19.5	19.9	18.7	19.1	19.1	19.5	19.9
	8H	18.7	19.0	19.1	19.4	19.8	18.7	19.0	19.1	19.4	19.8
	12H	18.6	18.9	19.1	19.3	19.8	18.6	18.9	19.1	19.3	19.8
8H	4H	18.7	19.0	19.1	19.4	19.8	18.7	19.0	19.1	19.4	19.8
	6H	18.6	18.8	19.1	19.3	19.8	18.6	18.8	19.1	19.3	19.8
	8H	18.5	18.8	19.0	19.2	19.7	18.5	18.8	19.0	19.2	19.7
	12H	18.5	18.7	19.0	19.2	19.7	18.5	18.7	19.0	19.2	19.7
12H	4H	18.6	18.9	19.1	19.3	19.8	18.6	18.9	19.1	19.3	19.8
	6H	18.5	18.8	19.0	19.2	19.7	18.5	18.8	19.0	19.2	19.7
	8H	18.5	18.7	19.0	19.2	19.7	18.5	18.7	19.0	19.2	19.7
Variations with the observer position at spacing:											
S =	1.0H	4.0 / -8.3					4.0 / -8.3				
	1.5H	6.7 / -12.5					6.7 / -12.5				
	2.0H	8.6 / -15.4					8.6 / -15.4				