
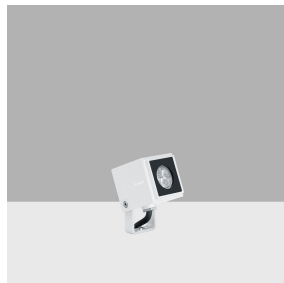


Last information update: May 2025

**Product configuration: BJ99.01**

BJ99.01: Outdoor floodlight - Warm White LED - max 500mA - Flood optic - 4.2W 348.1lm - 3000K - White

**Product code**

BJ99.01: Outdoor floodlight - Warm White LED - max 500mA - Flood optic - 4.2W 348.1lm - 3000K - White

**Technical description**

Direct light outdoor floodlight, designed to use warm white LED lamps, with flood optic. Ground, wall or ceiling installation using special adjustable bracket. The luminaire consists of an optical assembly, rear cap and adjustable bracket. The optical assembly and rear cap are made of die-cast aluminium alloy coated with liquid acrylic paint (grey finish) or textured liquid (white finish) with a high level of resistance to weather and UV rays. Transparent tempered sodium - calcium safety glass with customised grey serigraphy, 4 mm thick, joined to the optical assembly with silicone. The adjustable fixing bracket is made of painted aluminium. It has a single stainless steel M14x1 cable gland and black rubber outlet cable complete with anti-transpiration device L=300mm, electronic circuit with warm white LED and optic having a lens made of thermoplastic material (methacrylate). The electronic ballast must be ordered separately (max. 500mA). All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN60598-1 standards and particular requirements.

**Installation**

Ground, wall or ceiling installation using special bracket. Secure using screw anchors for concrete, cement and solid brick.

**Colour**

White (01)

**Weight (Kg)**

0.26

**Mounting**

free standing

**Wiring**

Electronic ballast to be ordered separately.

**Notes**

Product complete with LED lamp.

Complies with EN60598-1 and pertinent regulations


**Technical data**

Im system:	348	Rg (Gamut Index):	96
W system:	4.2	Colour temperature [K]:	3000
Im source:	590	MacAdam Step:	3
W source:	4.2	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	82.9	Life Time LED 2:	94,000h - L80 - B10 (Ta 40°C)
Im in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	59	ZVEI Code:	LED
Beam angle [°]:	34°	Number of optical assemblies:	1
CRI (minimum):	80	Intervalllo temperatura ambiente:	from -30°C to 50°C.
Rf (Colour Fidelity Index):	86	LED current [mA]:	500

**Polar**

Imax=671 cd		C0-180		Lux	
h	d1	d2	Em	Emax	
2	1.2	1.2	126	168	
4	2.4	2.4	31	42	
6	3.6	3.7	14	19	
8	4.9	4.9	8	10	

### Isolux

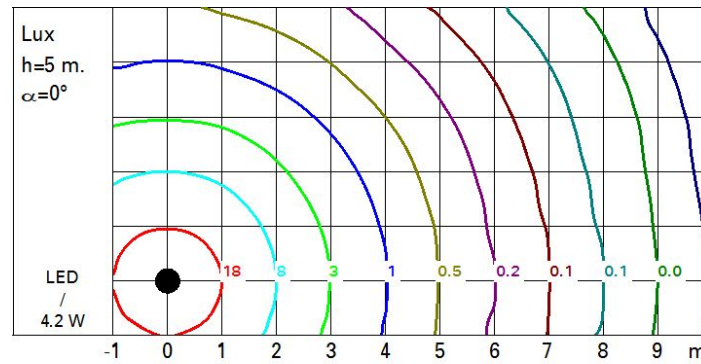

### UGR diagram

Corrected UGR values (at 590 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	19.4	20.2	19.7	20.4	20.6	19.4	20.2	19.7	20.4	20.7
	3H	19.5	20.1	19.8	20.4	20.7	19.4	20.1	19.8	20.4	20.7
	4H	19.4	20.0	19.7	20.3	20.6	19.4	20.0	19.7	20.3	20.6
	6H	19.3	19.9	19.7	20.2	20.6	19.3	19.9	19.7	20.2	20.5
	8H	19.3	19.8	19.7	20.2	20.5	19.3	19.8	19.7	20.2	20.5
	12H	19.3	19.8	19.6	20.1	20.5	19.3	19.8	19.6	20.1	20.5
4H	2H	19.4	20.0	19.7	20.3	20.6	19.4	20.0	19.8	20.3	20.6
	3H	19.4	20.0	19.8	20.3	20.7	19.4	20.0	19.8	20.3	20.7
	4H	19.4	19.9	19.8	20.2	20.6	19.4	19.9	19.8	20.2	20.6
	6H	19.3	19.7	19.8	20.1	20.5	19.3	19.7	19.8	20.1	20.6
	8H	19.3	19.6	19.7	20.1	20.5	19.3	19.7	19.7	20.1	20.5
	12H	19.2	19.6	19.7	20.0	20.5	19.2	19.6	19.7	20.0	20.5
8H	4H	19.3	19.7	19.7	20.1	20.5	19.3	19.6	19.7	20.1	20.5
	6H	19.2	19.5	19.7	20.0	20.4	19.2	19.5	19.7	20.0	20.4
	8H	19.2	19.4	19.7	19.9	20.4	19.2	19.4	19.7	19.9	20.4
	12H	19.1	19.3	19.6	19.8	20.3	19.1	19.3	19.6	19.8	20.3
12H	4H	19.2	19.6	19.7	20.0	20.5	19.2	19.6	19.7	20.0	20.4
	6H	19.2	19.4	19.7	19.9	20.4	19.2	19.4	19.6	19.9	20.4
	8H	19.1	19.3	19.6	19.8	20.3	19.1	19.3	19.6	19.8	20.3
Variations with the observer position at spacing:											
S =		1.0H	2.4 / -3.3				2.5	-3.4			
		1.5H	4.7 / -5.4				4.7	-5.4			
		2.0H	6.6 / -6.6				6.6	-7.0			