



Last information update: October 2024

**Product configuration: BK06**

BK06: Outdoor ceiling-mounted luminaire - Neutral White LED - max 500mA - Flood optic



**Product code**

BK06: Outdoor ceiling-mounted luminaire - Neutral White LED - max 500mA - Flood optic

**Technical description**

Direct light outdoor ceiling-mounted luminaire, designed to use neutral white LED lamps, with flood optic. For ceiling-mounting using the special stainless steel plate. The luminaire consists of an optical assembly, upper cap and plate for fixing to the ceiling. The optical assembly and upper cap are made of die-cast aluminium alloy coated with liquid acrylic paint (grey finish) or textured liquid (white finish) with a high level of resistance to weather and UV rays. Transparent tempered sodium - calcium safety glass with customised grey serigraphy, 4 mm thick, joined to the optical assembly with silicone. Aisi 304 stainless steel ceiling plate; a single stainless steel M14x1 cable gland and FEP outlet cables L=150mm, plus an electronic circuit with neutral white LED. The electronic ballast must be ordered separately (max. 500mA). All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN60598-1 standards and particular requirements.

**Installation**

For ceiling-mounting using the special stainless steel plate. Secure using screw anchors for concrete, cement and solid brick.

**Colour**

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

**Weight (Kg)**

0.28

**Mounting**

ceiling surface

**Wiring**

Electronic ballast to be ordered separately.

**Notes**

Product complete with LED lamp.


Complies with EN60598-1 and pertinent regulations




**Technical data**

Im system:	348	Colour temperature [K]:	4000
W system:	4.2	MacAdam Step:	3
Im source:	590	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
W source:	4.2	Life Time LED 2:	94,000h - L80 - B10 (Ta 40°C)
Luminous efficiency (Im/W, real value):	82.9	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	59	Number of optical assemblies:	1
Beam angle [°]:	34°	Intervallo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	80	LED current [mA]:	500

**Polar**

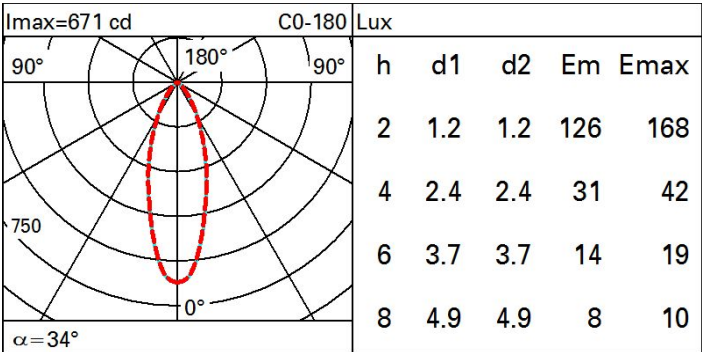

### Isolux

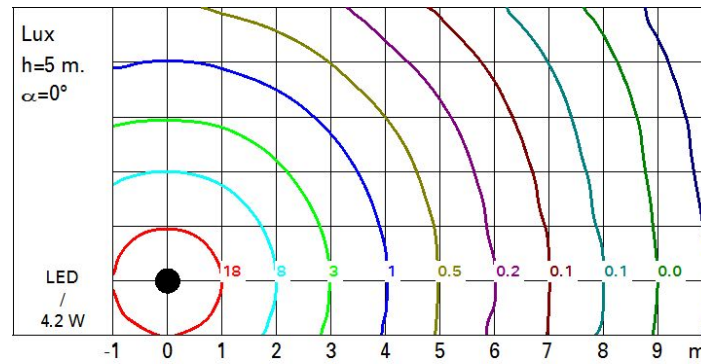

### UGR diagram

Corrected UGR values (at 590 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	19.4	20.2	19.7	20.4	20.6	19.4	20.2	19.7	20.4	20.7
	3H	19.5	20.1	19.8	20.4	20.7	19.4	20.1	19.8	20.4	20.7
	4H	19.4	20.0	19.7	20.3	20.6	19.4	20.0	19.7	20.3	20.6
	6H	19.3	19.9	19.7	20.2	20.6	19.3	19.9	19.7	20.2	20.5
	8H	19.3	19.8	19.7	20.2	20.5	19.3	19.8	19.7	20.2	20.5
	12H	19.3	19.8	19.6	20.1	20.5	19.3	19.8	19.6	20.1	20.5
4H	2H	19.4	20.0	19.7	20.3	20.6	19.4	20.0	19.8	20.3	20.6
	3H	19.4	20.0	19.8	20.3	20.7	19.4	20.0	19.8	20.3	20.7
	4H	19.4	19.9	19.8	20.2	20.6	19.4	19.9	19.8	20.2	20.6
	6H	19.3	19.7	19.8	20.1	20.5	19.3	19.7	19.8	20.1	20.6
	8H	19.3	19.6	19.7	20.1	20.5	19.3	19.7	19.7	20.1	20.5
	12H	19.2	19.6	19.7	20.0	20.5	19.2	19.6	19.7	20.0	20.5
8H	4H	19.3	19.7	19.7	20.1	20.5	19.3	19.6	19.7	20.1	20.5
	6H	19.2	19.5	19.7	20.0	20.4	19.2	19.5	19.7	20.0	20.4
	8H	19.2	19.4	19.7	19.9	20.4	19.2	19.4	19.7	19.9	20.4
	12H	19.1	19.3	19.6	19.8	20.3	19.1	19.3	19.6	19.8	20.3
12H	4H	19.2	19.6	19.7	20.0	20.5	19.2	19.6	19.7	20.0	20.4
	6H	19.2	19.4	19.7	19.9	20.4	19.2	19.4	19.6	19.9	20.4
	8H	19.1	19.3	19.6	19.8	20.3	19.1	19.3	19.6	19.8	20.3
Variations with the observer position at spacing:											
S =		1.0H	2.4	/ -3.3		2.5	/ -3.4		2.5	/ -3.4	
		1.5H	4.7	/ -5.4		4.7	/ -5.4		4.7	/ -5.4	
		2.0H	6.6	/ -6.6		6.6	/ -7.0		6.6	/ -7.0	