


Ultimo aggiornamento delle informazioni: Ottobre 2024

**Configurazione di prodotto: BK62**

BK62: Linealuce Mini - Wall-/Ceiling-mounted - Neutral White LED - 24V dc - L=1056mm - 20° Medium Optic

**Codice prodotto**

BK62: Linealuce Mini - Wall-/Ceiling-mounted - Neutral White LED - 24V dc - L=1056mm - 20° Medium Optic

**Descrizione tecnica**

Direct light luminaire, designed to use monochrome LED lamps. Ceiling- and wall-mounted. Consists of a body and supports for installation (to be ordered separately). Extruded aluminium body, with zamak die-cast end caps complete with silicone gaskets. Coated with liquid acrylic paint with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED power plate in Neutral White with 24V dc electronic circuit (ballast to be ordered separately); 24V smart driver allowing constant light flow emission despite variations in the input voltage (from 30V dc to 16V dc). Fitted with satin-finish polycarbonate film and optics with plastic (methacrylate) lens for 20° MEDIUM lighting. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

**Installazione**

The following accessories are available for installation: adjustable wall-mounted arms in AISI304 stainless steel (L=83mm code BZJ9, 200mm code BZJ8) and a plate for surface- or ceiling-mounting made of anodised aluminium (BZJ6).

**Colore**

Grigio (15)

**Montaggio**

a parete/soffitto

**Cablaggio**

The product is supplied with a single nickel-plated brass cable gland PG9 and a 2x1mm<sup>2</sup> PVC and polyurethane outlet cable, 2000mm long. For the electrical connection there is an IP68 linear connector (BZK6) and an IP67 junction box with quick-coupling terminals (BZK7). 24V dc electronic ballasts to be ordered separately: 10W (9908), 24W (9909), 72W (9910), 96W (9911), 120W (BZK0), 240W (9912) and 480W (BZK1)

**Note**

Product complete with LED lamp

Soddisfa EN60598-1 e relative note



IK05

IP66




EAC

**Dati tecnici**

Im di sistema:	828	MacAdam Step:	3
W di sistema:	14	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im di sorgente:	1240	Life Time LED 2:	66,000h - L80 - B10 (Ta 40°C)
W di sorgente:	13	Voltaggio [Vin]:	24
Efficienza luminosa (lm/W, dati di sistema):	59.1	Codice lampada:	LED
Im in modalità emergenza:	-	Numero di lampade per vano ottico:	1
Flusso totale emesso a 90° o superiore [Lm]:	0	Codice ZVEI:	LED
Light Output Ratio (L.O.R.) [%]:	67	Numero di vani ottici:	1
Angolo di apertura [°]:	14°	Intervallo temperatura ambiente operativa:	da -30°C a 50°C.
CRI (minimo):	80	Corrente LED [mA]:	350
Temperatura colore [K]:	4000	Control:	PWM

Polare

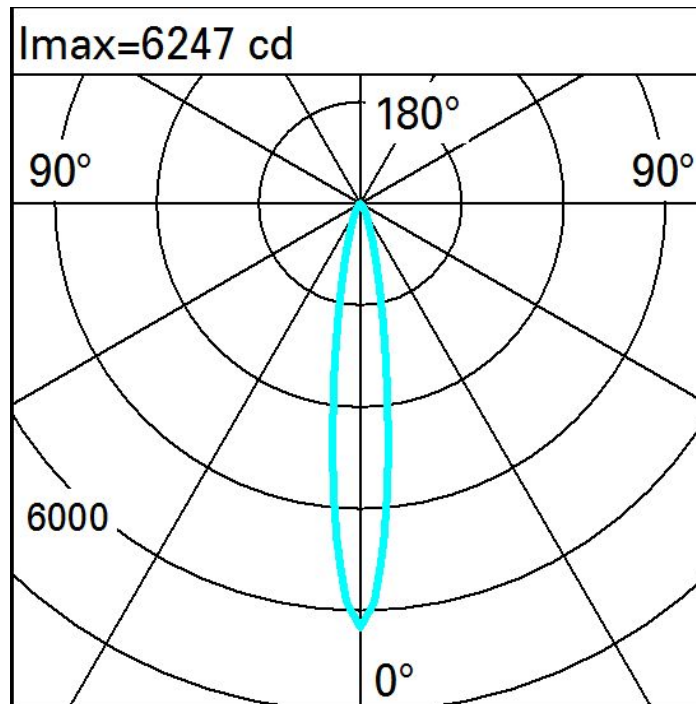

Illuminanti

Lux													Wall distance = 1m	
3														
	0.1	0.3	0.8	2	4	2	0.8	0.3	0.1					
2	0.1	0.3	0.8	2	6	10	6	2	0.8	0.3	0.1			
	0.2	0.5	1	4	11	18	11	4	1	0.5	0.2			
1	0.4	0.8	2	6	14	19	14	6	2	0.8	0.4			
	0.5	1	3	7	13	18	13	7	3	1	0.5			
0														
	m	-2	-1	0	1	2	3							