


Last information update: June 2024

Product configuration: BU24

BU24: Wall/ceiling mounted, ø89mm luminaire without an electronic transformer - Warm White - 360° blade effect

**Product code**

BU24: Wall/ceiling mounted, ø89mm luminaire without an electronic transformer - Warm White - 360° blade effect

Technical description

Wall and ceiling-mounted luminaire, designed for use with LED lamps and a patented, 360° blade effect optic. The product consists of a support base and screen. The base is made of phosphocromatization treated, die-cast aluminium, with a double base coat and passivation at 120°C. It is coated with liquid acrylic paint, cured at 150 °C to guarantee a high level of weather and UV ray resistance. The optic is made of methacrylate. All the screws used are made of A2 stainless steel.

Installation

Wall and ceiling mounted by means of a stainless steel wall fixture plate.

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)

0.5


Mounting

wall surface|ceiling surface

Wiring


Product supplied with an outlet cable L=200mm. Electronic ballast to be ordered separately.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	180	MacAdam Step:	3
W system:	9.1	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	1200	Lamp code:	LED
W source:	9.1	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	19.8	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	60	Intervallo temperatura ambiente:	from -30°C to 35°C.
Light Output Ratio (L.O.R.) [%]:	15	Lifetime of product at ambient operating temperature:	≥ 50.000h Ta=25°C
CRI (minimum):	80	LED current [mA]:	550
Colour temperature [K]:	3000		

Polar

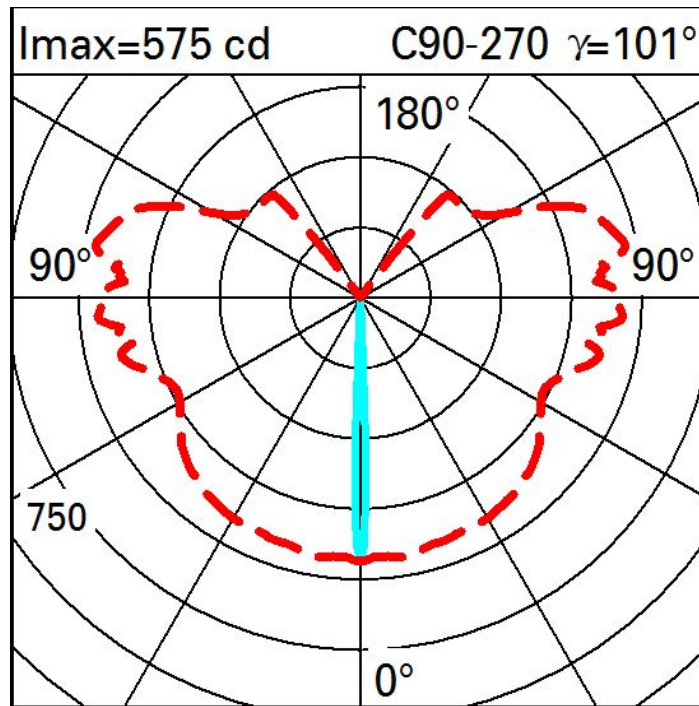

Isolux

