



Last information update: May 2025

Product configuration: BU82.15

BU82.15: Spotlight with base - Neutral White COB LED - Integrated electronic control gear - Spot optic - 19.1W 2025lm - 4000K - Grey

**Product code**

BU82.15: Spotlight with base - Neutral White COB LED - Integrated electronic control gear - Spot optic - 19.1W 2025lm - 4000K - Grey

Technical description

Spotlight designed to use LED lamps and a spot optic. Consists of an optical assembly and a base. The optical assembly, arm, base and frame holder are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The next painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The 4 mm thick, tempered, sodium-calcium, closing glass is colourless, transparent and secured with captive screws. The 50/60 Shore A silicone seal has been subject to post-cooling treatment, in an oven, for 4-6 hours at 200 °C. The optical assembly allows vertical and horizontal adjustments, with the possibility of locking the adjustment for aiming, and it has slots in the frame for rainwater drainage. The optic has a 99.93% super-pure aluminium reflector with a polished surface treatment. Complete with Neutral White colour monochrome LED circuit. The cable gland for connecting the wiring assembly to the lamp assembly is made of M11x1 stainless steel. For the power supply, the device is fitted with a black polyamide PG11 cable gland, suitable for 6.5 to 11.5 mm cables. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN60598-1 standards and particular requirements.

Installation

The luminaire can be floor, ceiling or wall-mounted using either screw anchors for concrete, cement and solid brick or various other available accessories.

Colour

Grey (15)

Weight (Kg)

2.1

Mounting

wall arm|wall surface|ground anchored|ground spike|ceiling surface

Wiring


Control gear complete with electronic ballast (220÷240Vac 50/60Hz)

Complies with EN60598-1 and pertinent regulations


**Technical data**

lm system:	2025	Colour temperature [K]:	4000
W system:	19.1	MacAdam Step:	2
lm source:	2700	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
W source:	17	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
Luminous efficiency (lm/W, real value):	106	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	75	Number of optical assemblies:	1
Beam angle [°]:	10°	Intervallo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	80	Power factor:	See installation instructions
Rf (Colour Fidelity Index):	83	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Rg (Gamut Index):	94	Control:	On/off

Polar

Imax=25841 cd		Lux				
90°	180°	90°	h	d	Em	Emax
		12	2.3	144	179	
		24	4.6	36	45	
		36	6.8	16	20	
		48	9.1	9	11	
α=11°						

Isolux

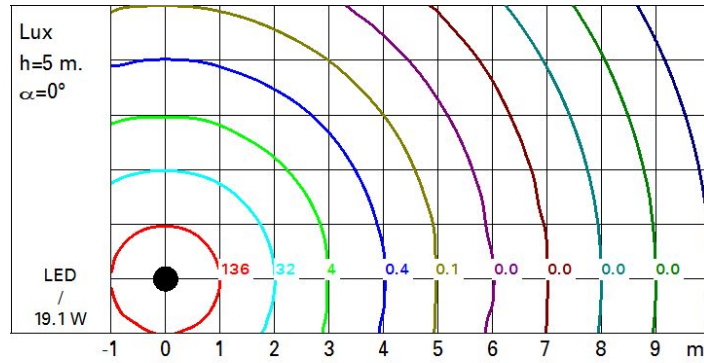

UGR diagram

Corrected UGR values (at 2700 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	0.3	2.4	0.7	2.7	3.1	0.3	2.4	0.7	2.7	3.1	3.1
	3H	0.5	2.0	0.9	2.3	2.6	0.3	1.8	0.7	2.1	2.4	2.4
	4H	0.6	1.8	1.0	2.1	2.4	0.3	1.5	0.7	1.8	2.1	2.1
	6H	0.7	1.6	1.1	1.9	2.3	0.3	1.2	0.7	1.5	1.9	1.9
	8H	0.7	1.6	1.1	2.0	2.3	0.3	1.2	0.7	1.5	1.9	1.9
	12H	0.7	1.7	1.1	2.0	2.4	0.2	1.2	0.6	1.6	1.9	1.9
4H	2H	0.3	1.5	0.7	1.8	2.1	0.6	1.8	1.0	2.1	2.4	2.4
	3H	0.6	1.6	1.0	1.9	2.3	0.7	1.7	1.1	2.0	2.4	2.4
	4H	0.6	1.8	1.1	2.2	2.6	0.6	1.8	1.1	2.2	2.6	2.6
	6H	0.5	2.3	1.0	2.7	3.2	0.4	2.2	0.9	2.6	3.1	3.1
	8H	0.5	2.4	1.0	2.8	3.3	0.3	2.2	0.8	2.7	3.2	3.2
	12H	0.4	2.4	0.9	2.8	3.4	0.2	2.2	0.7	2.7	3.2	3.2
8H	4H	0.3	2.2	0.8	2.7	3.2	0.5	2.4	1.0	2.8	3.3	3.3
	6H	0.5	2.2	1.0	2.7	3.2	0.5	2.2	1.0	2.7	3.3	3.3
	8H	0.6	2.0	1.1	2.5	3.1	0.6	2.0	1.1	2.5	3.1	3.1
	12H	0.9	1.7	1.4	2.2	2.7	0.9	1.6	1.4	2.1	2.6	2.6
12H	4H	0.2	2.2	0.7	2.7	3.2	0.4	2.4	0.9	2.8	3.4	3.4
	6H	0.6	2.0	1.1	2.5	3.0	0.6	2.0	1.1	2.5	3.1	3.1
	8H	0.9	1.6	1.4	2.1	2.6	0.9	1.7	1.4	2.2	2.7	2.7
Variations with the observer position at spacing:												
S =		1.0H	3.5 / -2.6				3.5 / -2.6					
		1.5H	6.0 / -3.1				6.0 / -3.1					
		2.0H	7.8 / -3.3				7.8 / -3.3					