


Last information update: May 2025

**Product configuration: EQ86+X486.04**

EQ86: Recessed luminaire Earth D=137 mm - Flush-mount stainless steel frame -Warm White - Adjustable Spot optic - DALI

X486.04: Outer casing in plastic for the ground, floor with stainless steel ring + closure cap - Black

**Product code**

EQ86: Recessed luminaire Earth D=137 mm - Flush-mount stainless steel frame -Warm White - Adjustable Spot optic - DALI

**Technical description**

Recessed luminaire applicable to the floor or ground, designed for fitting monochrome white LED sources, for illumination, adjustable optic, with incorporated electronic control gear. The round frame has a diameter D=137 mm; the body and frame are made of AISI 304 stainless steel with sodium-calcium extra clear glass, thickness 12mm. Stainless steel body coated with black paint. The luminaire is secured to the outer casing by means of two TORX-type screws that ensure proper anchoring. Inclusive of LED circuit, methacrylate lens and black plastic cover. The luminaire is supplied with an external orientation system (patent pending), without having to open the product, inclusive of double graduated scale: 0-30° with respect to horizontal plane and ±90° with respect to vertical axis. Black plastic (PPS) external box containing the power supply unit. The product is wired using an A2 stainless steel cable gland, with type-H07RNF 4x1 mm<sup>2</sup> outgoing power cable (L=1191 mm). The cable is equipped with an anti-transpiration device (IP68) consisting of a silicone seal placed on the power cable and housed inside the power supply box. The outer casing for installation can be ordered separately from the plastic optical assembly. The assembly made up of the frame, optical assembly and outer casing guarantees 5000 kg resistance to static loads. Maximum glass surface temperature is lower than 40°C.

**Installation**

The product is secured to the outer casing by means of two TORX-type screws. The luminaire can be installed recessed, floor-standing, using an outer casing.

**Colour**

Steel (13)

**Weight (Kg)**

1.95

**Mounting**

Floor recessed|ground recessed


**Wiring**

Product inclusive of 220-240 VAC DALI dimmable electronic control gear positioned in a separate box from the optical assembly and with outgoing cable.

**Notes**

IP68 protection rating for both the product and the power cable using IP68 connectors \* The product is not deemed suitable for installation in pools and fountains.

Complies with EN60598-1 and pertinent regulations

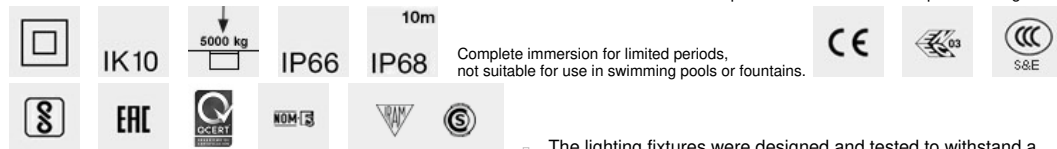

The lighting fixtures were designed and tested to withstand a static load of up to 50000 N and to resist drive-over stress by vehicles with tires. The fixtures cannot be used in lanes subjected to horizontal stresses due to acceleration, braking and / or changes of direction.

**Accessory code**

X486.04: Outer casing in plastic for the ground, floor with stainless steel ring + closure cap - Black

**Technical description**

Made of plastic (polypropylene), with stainless steel ring. Inclusive of front cap with system for extracting the cables and double cable entry.

**Installation**

Floor-standing (concrete)

**Colour**

Steel (13)


**Weight (Kg)**

0.9

**Mounting**

ground surface|Floor recessed|ground recessed


Complies with EN60598-1 and pertinent regulations



**Technical data**

Im system:	560	Life Time LED 2:	99,000h - L80 - B10 (Ta 40°C)
W system:	8.8	Lamp code:	LED
Im source:	700	Number of lamps for optical assembly:	1
W source:	6.1	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	63.6	Number of optical assemblies:	1
Im in emergency mode:	-	Intervalllo temperatura ambiente:	from -25°C to 50°C.
Total light flux at or above an angle of 90° [Lm]:	560	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	80	Inrush current:	5 A / 50 µs
Beam angle [°]:	10°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
CRI (minimum):	80	Minimum dimming %:	1
Colour temperature [K]:	3000	Overvoltage protection:	4kV Common mode & 3kV Differential mode
MacAdam Step:	2	Control:	DALI-2
Life Time LED 1:	98,000h - L80 - B10 (Ta 25°C)		

**Polar**

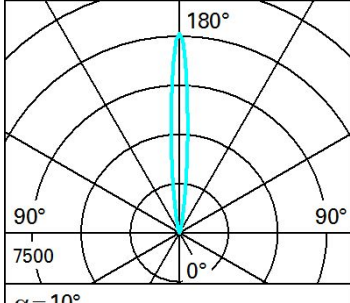Imax=10144 cd		Lux			
		h	d	Em	E <sub>max</sub>
	180°	8	1.4	118	158
		16	2.8	29	40
	90°	24	4.2	13	18
	0°	32	5.6	7	10
	7500				
$\alpha = 10^\circ$					