


Product configuration: EU72

EU72: Spotlight with bracket - Neutral White LED - Integrated Ballast - Super Spot optic - Ta 25°



EU72: Spotlight with bracket - Neutral White LED - Integrated Ballast - Super Spot optic - Ta 25°

Spotlight designed to use LED lamps and a Super Spot optic. Consists of a die-cast aluminium optical assembly, bracket and box for the ballast with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The Opti Beam Lens optical system comes complete with a Neutral White monochrome LED circuit. The electronic DALI ballast is integrated in the product and compatible with remote management systems. Compatible with programming systems via DALI terminals or an NFC system. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

Floor, ceiling or wall-mounted installation.

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

22.28

Double PG.


Complies with EN60598-1 and pertinent regulations




Im system:	12488	Lamp code:	LED
W system:	164	Number of lamps for optical assembly:	1
Im source:	16650	ZVEI Code:	LED
W source:	164	Number of optical assemblies:	1
Luminous efficiency (Im/W, real value):	76.1	Intervallo temperatura ambiente:	from -20°C to +35°C. (*)
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	11.5 A / 1320 µs
Light Output Ratio (L.O.R.) [%]:	75	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 6 luminaires B16A: 10 luminaires C10A: 10 luminaires C16A: 17 luminaires
Beam angle [°]:	4.3°	Minimum dimming %:	10
CRI (minimum):	80	Overvoltage protection:	10kV Common mode & 8kV Differential mode
Colour temperature [K]:	3000	Control:	DALI-2
MacAdam Step:	3		

EU72 EN 1 / 2

Polar

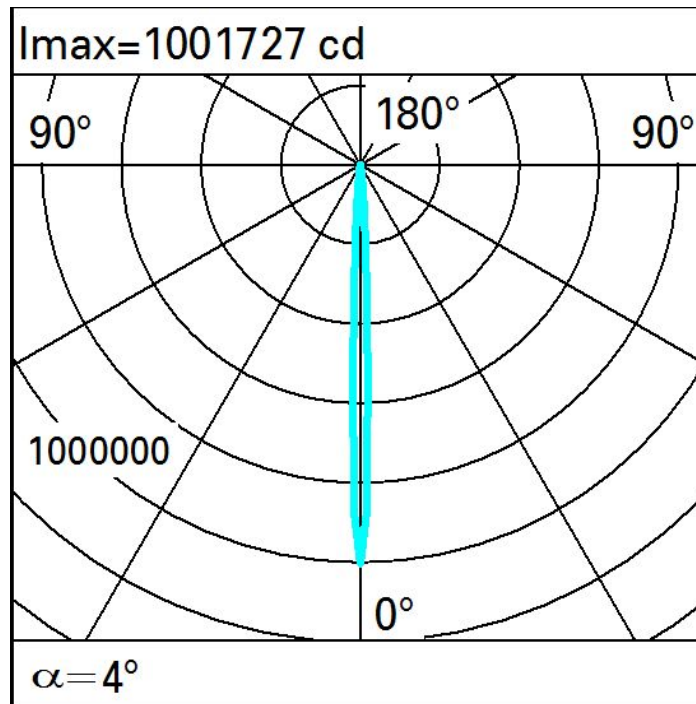

Isolux

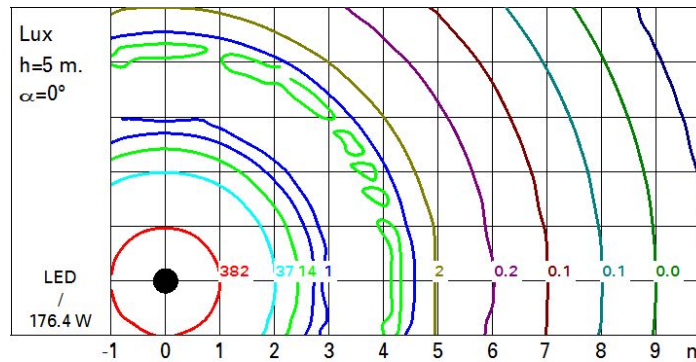

Illuminances

