

## Agorà

Design Jean-Michel  
Wilmotte

iGuzzini

Last information update: April 2025

### Product configuration: EV39

EV39: Spotlight with bracket - Tunable White - Integrated Ballast - Wide Flood optic - Ta 40°



### Product code

EV39: Spotlight with bracket - Tunable White - Integrated Ballast - Wide Flood optic - Ta 40°

### Technical description

Spotlight designed to use (White 2200K, 3000K, 4000K) LED lamps, a Wide Flood optic and a DMX512-RDM control. Consists of a die-cast aluminium optical assembly, bracket and box for the ballast with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The optical system is Opti Beam Lens. The electronic DMX ballast is integrated in the product and compatible with remote management systems. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

### Installation

Floor, ceiling or wall-mounted installation.

### Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)


### Weight (Kg)

22.28

### Wiring

Double PG.


Complies with EN60598-1 and pertinent regulations




### Technical data

Im system:	23475	MacAdam Step:	3
W system:	218.7	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
Im source:	31300	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W source:	206	Voltage [Vin]:	48
Luminous efficiency (Im/W, real value):	107.3	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	75	Number of optical assemblies:	1
Beam angle [°]:	44°	Intervalllo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	80	Control:	DMX-RDM
Colour temperature [K]:	Tunable white 2200 - 4000		

# Polar

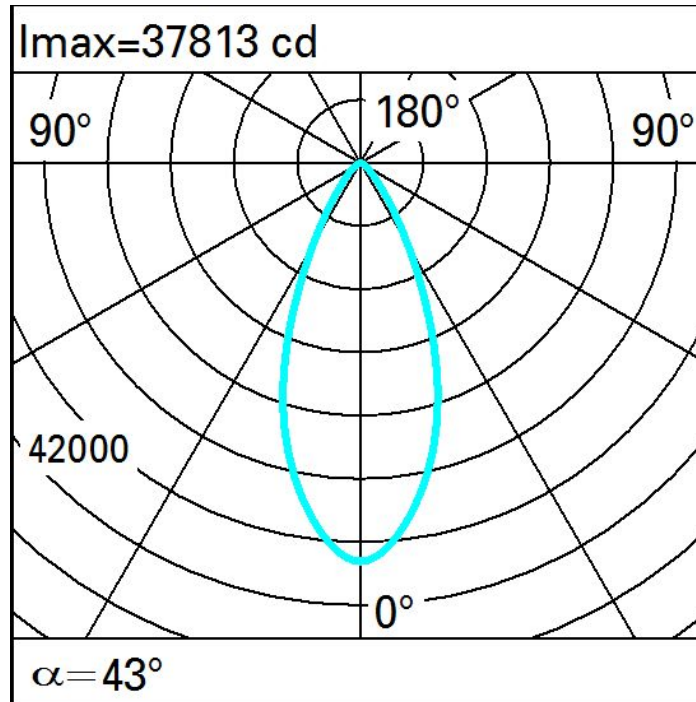

# Isolux

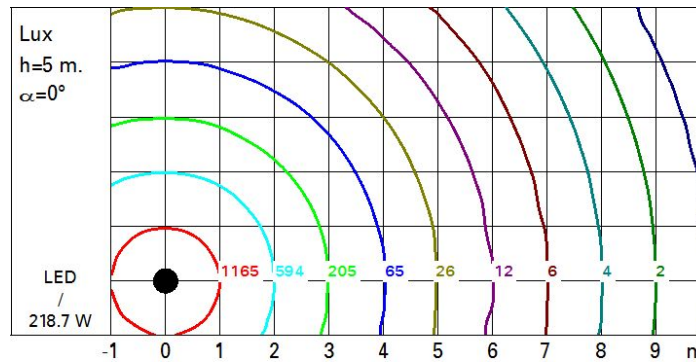

# Illuminances

