

EW02.15: Pole-mounted system – ST1 optic - Warm White - ø46-60-76mm - 110.4W 16490lm - 3000K - Grey



The spotlight can be installed with a pole-top or lateral mounting.

Colour	Weight (Kg)
Grey (15)	9.8


mounting
wall arm/pole-top

In the event of installations on insulated supports (like fibreglass poles) it is mandatory (or strongly recommended) to use the accessory code X899 to protect the luminaire from eventual faults due to electrostatic charges.


Complies with EN60598-1 and pertinent regulations



lm system:	16490	MacAdam Step:	3
W system:	110.4	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
lm source:	-	Voltage [Vin]:	230
W source:	-	Lamp code:	LED
Luminous efficiency (lm/W, real value):	149.4	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	100	Intervallo temperatura ambiente:	from -40°C to 35°C.
CRI (minimum):	70	Control:	Midnight preset/DALI NFC
Colour temperature [K]:	3000		

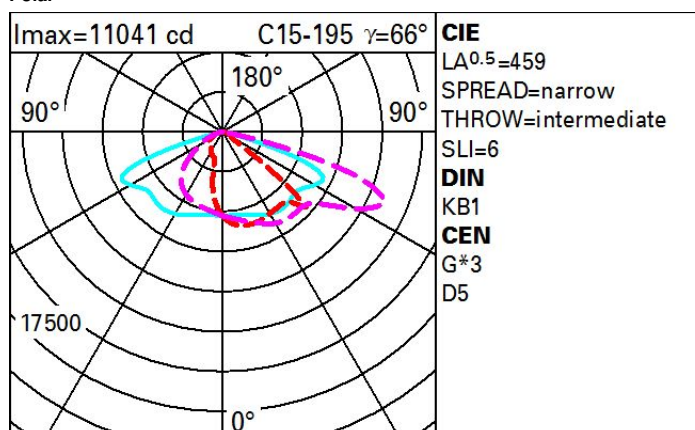

Isolux

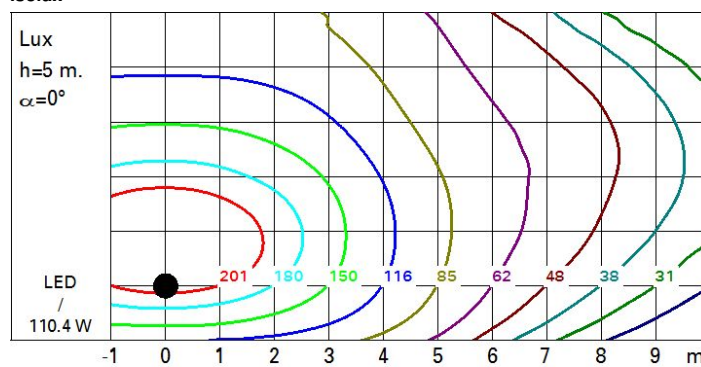

Utilisation factors

