



EZ55: 47 surface Integral – Neutral White – 220÷240Vac DALI – L=1502mm - Wall Grazing Medium optic



Im system:	3780	MacAdam Step:	3
W system:	63	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	7000	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W source:	52	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	60	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	54	Number of optical assemblies:	1
CRI (minimum):	80	Intervallo temperatura ambiente:	from -30°C to 50°C.
Colour temperature [K]:	4000	Control:	DALI-2

Polar

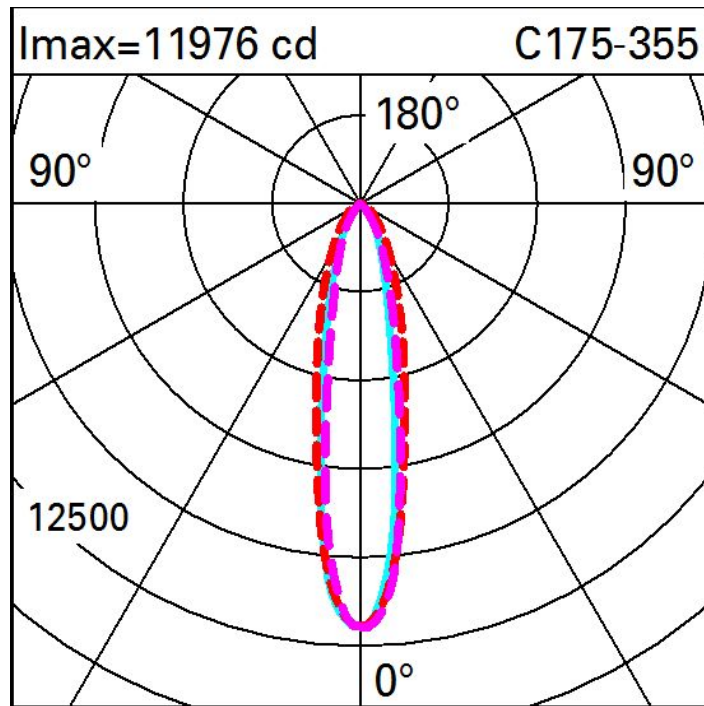

Illuminances

Lux											
						Wall distance = 1m					
3	0.6	1	3	8	18	25	18	8	3	1	0.6
2	4	8	14	26	43	54	43	26	14	8	4
1	6	11	20	43	83	107	83	43	20	11	6
0	7	12	24	53	91	119	91	53	24	12	7
	8	15	29	50	79	103	79	50	29	15	8
	m	-2	-1	0	1	2	3				