


Product configuration: **EZ95**
EZ95: 47 surface Integral – Warm White – 220÷240Vac DALI – L=908mm – Spot optic



Im system:	3081	MacAdam Step:	3
W system:	39.2	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	3900	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W source:	31	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	78.6	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	12°	Intervallo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	80	Control:	DALI-2
Colour temperature [K]:	2700		

Polar

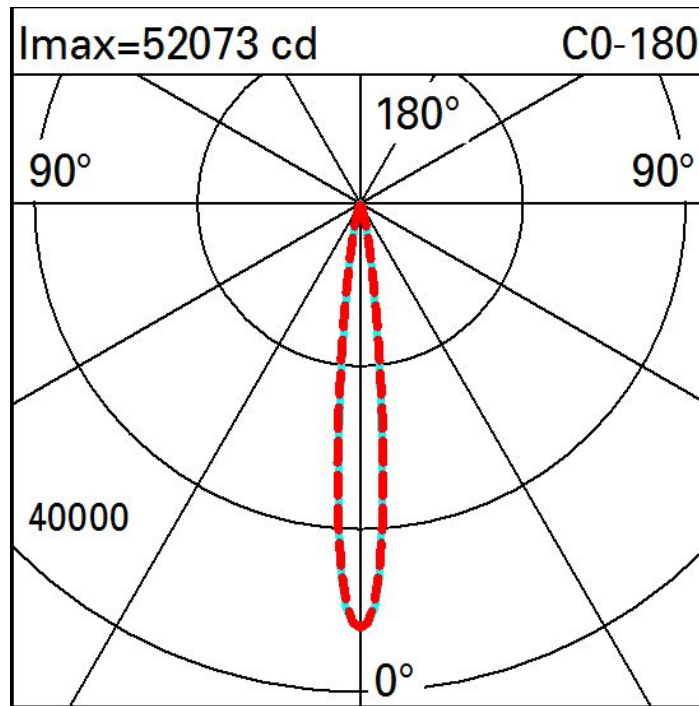

Illuminances

