

Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	66	63	68	65	65	62	77
1.0	76	72	69	68	71	69	69	66	81
1.5	80	77	75	73	76	74	73	71	87
2.0	82	80	79	77	79	78	77	74	92
2.5	84	82	81	80	81	80	79	77	95
3.0	85	84	83	82	82	82	81	79	97
4.0	86	85	84	84	84	83	82	80	99
5.0	86	86	85	85	84	84	83	81	100

Curva límite de luminancia

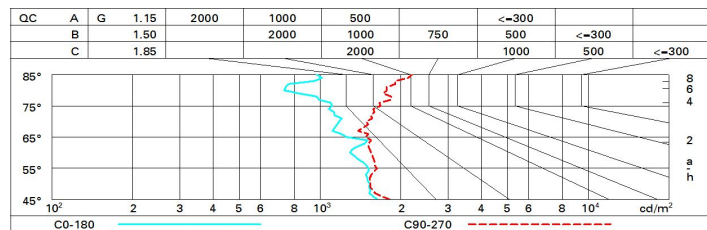


Diagrama UGR

Corrected UGR values (at 850 lm bare lamp luminous flux)											
Reflect.: ceil/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
	3H	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
	4H	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
	6H										
	8H										
	12H										
4H	2H	8.1	8.6	8.3	8.8	9.0	8.7	9.2	8.9	9.4	9.6
	3H	8.2	8.7	8.5	9.0	9.2	8.7	9.2	9.0	9.4	9.7
	4H	8.3	8.7	8.6	9.0	9.3	8.7	9.1	9.0	9.4	9.7
	6H	8.3	8.7	8.7	9.1	9.4	8.7	9.1	9.0	9.4	9.7
	8H	8.3	8.7	8.7	9.0	9.4	8.6	9.0	9.0	9.3	9.7
	12H	8.3	8.7	8.7	9.0	9.4	8.6	9.0	9.0	9.3	9.7
8H	2H	8.2	8.6	8.5	8.9	9.2	9.1	9.5	9.4	9.8	10.1
	3H	8.5	8.8	8.8	9.2	9.5	9.4	9.8	9.8	10.1	10.5
	4H	8.6	9.0	9.0	9.3	9.7	9.5	9.8	9.9	10.2	10.6
	6H	8.7	9.0	9.1	9.4	9.8	9.6	9.8	10.0	10.2	10.7
	8H	8.7	9.0	9.2	9.4	9.8	9.5	9.8	10.0	10.2	10.7
	12H	8.7	9.0	9.2	9.4	9.9	9.5	9.7	10.0	10.2	10.6
12H	4H	8.7	8.9	9.2	9.4	9.8	10.1	10.4	10.6	10.8	11.2
	6H	8.9	9.0	9.3	9.5	10.0	10.4	10.5	10.8	11.0	11.5
	8H	8.9	9.1	9.4	9.5	10.1	10.5	10.6	11.0	11.1	11.6
	12H	8.9	9.1	9.4	9.5	10.1	10.5	10.6	11.0	11.1	11.6
Variations with the observer position at spacing:											
S =	1.0H	2.6 / -2.5					1.7 / -1.7				
	1.5H	4.5 / -2.8					3.2 / -2.0				
	2.0H	6.3 / -3.6					4.8 / -2.4				