


Last information update: May 2025

**Product configuration: MN03**

MN03: wall-washer luminaire - Ø 212 mm - neutral white - frame

**Product code**

MN03: wall-washer luminaire - Ø 212 mm - neutral white - frame

**Technical description**

Recessed round wall-washer luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer to create a vertical downward beam of light. Die-cast aluminium body and passive dissipation system. Product complete with C.O.B. LED lamp in neutral white colour tone 4000K.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm

**Colour**

White / Aluminium (39)

**Weight (Kg)**

2.87

**Mounting**

ceiling recessed


**Wiring**

Product complete with DALI components

**Notes**


TPb rated

Complies with EN60598-1 and pertinent regulations

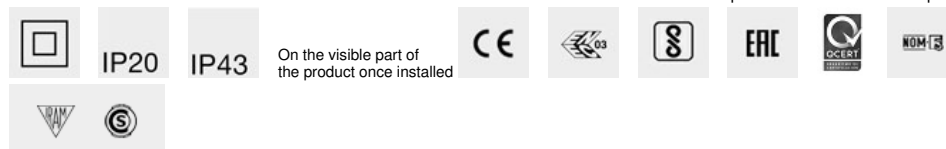**Technical data**

lm system:	3307	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	34.8	Lamp code:	LED
lm source:	5250	Number of lamps for optical assembly:	1
W source:	31	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	95	Number of optical assemblies:	1
lm in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	18 A / 250 µs
Light Output Ratio (L.O.R.) [%]:	63	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 21 luminaires B16A: 34 luminaires C10A: 35 luminaires C16A: 57 luminaires
CRI (minimum):	80	Minimum dimming %:	1
Colour temperature [K]:	4000	Overvoltage protection:	2kV Common mode & 1kV Differential mode
MacAdam Step:	2	Control:	DALI-2

Polar

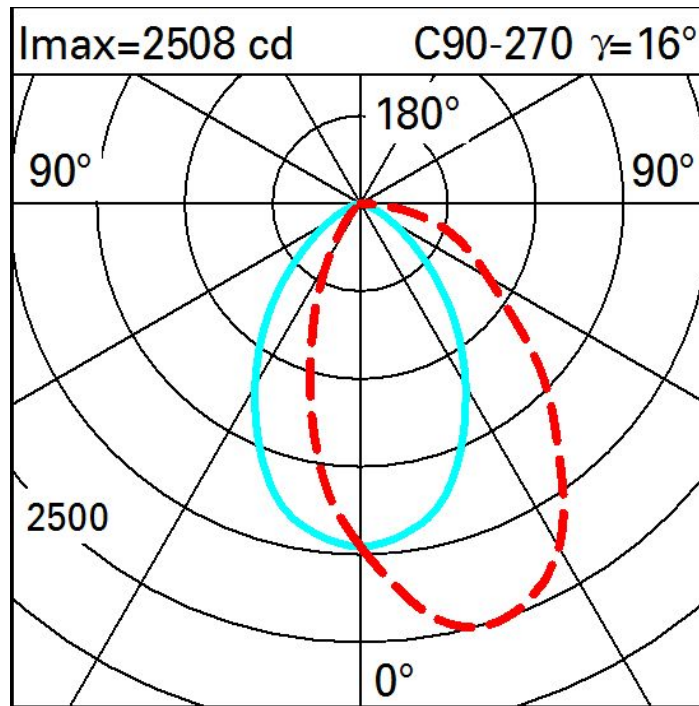

Illuminances

Lux											
						Wall distance = 1m					
3											
	1	4	19	85	305	523	305	85	19	4	1
2	6	18	51	148	376	539	376	148	51	18	6
	11	27	67	160	290	370	290	160	67	27	11
1	15	32	66	121	190	225	190	121	66	32	15
	17	32	55	86	120	134	120	86	55	32	17
0											
	m	-2	-1	0	1	2	3				