


Last information update: May 2025

Product configuration: N130.Y

N130.Y: wall-washer luminaire - Ø 125 mm - warm white - frame

**Product code**

N130.Y: wall-washer luminaire - Ø 125 mm - warm white - frame

Technical description

Recessed round wall-washer luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer to create a vertical downward beam of light. Die-cast aluminium body and passive dissipation system. Product complete with C.O.B. LED lamp in warm white colour tone 3000K (CRI 90).

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.02

Mounting

ceiling recessed


Wiring

product complete with DALI components

Notes


TPb rated

Complies with EN60598-1 and pertinent regulations

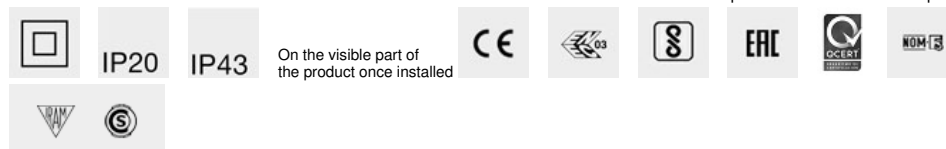**Technical data**

lm system:	1673	Colour temperature [K]:	3000
W system:	24.6	MacAdam Step:	2
lm source:	2700	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	21	Lamp code:	LED
Luminous efficiency (lm/W, real value):	68	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	62	Control:	DALI-2
CRI (minimum):	90		

Polar

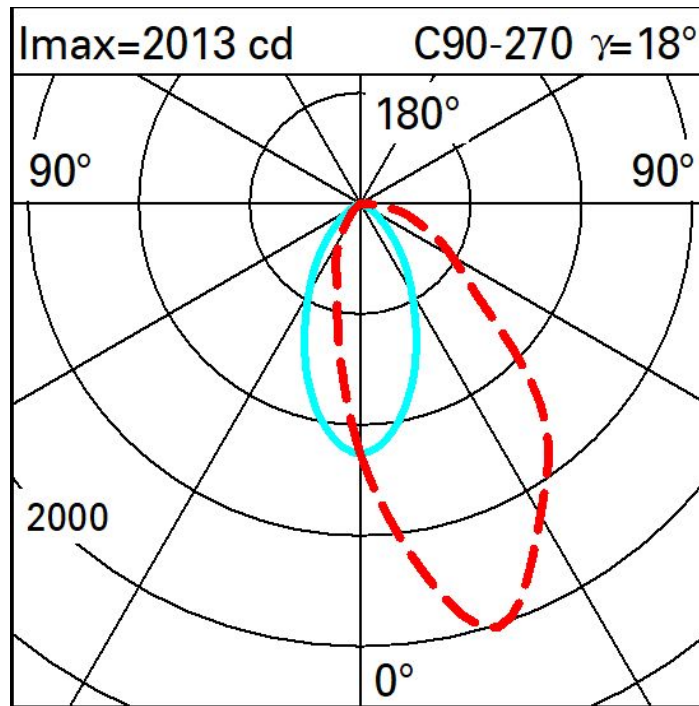

Illuminances

Lux													Wall distance = 1m	
3														
	0.3	0.9	4	23	125	284	125	23	4	0.9	0.3			
2	1	5	16	57	188	348	188	57	16	5	1			
	3	9	24	73	189	271	189	73	24	9	3			
1	5	11	26	66	126	165	126	66	26	11	5			
	6	12	26	50	81	105	81	50	26	12	6			
0														
	m	-2	-1	0	1	2	3							