


**Product configuration: N361+N372.04**

N361: Module for a continuous line L 3596Minimal

N372.04: Plate - wall washer - DALI - LED neutral - L 1196 - 17W 3100lm - 4000K - Black



## Product code

N361: Module for a continuous line L 3596Minimal

## Technical description

Minimal (frameless) version extruded aluminium intermediate profile, designed to house specific Wall Washer emission LED plates. The intermediate profile allows continuous lines to be created with other intermediate profiles and an initial profile (required).

## Installation

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately; mechanical systems for connecting modules included in the package.

<b>Colour</b>	<b>Weight (Kg)</b>
White (01)   Black (04)   Aluminium (12)	8

## Mounting

ceiling recessed ceiling surface ceiling pendant


## Wiring

The intermediate profile for a continuous line has no pass-through wiring; wiring accessories of various lengths are available to suit the composition and size of the line installed. Set up to house the LED modules required by the system.

## Notes

Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



## Product code

N372.04: Plate - wall washer - DALI - LED neutral - L 1196 - 17W 3100lm - 4000K - Black

## Technical description

LED module set up for housing in IN60 Wall Washer system initial or intermediate profiles. Extruded aluminium heat sink linear element, formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. Supplied with integrated dimmable DALI control gear. Neutral white LED.

## Installation

**Installation**  
Module insertion on profiles with a mechanical easy-push system (steel snap-on spring).

Colour	Weight (Kg)
Black (04)	1.94

## Mounting

ceiling recessed|ceiling surface|ceiling pendant

## Wiring

Quick coupling terminal block connection for simplified luminaire installation. LED module complete with integrated DALI control gear. Dimming options with DALI devices or a normally open (N.O.) pushbutton (PUSH DIM)

## Notes

The module houses the specific optic system for wall washer emission; to ensure correct installation consult the instruction leaflet.


Complies with EN60598-1 and pertinent regulations



## Technical data

Im system:	5643	CRI (minimum):	80
W system:	62.3	Colour temperature [K]:	4000
Im source:	9250	MacAdam Step:	3
W source:	51	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	90.6	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	1	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	61	Number of optical assemblies:	1

Polar

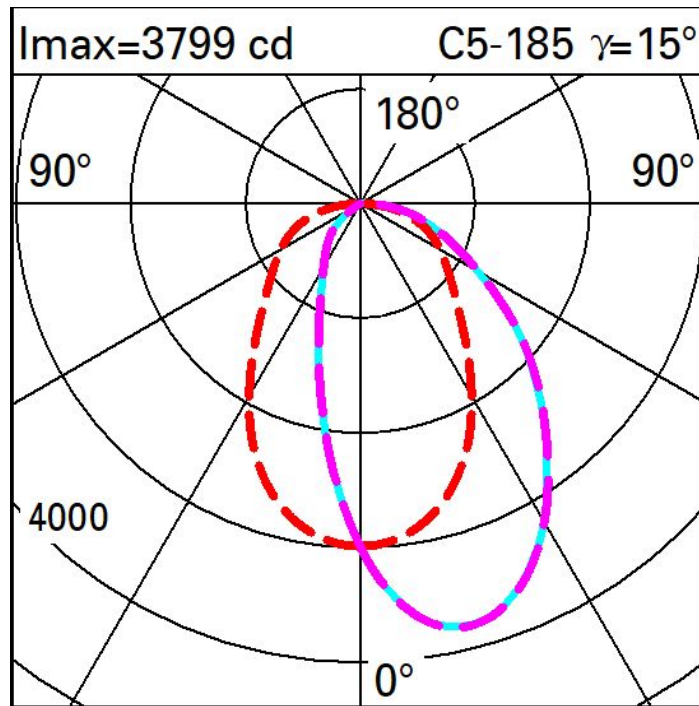

Illuminances

Lux													Wall distance = 1m	
3														
	18	37	81	191	451	679	451	191	81	37	18			
2	27	50	103	243	568	774	568	243	103	50	27			
	29	53	109	242	422	521	422	242	109	53	29			
1	30	53	102	187	277	323	277	187	102	53	30			
	29	51	87	134	176	197	176	134	87	51	29			
0														
	m	-2	-1	0	1	2	3							