


Last information update: November 2024

### Product configuration: N361+N370.04

N361: Module for a continuous line L 3596Minimal

N370.04: Plate - wall washer - ON-OFF - LED warm - L 1196 - 17W 2900lm - 3000K - Black



#### Product code

N361: Module for a continuous line L 3596Minimal

#### Technical description

Minimal (frameless) version extruded aluminium intermediate profile, designed to house specific Wall Washer emission LED plates. The intermediate profile allows continuous lines to be created with other intermediate profiles and an initial profile (required).

#### Installation

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately; mechanical systems for connecting modules included in the package.

#### Colour

White (01) | Black (04) | Aluminium (12)

#### Weight (Kg)

8

#### Mounting

ceiling recessed|ceiling surface|ceiling pendant


#### Wiring

The intermediate profile for a continuous line has no pass-through wiring; wiring accessories of various lengths are available to suit the composition and size of the line installed. Set up to house the LED modules required by the system.

#### Notes

Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations

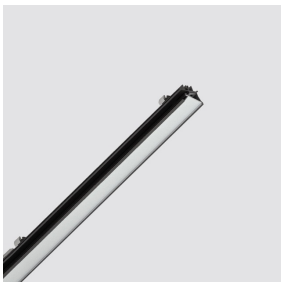

#### Product code

N370.04: Plate - wall washer - ON-OFF - LED warm - L 1196 - 17W 2900lm - 3000K - Black **Attention! Code no longer in production**

#### Technical description

LED module set up for housing in iN60 Wall Washer system initial or intermediate profiles. Extruded aluminium heat sink linear element, formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. Supplied with integrated electronic control gear. Warm white LED.

#### Installation

Module insertion on profiles with a mechanical easy-push system (steel snap-on spring).

#### Colour

Black (04)

#### Weight (Kg)

1.94

#### Mounting

ceiling recessed|ceiling surface|ceiling pendant

#### Wiring

Quick coupling terminal block connection for simplified luminaire installation. LED module complete with integrated electronic control gear.

#### Notes

The module houses the specific optic system for wall washer emission; to ensure correct installation consult the instruction leaflet.


Complies with EN60598-1 and pertinent regulations



#### Technical data

|  |      |                                       |                                 |
|--|------|---------------------------------------|---------------------------------|
| lm system:   | 5307 | CRI (minimum):                        | 80                              |
| W system:  | 59.3 | Colour temperature [K]:               | 3000                            |
| lm source:   | 8700 | MacAdam Step:                         | 3                               |
| W source:  | 51   | Life Time LED 1:                      | > 50,000h - L90 - B10 (Ta 25°C) |
| Luminous efficiency (lm/W, real value):            | 89.5 | Lamp code:                            | LED                             |
| lm in emergency mode:                              | -    | Number of lamps for optical assembly: | 1                               |
| Total light flux at or above an angle of 90° [Lm]: | 1    | ZVEI Code:                            | LED                             |
| Light Output Ratio (L.O.R.) [%]:                   | 61   | Number of optical assemblies:         | 1                               |

Polar

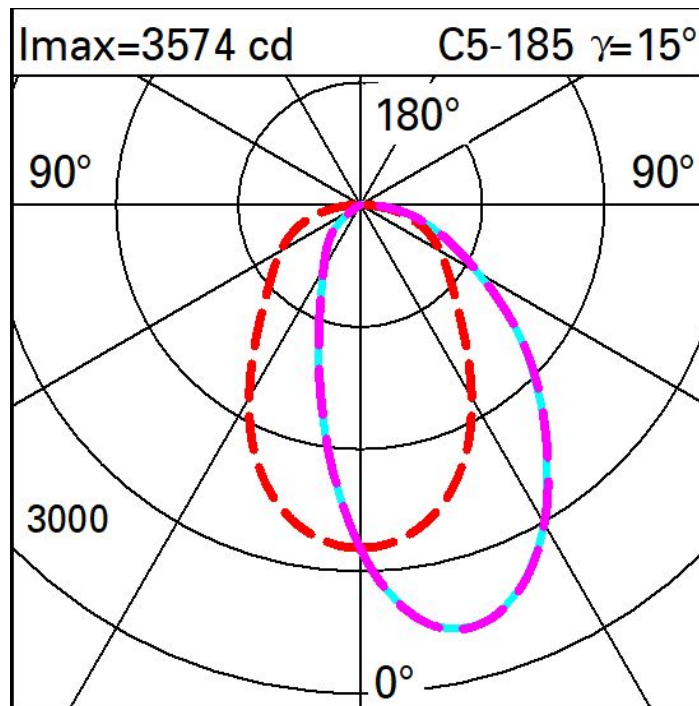

Illuminances

