

Last information update: October 2024

Product configuration: N363+N372.04

N363: Initial module L 1208Frame

N372.04: Plate - wall washer - DALI - LED neutral - L 1196 - 17W 3100lm - 4000K - Black



Product code

N363: Initial module L 1208Frame

Technical description

Frame version extruded aluminium initial profile with contact frame, designed to house a specific Wall Washer emission LED plate.

Installation

Recessed using the brackets on the profile. The initial modules can be used individually if completed with accessory caps and the required LED module.

Colour

White (01)

Weight (Kg)

2.75

Mounting

ceiling recessed


Wiring

The initial profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks for easier luminaire installation. Set up to house the LED modules required by the system.

Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



Product code

N372.04: Plate - wall washer - DALI - LED neutral - L 1196 - 17W 3100lm - 4000K - Black

Technical description

LED module set up for housing in iN60 Wall Washer system initial or intermediate profiles. Extruded aluminium heat sink linear element, formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. Supplied with integrated dimmable DALI control gear. Neutral white LED.

Installation

Module insertion on profiles with a mechanical easy-push system (steel snap-on spring).

Colour

Black (04)

Weight (Kg)

1.94

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

Quick coupling terminal block connection for simplified luminaire installation. LED module complete with integrated DALI control gear. Dimming options with DALI devices or a normally open (N.O.) pushbutton (PUSH DIM)

Notes

The module houses the specific optic system for wall washer emission; to ensure correct installation consult the instruction leaflet.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	1891	CRI (minimum):	80
W system:	20.8	Colour temperature [K]:	4000
Im source:	3100	MacAdam Step:	3
W source:	17	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	90.9	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	61	Number of optical assemblies:	1

Polar

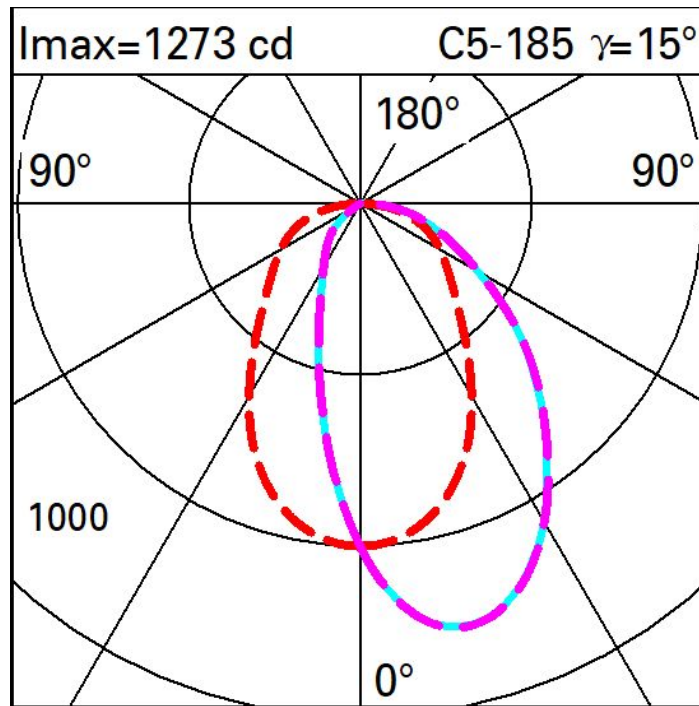

Illuminances

Lux											
						Wall distance = 1m					
3											
	6	12	27	64	151	227	151	64	27	12	6
2	9	17	35	82	190	259	190	82	35	17	9
	10	18	36	81	142	174	142	81	36	18	10
1	10	18	34	63	93	108	93	63	34	18	10
	10	17	29	45	59	66	59	45	29	17	10
0											
	m	-2	-1	0	1	2	3				