

Last information update: October 2024

Product configuration: N363+N370.04

N363: Initial module L 1208Frame

N370.04: Plate - wall washer - ON-OFF - LED warm - L 1196 - 17W 2900lm - 3000K - Black



Product code

N363: Initial module L 1208Frame

Technical description

Frame version extruded aluminium initial profile with contact frame, designed to house a specific Wall Washer emission LED plate.

Installation

Recessed using the brackets on the profile. The initial modules can be used individually if completed with accessory caps and the required LED module.

Colour

White (01)

Weight (Kg)

2.75

Mounting

ceiling recessed


Wiring

The initial profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks for easier luminaire installation. Set up to house the LED modules required by the system.

Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



Product code

N370.04: Plate - wall washer - ON-OFF - LED warm - L 1196 - 17W 2900lm - 3000K - Black **Attention! Code no longer in production**

Technical description

LED module set up for housing in iN60 Wall Washer system initial or intermediate profiles. Extruded aluminium heat sink linear element, formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. Supplied with integrated electronic control gear. Warm white LED.

Installation

Module insertion on profiles with a mechanical easy-push system (steel snap-on spring).

Colour

Black (04)

Weight (Kg)

1.94

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

Quick coupling terminal block connection for simplified luminaire installation. LED module complete with integrated electronic control gear.

Notes

The module houses the specific optic system for wall washer emission; to ensure correct installation consult the instruction leaflet.


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	1769	CRI (minimum):	80
W system:	19.8	Colour temperature [K]:	3000
lm source:	2900	MacAdam Step:	3
W source:	17	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	89.3	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	61	Number of optical assemblies:	1

Polar

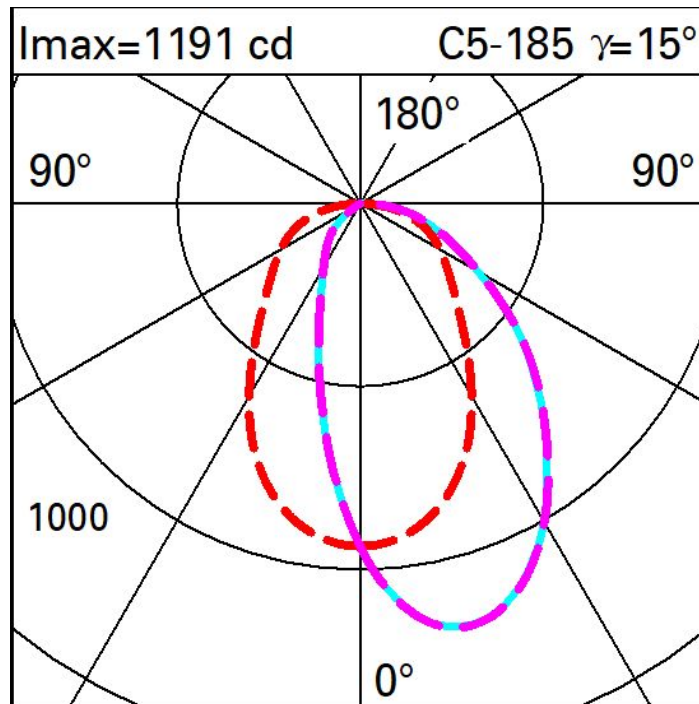

Illuminances

Lux											
						Wall distance = 1m					
3											
	6	11	25	60	142	213	142	60	25	11	6
2	9	16	32	76	178	243	178	76	32	16	9
	9	17	34	76	132	163	132	76	34	17	9
1	9	17	32	59	87	101	87	59	32	17	9
	9	16	27	42	55	62	55	42	27	16	9
0											
	m	-2	-1	0	1	2	3				