


Last information update: May 2025

Product configuration: P359.47

P359.47: Adjustable (tilting) round recessed luminaire - LED - wide flood - Black / White

**Product code**

P359.47: Adjustable (tilting) round recessed luminaire - LED - wide flood - Black / White

Technical description

Round recessed luminaire with contact frame. Adjustable version that tilts by a maximum of 30°. The main swivel body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. Metallised, thermoplastic, high definition reflector - wide flood optic (42°). Structure with die-cast aluminium external contact frame with a single white finish. Steel rotating parts. The ring inside the swivel body is made of thermoplastic available in a range of painted and metallised finishes. Safety glass included Quick and easy tool free assembly. High color rendering index 3,000K LED. Power unit available with a separate code no.

Installation

Recessed in a false ceiling by means of an anti-fall steel wire spring - minimum thickness of false ceiling: 1 mm - preparation hole Ø 75 mm.

Colour

Black / White (47)

Weight (Kg)

0.23

Mounting

wall recessed|ceiling recessed

Wiring

Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

Notes

To reduce the glare caused by the internal wall of the recess when the luminaire has been rotated, a black, snap on accessory ring is available. A wide range of decorative accessories and diffusers is also available.

Complies with EN60598-1 and pertinent regulations



IP20

IP23

On the visible part of the product once installed

**Technical data**

Im system:	1041
W system:	10
Im source:	1320
W source:	10
Luminous efficiency (lm/W, real value):	104.1
Im in emergency mode:	-
Total light flux at or above an angle of 90° [Lm]:	0
Light Output Ratio (L.O.R.) [%]:	79
Beam angle [°]:	44°

CRI (minimum):	90
Colour temperature [K]:	3000
MacAdam Step:	2
Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Lamp code:	LED
Number of lamps for optical assembly:	1
ZVEI Code:	LED
Number of optical assemblies:	1
LED current [mA]:	300


Polar

Imax=2083 cd	CIE nL 0.79 99-100-100-100-79 UGR <10-10 DIN A.61 UTE 0.79A+0.00T F*1=995 F*1.4+F*2=999 F*1.4+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<10 L<1500 cd/mq @65°	Lux
90°		h d Em Emax
180°		2 1.6 428 521
90°		4 3.3 107 130
2000		6 4.9 48 58
0°		8 6.5 27 33
α = 44°		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	65	63	67	64	64	62	78
1.0	74	71	69	67	70	68	68	65	83
1.5	78	75	74	72	75	73	72	70	88
2.0	80	79	77	76	77	76	75	73	93
2.5	82	81	79	79	79	78	78	75	96
3.0	83	82	81	80	81	80	79	77	98
4.0	84	83	83	82	82	81	80	78	99
5.0	84	84	83	83	83	82	81	79	100

Luminance curve limit

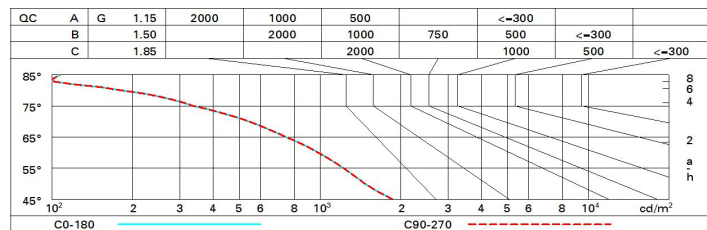

UGR diagram

Corrected UGR values (at 1320 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
	3H	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
	4H	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
	6H										
	8H										
	12H										
4H	2H	0.5	7.0	0.7	7.3	7.5	0.5	7.0	0.7	7.3	7.5
	3H	0.4	0.9	0.7	7.2	7.5	0.4	0.9	0.7	7.2	7.4
	4H	0.3	0.8	0.7	7.1	7.4	0.3	0.8	0.6	7.1	7.4
	6H	0.3	0.7	0.6	7.0	7.3	0.2	0.7	0.6	7.0	7.3
	8H	0.2	0.7	0.6	7.0	7.3	0.2	0.6	0.6	7.0	7.3
	12H	0.2	0.6	0.6	0.9	7.3	0.2	0.6	0.5	0.9	7.3
4H	2H	0.3	0.8	0.6	7.1	7.4	0.3	0.8	0.7	7.1	7.4
	3H	0.2	0.6	0.6	7.0	7.3	0.2	0.6	0.6	7.0	7.3
	4H	0.2	0.5	0.6	0.9	7.3	0.2	0.5	0.6	0.9	7.3
	6H	0.1	0.4	0.5	0.8	7.2	0.1	0.4	0.5	0.8	7.2
	8H	0.0	0.3	0.5	0.7	7.2	0.0	0.3	0.5	0.7	7.2
	12H	0.0	0.2	0.4	0.7	7.1	0.0	0.2	0.4	0.7	7.1
8H	4H	0.0	0.3	0.5	0.7	7.2	0.0	0.3	0.5	0.7	7.2
	6H	0.0	0.2	0.4	0.6	7.1	0.0	0.2	0.4	0.6	7.1
	8H	5.9	6.1	0.4	0.6	7.1	5.9	6.1	0.4	0.6	7.1
	12H	5.9	6.0	0.4	0.5	7.0	5.9	6.0	0.4	0.5	7.0
12H	4H	0.0	0.2	0.4	0.7	7.1	0.0	0.2	0.4	0.7	7.1
	6H	5.9	6.1	0.4	0.6	7.1	5.9	6.1	0.4	0.6	7.1
	8H	5.9	6.0	0.4	0.5	7.0	5.9	6.0	0.4	0.5	7.0
Variations with the observer position at spacing:											
S =	1.0H	6.4 / -7.8					6.4 / -7.8				
	1.5H	9.2 / -9.0					9.2 / -9.0				
	2.0H	11.2 / -10.1					11.2 / -10.1				