


Design iGuzzini iGuzzini

P517: Runde, starre Einbauleuchte - Ø125mm - Warm White - weiße Optik - DALI

Wirkungsgrad

R	77	75	73	71	55	53	33	00	DRR
K0.8	58	52	48	45	52	48	47	44	58
1.0	62	57	53	50	56	52	52	48	64
1.5	68	64	61	58	63	60	59	55	74
2.0	72	68	66	63	67	65	64	60	81
2.5	74	71	69	67	70	68	67	64	85
3.0	75	73	71	69	71	70	69	66	88
4.0	77	75	74	72	73	72	71	68	91
5.0	78	76	75	74	75	74	72	70	93

Söller-Diagramm

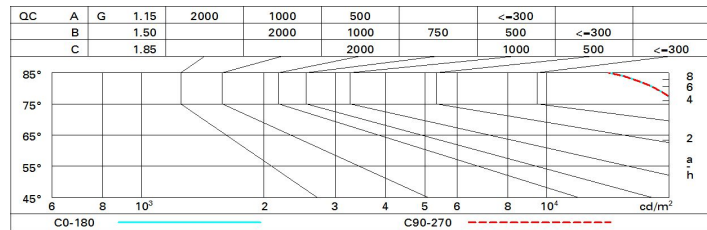

UGR-Diagramm

Corrected UGR values (at 2250 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		x					y				
2H	2H	23.1	24.0	23.4	24.3	24.5	23.1	24.0	23.4	24.3	24.5
	3H	24.1	24.9	24.4	25.2	25.5	23.4	24.2	23.7	24.5	24.8
	4H	24.5	25.3	24.8	25.6	25.9	23.5	24.2	23.8	24.5	24.9
	6H	24.8	25.5	25.2	25.9	26.2	23.5	24.2	23.8	24.5	24.9
	8H	24.9	25.6	25.3	25.9	26.3	23.5	24.2	23.8	24.5	24.9
	12H	25.0	25.6	25.4	26.0	26.3	23.4	24.1	23.8	24.5	24.8
4H	2H	23.5	24.2	23.8	24.5	24.9	24.5	25.3	24.8	25.6	25.9
	3H	24.7	25.3	25.1	25.7	26.0	25.0	25.7	25.4	26.0	26.4
	4H	25.2	25.8	25.6	26.2	26.6	25.2	25.8	25.6	26.2	26.6
	6H	25.7	26.2	26.1	26.6	27.0	25.4	25.9	25.8	26.3	26.7
	8H	25.8	26.3	26.2	26.7	27.1	25.4	25.9	25.9	26.3	26.8
	12H	25.9	26.3	26.3	26.7	27.2	25.4	25.8	25.9	26.3	26.7
8H	4H	25.4	25.9	25.9	26.3	26.8	25.8	26.3	26.2	26.7	27.1
	6H	26.0	26.4	26.4	26.8	27.3	26.1	26.5	26.5	26.9	27.4
	8H	26.2	26.5	26.7	27.0	27.5	26.2	26.5	26.7	27.0	27.5
	12H	26.3	26.6	26.8	27.1	27.6	26.2	26.5	26.7	27.0	27.5
12H	4H	25.4	25.8	25.9	26.3	26.7	25.9	26.3	26.3	26.7	27.2
	6H	26.0	26.3	26.5	26.8	27.3	26.2	26.5	26.7	27.0	27.5
	8H	26.2	26.5	26.7	27.0	27.5	26.3	26.6	26.8	27.1	27.6
Variations with the observer position at spacing:											
S =		1.0H	0.7 / -0.5				0.7 / -0.5				
		1.5H	1.3 / -0.8				1.3 / -0.8				
		2.0H	2.3 / -1.0				2.3 / -1.0				