

Last information update: December 2024

Product configuration: P641

P641: medium body - warm white - wide flood optic

**Product code**

P641: medium body - warm white - wide flood optic

Technical description

Adjustable spotlight with adapter for installation on electrified track for a linear PCB LED lamp with a Warm White (3000K) tone. Product complete with super pure anodized aluminium reflector to guarantee wide flood light distribution. DALI ballast integrated in the body. Die-cast aluminium optical assembly. Rotates 360° about the vertical axis and tilts 90° relative to the horizontal plane. Passive heat dissipation. Option of installing a range of outdoor accessories including an anti-glare and an asymmetric screen.

Installation

On an electrified track or base

Colour

Black (04) | Black / White (47)

Weight (Kg)

1.35


Mounting

three circuit track|ceiling surface

Wiring

Product complete with electronic components

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	2633	CRI (minimum):	90
W system:	29.7	Colour temperature [K]:	3000
lm source:	3250	MacAdam Step:	3
W source:	26	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	88.6	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	84° / 102°	Control:	DALI-2


Polar

	Imax=1226 cd				
	C0-180				
	CIE nL 0.81 63-91-99-100-81 UGR 26.5-31.9				
	DIN A.51 UTE 0.81C+0.00T F*1=631 F*1+F*2=913 F*1+F*2+F*3=990				
	Lux				
	h	d1	d2	Em	Emax
	1	1.8	2.5	807	1224
	2	3.6	4.9	202	306
	3	5.3	7.4	90	136
	4	7.1	9.9	50	76

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	59	52	47	43	51	46	46	41	51
1.0	64	58	53	49	57	52	52	47	58
1.5	72	67	63	59	65	62	61	57	70
2.0	76	72	69	66	71	68	67	63	78
2.5	79	75	73	70	74	71	70	67	83
3.0	80	78	75	73	76	74	73	69	86
4.0	82	80	78	76	78	77	75	72	89
5.0	83	81	80	78	80	78	77	74	91

Luminance curve limit

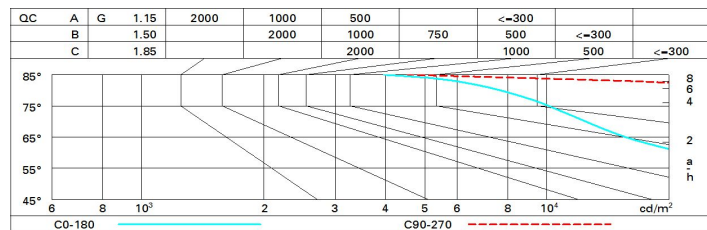

UGR diagram

Corrected UGR values (at 3250 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	25.9	26.8	26.2	27.1	27.3	30.5	31.4	30.8	31.6	31.9
	3H	25.9	26.7	26.2	27.0	27.3	30.6	31.4	30.9	31.6	31.9
	4H	25.8	26.6	26.2	26.9	27.2	30.5	31.3	30.9	31.6	31.9
	6H	25.8	26.5	26.2	26.8	27.1	30.4	31.1	30.8	31.4	31.8
	8H	25.8	26.4	26.1	26.8	27.1	30.4	31.1	30.8	31.4	31.7
	12H	25.7	26.4	26.1	26.7	27.1	30.4	31.0	30.7	31.3	31.7
4H	2H	26.6	27.4	27.0	27.7	28.0	31.7	32.5	32.1	32.8	33.1
	3H	26.6	27.2	27.0	27.6	27.9	32.0	32.6	32.4	33.0	33.3
	4H	26.5	27.1	27.0	27.5	27.9	32.0	32.5	32.4	32.9	33.3
	6H	26.5	27.0	26.9	27.4	27.8	31.9	32.4	32.4	32.8	33.3
	8H	26.5	26.9	26.9	27.3	27.8	31.9	32.3	32.3	32.8	33.2
	12H	26.4	26.8	26.9	27.3	27.7	31.9	32.3	32.3	32.7	33.2
8H	4H	26.7	27.2	27.2	27.6	28.0	32.2	32.6	32.6	33.0	33.5
	6H	26.7	27.1	27.2	27.5	28.0	32.2	32.5	32.7	33.0	33.5
	8H	26.7	27.0	27.1	27.4	27.9	32.2	32.5	32.6	32.9	33.4
	12H	26.6	26.9	27.1	27.4	27.9	32.1	32.4	32.6	32.9	33.4
12H	4H	26.7	27.1	27.2	27.6	28.0	32.1	32.5	32.6	33.0	33.4
	6H	26.7	27.0	27.2	27.5	28.0	32.1	32.5	32.6	32.9	33.4
	8H	26.7	26.9	27.2	27.4	28.0	32.1	32.4	32.6	32.9	33.4
Variations with the observer position at spacing:											
S =		1.0H					1.3 / -2.8				
		1.5H					2.3 / -5.1				
		2.0H					3.6 / -6.5				
							0.3 / -0.3				
							0.6 / -1.1				
							1.3 / -1.6				