


Last information update: June 2025

#### Product configuration: RU44.12+PI30.D8

RU44.12: Minimal Down linear module - Surface or Pendant-mounted - for MMO/Space/Wall Washer versions - L=3576 - Aluminium  
PI30.D8: Plate with Warm White LED - Space optic - Downlight - General Light - HO - DALI - L=1192 - 27.7W 3534.8lm - 3000K - White Transparent



#### Product code

RU44.12: Minimal Down linear module - Surface or Pendant-mounted - for MMO/Space/Wall Washer versions - L=3576 - Aluminium

#### Technical description

Minimal (Frameless) version with extruded aluminium profile for surface or pendant-mounted application. Designed for use with LED plates in MMO, Space and Wall Washer versions. Version with direct light (Down) and indirect light (Up) option.

#### Installation

Can be surface or pendant-mounted using accessories to be ordered separately.

#### Colour

Aluminium (12)


#### Weight (Kg)

5.76

#### Wiring

Designed to house the LED modules that can be used by the system.

Complies with EN60598-1 and pertinent regulations



#### Product code

PI30.D8: Plate with Warm White LED - Space optic - Downlight - General Light - HO - DALI - L=1192 - 27.7W 3534.8lm - 3000K - White Transparent

#### Technical description

Warm White LED plate with direct (Down) emission in a version with a Space optic available in a Transparent White and a Transparent Black version. Translucent textured thermoplastic raster, created with a catadioptric system (patented Opti Diamond optic) - with no galvanic treatments - combined with a PP cover with a gloss finish and an additional diffuser screen. The resulting optic system generates an extremely elegant and professional light emission. General Light High Output (HO) version luminaire. The module optic and structural fittings allow high luminous flux and system efficiency values. DALI dimmable power supply integrated in the luminaire. Extruded aluminium heat sink and "Halogen Free" electric cables. Moulded and metallised polycarbonate raster.

#### Installation

Module insertion on profiles facilitated by a quick coupling system.

#### Colour

White Transparent (D8)

#### Weight (Kg)

1.07

#### Wiring

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated dimmable DALI power supply.

#### Notes

TPa version available on request, contact iGuzzini for more info.


Complies with EN60598-1 and pertinent regulations



# Technical data

Im system:	12389	Rg (Gamut Index):	95
W system:	82.9	Colour temperature [K]:	3000
Im source:	14930	MacAdam Step:	3
W source:	73	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	149.4	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	83	ZVEI Code:	LED
CRI (minimum):	80	Number of optical assemblies:	1
Rf (Colour Fidelity Index):	85	Control:	DALI-2


# Polar

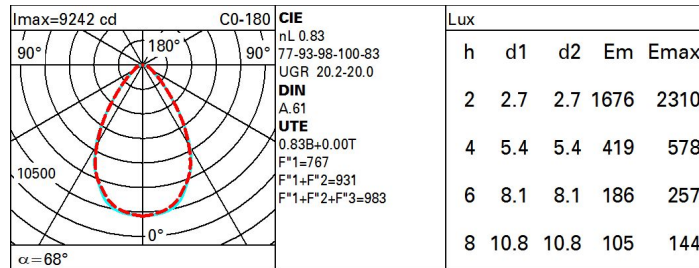

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	60	56	52	59	55	55	51	61
1.0	70	65	61	58	64	60	60	56	67
1.5	76	72	69	66	71	68	67	63	76
2.0	80	77	74	72	75	73	72	69	83
2.5	82	80	77	75	78	76	75	72	87
3.0	84	82	80	78	80	78	77	74	89
4.0	85	84	82	81	82	81	79	77	92
5.0	86	85	83	82	83	82	81	78	94

# Luminance curve limit

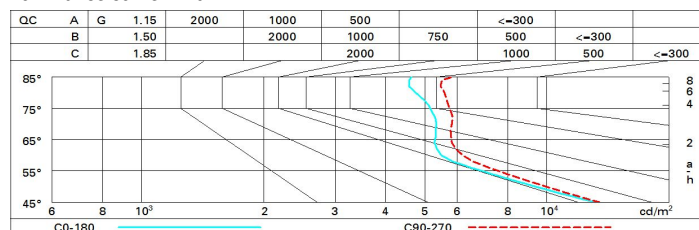

# UGR diagram

Corrected UGR values (at 14930 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	18.2	18.9	18.4	19.2	19.4	18.2	19.0	18.5	19.2	19.5	
	3H	18.8	19.5	19.1	19.7	20.0	18.4	19.1	18.7	19.3	19.6	
	4H	19.1	19.8	19.4	20.1	20.4	18.4	19.0	18.7	19.3	19.6	
	6H	19.4	20.0	19.8	20.3	20.6	18.4	19.0	18.7	19.3	19.6	
	8H	19.5	20.1	19.9	20.4	20.8	18.4	18.9	18.7	19.3	19.6	
	12H	19.6	20.1	20.0	20.5	20.8	18.3	18.9	18.7	19.2	19.6	
4H	2H	18.3	19.0	18.7	19.3	19.6	19.4	20.0	19.7	20.3	20.6	
	3H	19.1	19.7	19.5	20.0	20.4	19.7	20.3	20.1	20.6	21.0	
	4H	19.6	20.1	20.0	20.5	20.8	19.9	20.4	20.3	20.8	21.2	
	6H	20.0	20.4	20.4	20.8	21.3	20.0	20.4	20.4	20.8	21.3	
	8H	20.2	20.6	20.6	21.0	21.4	20.0	20.4	20.5	20.8	21.3	
	12H	20.3	20.6	20.7	21.1	21.5	20.0	20.4	20.5	20.8	21.3	
8H	4H	19.8	20.2	20.2	20.6	21.0	20.6	21.0	21.1	21.4	21.9	
	6H	20.3	20.6	20.8	21.1	21.6	20.9	21.2	21.4	21.7	22.1	
	8H	20.5	20.8	21.0	21.3	21.8	21.0	21.3	21.5	21.7	22.2	
	12H	20.7	21.0	21.2	21.4	22.0	21.1	21.3	21.6	21.8	22.3	
12H	4H	19.8	20.1	20.2	20.6	21.0	20.8	21.2	21.3	21.6	22.0	
	6H	20.3	20.6	20.8	21.1	21.6	21.1	21.4	21.6	21.9	22.4	
	8H	20.6	20.8	21.1	21.3	21.9	21.3	21.5	21.8	22.0	22.5	
Variations with the observer position at spacing:												
S =		1.0H	0.8 / -0.8		0.6 / -0.6							
		1.5H	1.7 / -1.3		1.4 / -1.1							
		2.0H	2.9 / -1.4		2.5 / -1.2							