


Q262: incasso circolare fisso - Ø125 mm - tunable white

# Coefficienti di utilizzazione

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	63	61	65	63	62	60	75
1.0	73	70	67	65	69	67	66	64	80
1.5	77	75	73	71	74	72	71	69	87
2.0	80	78	76	75	77	75	75	72	92
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	80	79	78	76	97
4.0	84	83	82	82	81	81	80	78	98
5.0	84	84	83	83	82	82	80	78	99

## Curva limite di luminanza

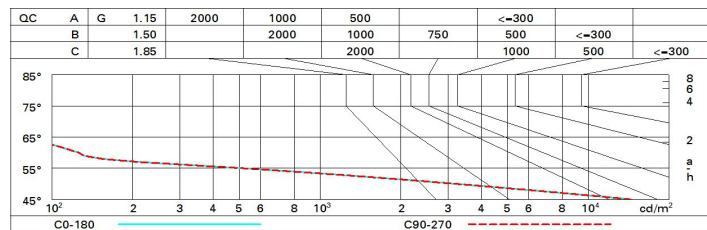

## Diagramma UGR

Corrected UGR values (at 2100 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	18.8	19.4	19.1	19.7	19.9	18.8	19.4	19.1	19.7	19.9
	3H	18.7	19.2	19.0	19.5	19.8	18.7	19.2	19.0	19.5	19.8
	4H	18.6	19.1	18.9	19.4	19.7	18.6	19.1	18.9	19.4	19.7
	6H	18.5	19.0	18.9	19.3	19.6	18.5	19.0	18.9	19.3	19.6
	8H	18.5	18.9	18.9	19.3	19.6	18.5	18.9	18.9	19.3	19.6
	12H	18.5	18.9	18.8	19.2	19.6	18.5	18.9	18.8	19.2	19.6
4H	2H	18.6	19.1	18.9	19.4	19.7	18.6	19.1	18.9	19.4	19.7
	3H	18.5	18.9	18.8	19.2	19.6	18.5	18.9	18.8	19.2	19.6
	4H	18.4	18.7	18.8	19.1	19.5	18.4	18.7	18.8	19.1	19.5
	6H	18.3	18.6	18.7	19.0	19.4	18.3	18.6	18.7	19.0	19.4
	8H	18.2	18.5	18.7	18.9	19.4	18.2	18.5	18.7	18.9	19.4
	12H	18.2	18.5	18.6	18.9	19.3	18.2	18.5	18.6	18.9	19.3
8H	4H	18.2	18.5	18.7	18.9	19.4	18.2	18.5	18.7	18.9	19.4
	6H	18.1	18.4	18.6	18.8	19.3	18.1	18.4	18.6	18.8	19.3
	8H	18.1	18.3	18.6	18.8	19.3	18.1	18.3	18.6	18.8	19.3
	12H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2
12H	4H	18.2	18.5	18.6	18.9	19.3	18.2	18.5	18.6	18.9	19.3
	6H	18.1	18.3	18.6	18.8	19.3	18.1	18.3	18.6	18.8	19.3
	8H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2
Variations with the observer position at spacing:											
S =	1.0H	4.6 / -25.8					4.6 / -25.8				
	1.5H	7.4 / -32.6					7.4 / -32.6				
	2.0H	9.4 / -33.5					9.4 / -33.5				