

Last information update: November 2024

### Product configuration: Q361+Q412.12

Q361: Frame continuous line moduleGeneral Down LightL 3594

Q412.12: Plate - General Down Light - Warm LED - L 1196 - 3000K - CRI 80 - Aluminium



#### Product code

Q361: Frame continuous line moduleGeneral Down LightL 3594

#### Technical description

Frame version extruded aluminium intermediate profile with contact frame; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Methacrylate opal screen (diffused general light); screen set up for connecting several lengths by overlapping.

#### Installation

Recessed using the brackets on the profile; the mechanical systems for connecting the modules are included in the package.

#### Colour

White (01)

#### Weight (Kg)

8.6

#### Mounting

ceiling recessed

#### Wiring

Set up to house the LED modules required by the system.

#### Notes

Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

TPb rated. TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations



IP20



#### Product code

Q412.12: Plate - General Down Light - Warm LED - L 1196 - 3000K - CRI 80 - Aluminium **Attention! Code no longer in production**

#### Technical description

LED module set up for housing in initial or intermediate system profiles - down emission. Electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm LED.

#### Installation

Module insertion on profiles facilitated by a quick coupling system.

#### Colour

Indeterminate (00) | White (01)

#### Weight (Kg)

1.37

#### Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations




IP20



#### Technical data

Im system:	11254	CRI (minimum):	80
W system:	115.8	Colour temperature [K]:	3000
Im source:	16800	MacAdam Step:	3
W source:	106	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	97.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	67	Number of optical assemblies:	1

# Polar

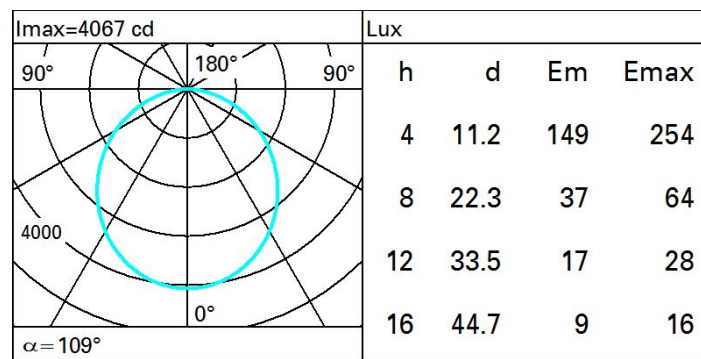

# Isolux

