


Last information update: November 2024

Product configuration: Q370+Q418.12

Q370: Minimal initial moduleGeneral Up/Down LightL 3594

Q418.12: Plate - General Up / Down Light - ON-OFF - Warm LED - L 1196 - 51.6W 5134lm - 3000K - Aluminium



Product code

Q370: Minimal initial moduleGeneral Up/Down LightL 3594

Technical description

Initial profile in extruded aluminium - Minimal (frameless) version for flush with ceiling mounting and up-down emission; methacrylate opal lower screen (diffused general light); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

Installation

Installation can be pendant-mounted using suitable accessories to be ordered separately. The initial modules can be used individually for various applications if completed with accessory caps and the required LED module.

Colour

White (01) | Aluminium (12)

Weight (Kg)

8.5

Mounting

wall surface|ceiling pendant

Wiring

Set up to house the up-down LED modules required by the system.

Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



Product code

Q418.12: Plate - General Up / Down Light - ON-OFF - Warm LED - L 1196 - 51.6W 5134lm - 3000K - Aluminium **Attention! Code no longer in production**

Technical description

LED module set up for housing in initial or intermediate system profiles - up + down emission. Electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm LED.

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Indeterminate (00) | White (01)

Weight (Kg)

1.4

Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	16410	CRI (minimum):	80
W system:	182.7	Colour temperature [K]:	3000
lm source:	25250	MacAdam Step:	3
W source:	160	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	89.8	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	4862	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	65	Number of optical assemblies:	1

Polar

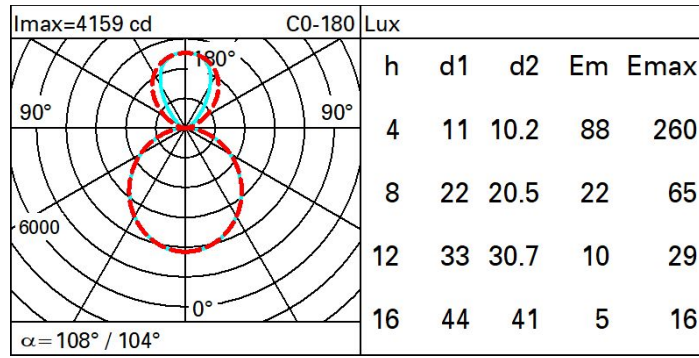

Isolux

