

Last information update: December 2024

### Product configuration: Q408+R411.01

Q408: Plate - General Down Light - Neutral LED - DALI - L 896

R411.01: Frame continuous line module - General Down Light - L 898 - TP(a) - White



#### Product code

Q408: Plate - General Down Light - Neutral LED - DALI - L 896

#### Technical description

LED module set up for housing in initial or intermediate system profiles - down emission. DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Neutral LED.

#### Installation

Module insertion on profiles facilitated by a quick coupling system.

#### Colour

Indeterminate (00)

#### Weight (Kg)

1.2

#### Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations



#### Product code

R411.01: Frame continuous line module - General Down Light - L 898 - TP(a) - White

#### Technical description

Frame version extruded aluminium intermediate profile with contact frame; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Methacrylate opal screen (diffused general light) in compliance with the TP(a) standard; screen set up for connecting several lengths by overlapping.

#### Installation

Recessed using the brackets on the profile; the mechanical systems for connecting the modules are included in the package.

#### Colour

White (01)\*

#### Weight (Kg)

1.9

\* Colours on request

#### Mounting

ceiling recessed


#### Wiring

Set up to house the LED modules required by the system.

#### Notes

Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.


Complies with EN60598-1 and pertinent regulations



#### Technical data

Im system:	2511	Colour temperature [K]:	4000
W system:	25.3	MacAdam Step:	3
Im source:	4050	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	22	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	99.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	62	Number of optical assemblies:	1
CRI (minimum):	80	Control:	DALI-2

# Polar

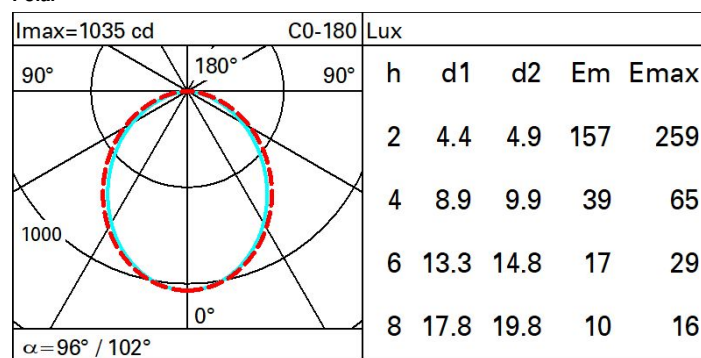

# Isolux

