

Last information update: December 2024

Product configuration: Q417+Q370.01

Q417: Plate - General Up / Down Light - DALI - Neutral LED - L 1196

Q370.01: Minimal initial module - General Up/Down Light - L 3594 - White



Product code

Q417: Plate - General Up / Down Light - DALI - Neutral LED - L 1196

Technical description

LED module set up for housing in initial or intermediate system profiles - up + down emission. DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Neutral LED.

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Indeterminate (00)

Weight (Kg)

1.4

Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations



Product code

Q370.01: Minimal initial module - General Up/Down Light - L 3594 - White

Technical description

Initial profile in extruded aluminium - Minimal (frameless) version for flush with ceiling mounting and up-down emission; methacrylate opal lower screen (diffused general light); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

Installation

Installation can be pendant-mounted using suitable accessories to be ordered separately. The initial modules can be used individually for various applications if completed with accessory caps and the required LED module.

Colour

White (01)

Weight (Kg)

8.5

Mounting

wall surface|ceiling pendant

Wiring

Set up to house the up-down LED modules required by the system.

Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	17385	Colour temperature [K]:	4000
W system:	175.5	MacAdam Step:	3
Im source:	26750	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	160	Lamp code:	LED
Luminous efficiency (Im/W, real value):	99.1	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	5151	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	65	Control:	DALI-2
CRI (minimum):	80		

Polar

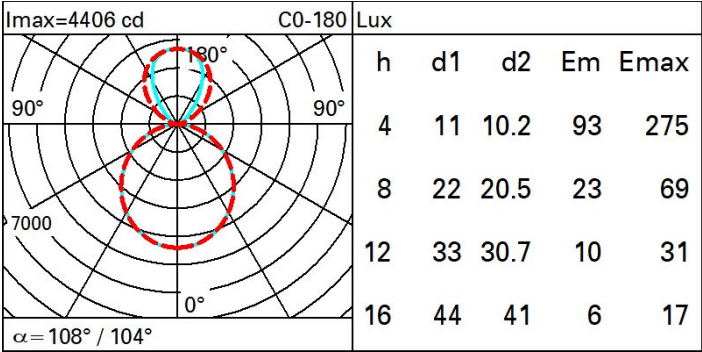

Isolux

