

Last information update: December 2024

Product configuration: Q417+Q371.01

Q417: Plate - General Up / Down Light - DALI - Neutral LED - L 1196

Q371.01: Minimal continuous line module - General Up/Down Light - L 3594 - White



Product code

Q417: Plate - General Up / Down Light - DALI - Neutral LED - L 1196

Technical description

LED module set up for housing in initial or intermediate system profiles - up + down emission. DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Neutral LED.

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Indeterminate (00)

Weight (Kg)

1.4

Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations



Product code

Q371.01: Minimal continuous line module - General Up/Down Light - L 3594 - White

Technical description

Extruded aluminium intermediate profile - Minimal (frameless) version for flush with ceiling mounting and up-down emission; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Methacrylate opal lower screen (diffused general light); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

Installation

Installation can be pendant-mounted using suitable accessories to be ordered separately; mechanical systems for connecting modules included in the package.

Colour

White (01)

Weight (Kg)

8.45

Mounting

wall surface

Wiring

Set up to house the up-down LED modules required by the system.

Notes

Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.


Complies with EN60598-1 and pertinent regulations



Technical data

| | | | |
|--|-------|---------------------------------------|---------------------------------|
| Im system: | 17385 | Colour temperature [K]: | 4000 |
| W system: | 175.5 | MacAdam Step: | 3 |
| Im source: | 26750 | Life Time LED 1: | > 50,000h - L80 - B10 (Ta 25°C) |
| W source: | 160 | Lamp code: | LED |
| Luminous efficiency (Im/W, real value): | 99.1 | Number of lamps for optical assembly: | 1 |
| Im in emergency mode: | - | ZVEI Code: | LED |
| Total light flux at or above an angle of 90° [Lm]: | 5151 | Number of optical assemblies: | 1 |
| Light Output Ratio (L.O.R.) [%]: | 65 | Control: | DALI-2 |
| CRI (minimum): | 80 | | |

Polar

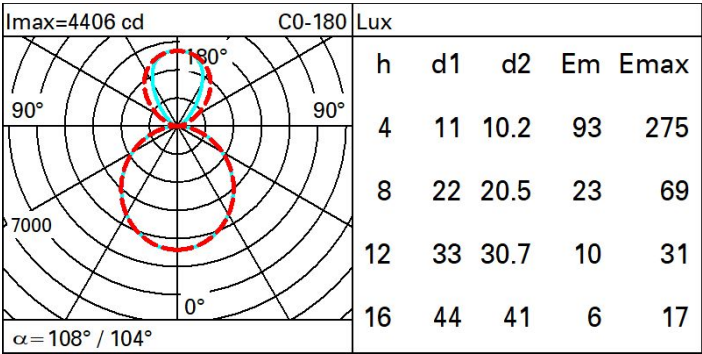

Isolux

