



Q466: Frame 2 cellules - Medium beam - LED



## Coefficients d'utilisation

R	77	75	73	71	55	53	33	00	DRR
K0.8	69	65	63	61	65	62	62	60	78
1.0	72	69	66	65	68	66	65	63	83
1.5	75	73	71	69	72	70	70	67	89
2.0	77	76	74	73	75	73	73	71	93
2.5	79	78	77	76	77	76	75	73	96
3.0	80	79	78	78	78	77	76	74	98
4.0	81	80	80	79	79	78	77	75	99
5.0	81	81	80	80	80	79	78	76	100

## Courbe limite de luminance

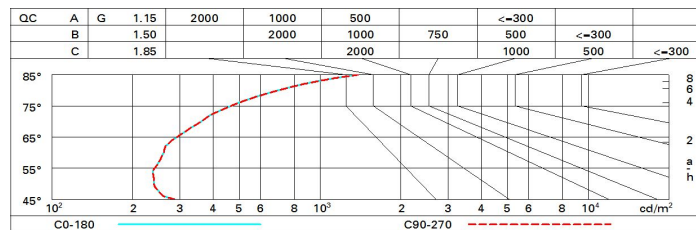

## Diagramme UGR

Corrected UGR values (at 380 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	4.3	6.4	4.7	6.7	7.1	4.3	6.4	4.7	6.7	7.1
	3H	4.2	5.8	4.5	6.1	6.4	4.2	5.7	4.5	6.1	6.4
	4H	4.1	5.5	4.5	5.8	6.1	4.1	5.4	4.5	5.7	6.1
	6H	4.1	5.2	4.5	5.5	5.8	4.1	5.1	4.4	5.4	5.8
	8H	4.1	5.2	4.5	5.5	5.9	4.0	5.0	4.4	5.4	5.7
	12H	4.2	5.2	4.6	5.5	5.9	4.0	5.0	4.4	5.3	5.7
4H	2H	4.1	5.4	4.5	5.7	6.1	4.1	5.5	4.5	5.8	6.1
	3H	4.0	5.0	4.4	5.4	5.7	4.0	5.0	4.4	5.4	5.8
	4H	3.9	4.9	4.3	5.3	5.7	3.9	4.9	4.3	5.3	5.7
	6H	3.6	5.3	4.1	5.8	6.2	3.6	5.3	4.0	5.7	6.2
	8H	3.6	5.5	4.1	5.9	6.4	3.4	5.3	3.9	5.8	6.3
	12H	3.6	5.6	4.1	6.0	6.6	3.3	5.3	3.9	5.8	6.3
8H	4H	3.4	5.3	3.9	5.8	6.3	3.6	5.5	4.1	5.9	6.4
	6H	3.5	5.2	4.0	5.7	6.3	3.5	5.3	4.1	5.8	6.3
	8H	3.6	5.1	4.1	5.6	6.2	3.6	5.1	4.1	5.6	6.2
	12H	4.0	4.9	4.5	5.4	6.0	3.8	4.8	4.3	5.3	5.8
12H	4H	3.3	5.3	3.9	5.8	6.3	3.6	5.6	4.1	6.0	6.6
	6H	3.5	5.0	4.0	5.5	6.1	3.7	5.3	4.2	5.8	6.3
	8H	3.8	4.8	4.3	5.3	5.8	4.0	4.9	4.5	5.4	6.0
Variations with the observer position at spacing:											
S =	1.0H	6.3 / -5.9					6.3 / -5.9				
	1.5H	9.0 / -6.0					9.0 / -6.0				
	2.0H	11.0 / -6.1					11.0 / -6.1				