

## Laser Blade XS



Design iGuzzini

iGuzzini

Last information update: June 2025

### Product configuration: Q469

Q469: Frame 2 cells - Flood beam - LED



### Product code

Q469: Frame 2 cells - Flood beam - LED

### Technical description

Linear miniaturised recessed luminaire with 2 optical elements for LED lamps - fixed optics. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Main body with die-cast zamak radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Ballast not included, available with separate code.

### Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 42.

### Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)\* | Grey / Black (74)\* | White / burnished chrome (E7)\*

### Weight (Kg)

0.11

\* Colours on request

### Mounting

wall recessed|ceiling recessed

### Wiring

Direct current ballasts to be ordered separately: ON-OFF - code no. MXF9 (min 1 / max 4); dimmable DALI - code no. BZM4 (min 1 / max 10) - check the instruction sheet for the lengths and compatible cross-sections of the cables to be used.

Complies with EN60598-1 and pertinent regulations



### Technical data

Im system:	288	CRI (minimum):	90
W system:	4	Colour temperature [K]:	2700
Im source:	360	MacAdam Step:	2
W source:	4	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	72	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	80	Number of optical assemblies:	1
Beam angle [°]:	42°	LED current [mA]:	700


### Polar

	<b>CIE</b> nL 0.80 100-100-100-100-80 UGR <10-<10 <b>DIN</b> A.61 <b>UTE</b> 0.80A+0.00T F*1=997 F*1+F*2=999 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<1500 cd/m² at 65° UGR<10   L<1500 cd/mq @65°			
	h	d	Em	Emax
	1	0.8	482	603
	2	1.5	120	151
	3	2.3	54	67
	4	3.1	30	38

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	69	66	64	68	66	65	63	78
1.0	75	72	70	68	71	69	69	66	83
1.5	79	77	75	73	76	74	73	71	89
2.0	82	80	78	77	79	77	76	74	93
2.5	83	82	81	80	81	80	79	77	96
3.0	84	83	82	82	82	81	80	78	98
4.0	85	84	84	83	83	83	81	79	99
5.0	86	85	85	84	84	83	82	80	100

# Luminance curve limit

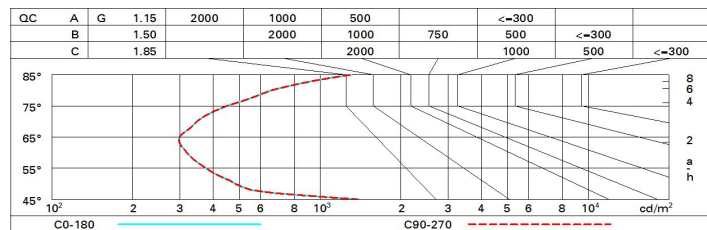

# UGR diagram

Corrected UGR values (at 300 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	7.9	8.4	8.2	8.6	8.9	7.9	8.4	8.2	8.6	8.9
	3H	7.8	8.2	8.1	8.5	8.8	7.8	8.2	8.1	8.5	8.8
	4H	7.7	8.1	8.1	8.4	8.7	7.7	8.1	8.0	8.4	8.7
	6H	7.7	8.0	8.0	8.4	8.7	7.6	8.0	8.0	8.3	8.6
	8H	7.6	8.0	8.0	8.3	8.7	7.6	8.0	8.0	8.3	8.6
	12H	7.6	8.0	8.0	8.3	8.7	7.6	7.9	7.9	8.2	8.6
4H	2H	7.7	8.1	8.0	8.4	8.7	7.7	8.1	8.1	8.4	8.7
	3H	7.6	7.9	7.9	8.3	8.6	7.6	7.9	8.0	8.3	8.6
	4H	7.5	7.8	7.9	8.2	8.6	7.5	7.8	7.9	8.2	8.6
	6H	7.4	7.7	7.9	8.1	8.5	7.4	7.7	7.8	8.1	8.5
	8H	7.4	7.7	7.9	8.1	8.5	7.4	7.6	7.8	8.0	8.5
	12H	7.4	7.6	7.9	8.1	8.5	7.3	7.6	7.8	8.0	8.4
8H	4H	7.4	7.6	7.8	8.0	8.5	7.4	7.7	7.9	8.1	8.5
	6H	7.3	7.5	7.8	8.0	8.5	7.4	7.6	7.8	8.0	8.5
	8H	7.3	7.5	7.8	8.0	8.5	7.3	7.5	7.8	8.0	8.5
	12H	7.3	7.5	7.9	8.0	8.5	7.3	7.4	7.8	7.9	8.4
12H	4H	7.3	7.6	7.8	8.0	8.4	7.4	7.6	7.9	8.1	8.5
	6H	7.3	7.5	7.8	7.9	8.4	7.4	7.5	7.9	8.0	8.5
	8H	7.3	7.4	7.8	7.9	8.4	7.3	7.5	7.9	8.0	8.5
Variations with the observer position at spacing:											
S =	1.0H	6.7 / -8.9					6.7 / -8.9				
	1.5H	9.5 / -9.1					9.5 / -9.1				
	2.0H	11.5 / -9.3					11.5 / -9.3				