

## Laser Blade XS

Design iGuzzini

iGuzzini

Last information update: May 2025

### Product configuration: Q894

Q894: Ceiling-mounted LB XS Linear GL Pro - 15 cells - remote driver



### Product code

Q894: Ceiling-mounted LB XS Linear GL Pro - 15 cells - remote driver

### Technical description

Ceiling-mounted luminaire with 15 optic elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Extruded aluminium main body and technical dissipation unit - shaped steel fixing plate. Ballast not included, available with separate code.

### Installation

Ceiling-mounted with surface fixing plate (screws and screw anchors not included) - external locking system.

### Colour

White (01) | Black/white (F2)

### Weight (Kg)

0.43


### Mounting

ceiling surface

### Wiring

Cables supplied with quick-coupling terminals for connecting to power supply line.

Complies with EN60598-1 and pertinent regulations



### Technical data

lm system:	1897	Colour temperature [K]:	3000
W system:	30	MacAdam Step:	2
lm source:	2750	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	30	Lamp code:	LED
Luminous efficiency (lm/W, real value):	63.2	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	69	LED current [mA]:	700
CRI (minimum):	90		


### Polar

	<b>CIE</b> nL 0.69 88-98-100-100-69 UGR 21.9-21.8 <b>DIN</b> A.61 <b>UTE</b> 0.69A+0.00T F*1=877 F*1+F*2=981 F*1+F*2+F*3=997			
	h	d	Em	Emax
	2	2	422	570
	4	4.1	106	142
	6	6.1	47	63
	8	8.2	26	36

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	58	54	51	49	54	51	51	48	69
1.0	62	58	55	53	57	55	54	52	75
1.5	66	63	61	59	62	60	60	57	83
2.0	69	66	65	63	65	64	63	61	88
2.5	70	68	67	66	67	66	65	63	92
3.0	71	70	69	68	69	68	67	65	94
4.0	72	71	70	70	70	69	68	66	96
5.0	73	72	71	71	71	70	69	67	97

# Luminance curve limit

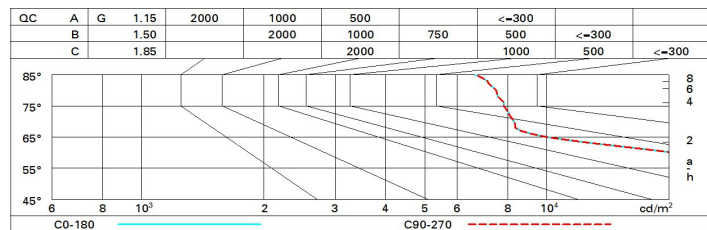

# UGR diagram

Corrected UGR values (at 2750 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	21.9	22.6	22.2	22.9	23.1	21.9	22.6	22.2	22.9	23.1
	3H	21.9	22.5	22.2	22.8	23.1	21.9	22.6	22.2	22.8	23.1
	4H	21.9	22.5	22.2	22.8	23.1	21.9	22.5	22.2	22.8	23.1
	6H	21.8	22.4	22.2	22.7	23.1	21.8	22.4	22.1	22.7	23.0
	8H	21.8	22.4	22.2	22.7	23.0	21.8	22.3	22.1	22.6	23.0
	12H	21.8	22.3	22.2	22.7	23.0	21.7	22.2	22.1	22.6	22.9
4H	2H	21.9	22.5	22.2	22.8	23.1	21.9	22.5	22.2	22.8	23.1
	3H	21.9	22.4	22.2	22.7	23.1	21.9	22.4	22.3	22.8	23.1
	4H	21.9	22.3	22.3	22.7	23.1	21.9	22.3	22.3	22.7	23.1
	6H	21.9	22.3	22.3	22.7	23.1	21.8	22.2	22.2	22.6	23.0
	8H	21.9	22.2	22.3	22.6	23.1	21.8	22.2	22.2	22.6	23.0
	12H	21.9	22.2	22.3	22.6	23.1	21.7	22.1	22.2	22.5	23.0
8H	4H	21.8	22.2	22.2	22.6	23.0	21.9	22.2	22.3	22.6	23.1
	6H	21.8	22.1	22.3	22.6	23.1	21.9	22.2	22.3	22.6	23.1
	8H	21.8	22.1	22.3	22.6	23.1	21.8	22.1	22.3	22.6	23.1
	12H	21.9	22.1	22.4	22.6	23.1	21.8	22.0	22.3	22.5	23.0
12H	4H	21.7	22.1	22.2	22.5	23.0	21.9	22.2	22.3	22.6	23.1
	6H	21.8	22.1	22.3	22.5	23.0	21.9	22.1	22.3	22.6	23.1
	8H	21.8	22.0	22.3	22.5	23.0	21.9	22.1	22.4	22.6	23.1
Variations with the observer position at spacing:											
S =	1.0H	2.4 / -2.2					2.4 / -2.2				
	1.5H	4.5 / -4.7					4.5 / -4.7				
	2.0H	6.3 / -6.0					6.3 / -6.0				