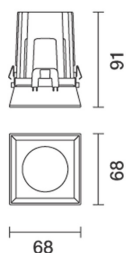



Last information update: October 2024

**Product configuration: QA79.10**

QA79.10: Fixed square recessed luminaire - Minimal - Wall Washer - Chrome

**Product code**

QA79.10: Fixed square recessed luminaire - Minimal - Wall Washer - Chrome

**Technical description**

Square Minimal recessed luminaire (frameless). Wall Washer fixed version: the optic system is designed to aim the light flow on a vertical surface with no shadow zones and a precise outline. The main body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. The optic unit includes two shaped metallized thermoplastic reflectors, a PMMA refractor/safety screen and a plastic anti-glare casing available in a range of painted and metallised finishes. Die-cast aluminium structure designed for flush with ceiling installation - a specific adapter with a separate code is available for false ceilings. This is indispensable for installing recessed luminaires. LED lamp with high color rendering index. Power unit available with a separate code no.

**Installation**

The luminaire is recessed in the adapter (QA83) by means of an anti-fall steel wire spring, previously installed on the ceiling that can be between 12.5 and 25 mm thick. A special steel spring required to extract the main body of the adapter after it has been installed is included in the package.

**Colour**

Chrome (10)\*

**Weight (Kg)**

0.24

\* Colours on request

**Mounting**

ceiling recessed

**Wiring**


Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	765	Colour temperature [K]:	3000
W system:	10	MacAdam Step:	2
Im source:	1320	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	10	Lamp code:	LED
Luminous efficiency (Im/W, real value):	76.5	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	58	LED current [mA]:	300
CRI (minimum):	90		

Polar

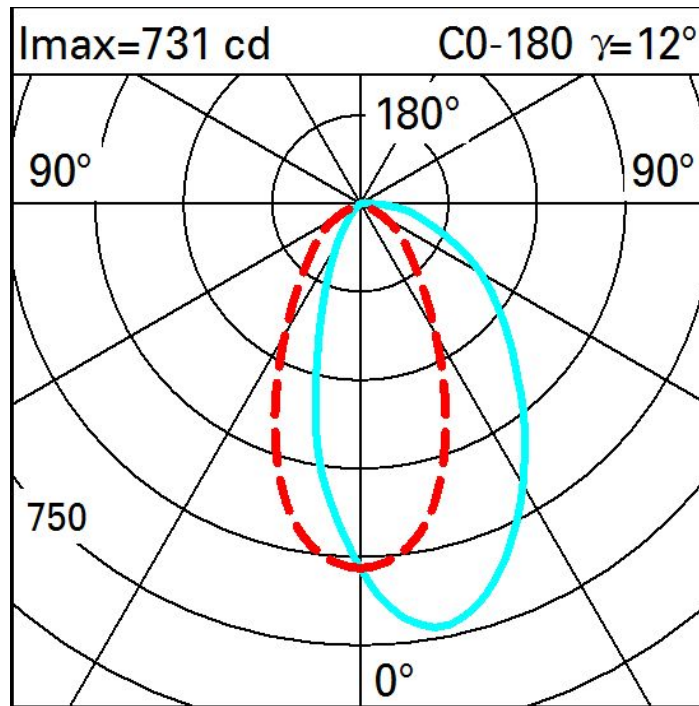

Illuminances

