

Last information update: November 2024

**Product configuration: QB75+QB99.12**

QB75: Module for continuous line Minimal DownUGR &lt; 19 / Office / WorkingL 3596

QB99.12: Down plate - ON-OFF - Working UGR &lt; 19 - LED Warm - L 3588 - 32W 3580lm - 3000K - Aluminium

**Product code**

QB75: Module for continuous line Minimal DownUGR &lt; 19 / Office / WorkingL 3596

**Technical description**

Extruded aluminium intermediate profile - Minimal (frameless) version for flush with ceiling mounting; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Microprismatic PMMA screen for controlled luminance emission UGR < 19 - 3000 cd/m2 (working lighting); screen set up for connecting several lengths by overlapping.

**Installation**

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately; the mechanical systems for connecting modules are included in the package.

**Colour**

White (01) | Black (04) | Aluminium (12)

**Weight (Kg)**

7

**Mounting**

ceiling recessed | ceiling surface | ceiling pendant

**Wiring**

Set up exclusively to house L 3588 triple-length LED modules.

**Notes**

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.  
TPb rated. TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations

**Product code**

QB99.12: Down plate - ON-OFF - Working UGR < 19 - LED Warm - L 3588 - 32W 3580lm - 3000K - Aluminium **Attention! Code no longer in production**

**Technical description**

LED module set up for housing in intermediate system profiles, ideal for particularly long light lines. High efficiency down emission for Working profiles (with a controlled luminance micro-prismatic screen). Electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm 3000K LED

**Installation**

Module insertion on profiles facilitated by a quick coupling system.

**Colour**

Indeterminate (00)

**Weight (Kg)**

3.8

**Wiring**

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated ON-OFF - non-dimmable control gear.

**Notes**


Important: the triple length intermediate luminous module can be used for both initial profiles - L 3594 - for stand-alone applications, and intermediate profiles - L 3594 - for continuous line applications.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	3692	CRI (minimum):	80
W system:	29.7	Colour temperature [K]:	3000
lm source:	5200	MacAdam Step:	3
W source:	27	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	124.3	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	71	Number of optical assemblies:	1


# Polar

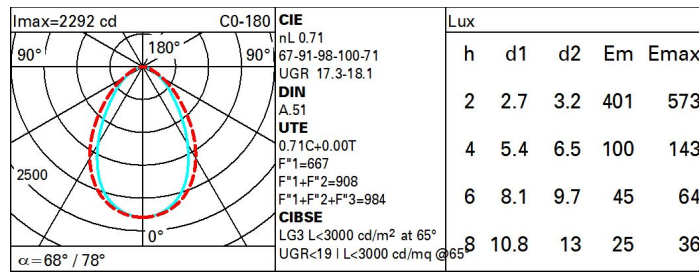

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	53	47	43	40	46	42	42	38	54
1.0	57	52	48	45	51	47	47	43	61
1.5	64	59	56	53	58	55	54	51	72
2.0	67	64	61	59	62	60	59	56	79
2.5	69	66	64	62	65	63	62	59	83
3.0	71	68	66	65	67	65	64	61	86
4.0	72	70	69	67	69	68	66	64	90
5.0	73	72	70	69	70	69	68	65	92

# Luminance curve limit

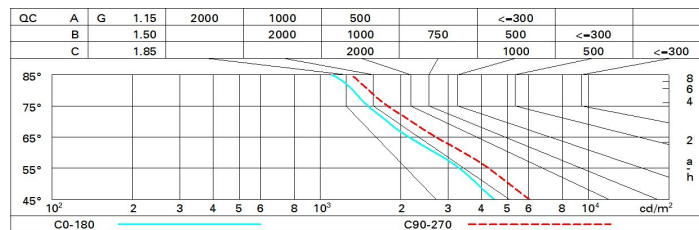

# UGR diagram

Corrected UGR values (at 5200 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	15.6	16.5	15.9	16.8	17.1	16.9	17.9	17.2	18.1	18.4	18.4
	3H	16.2	17.1	16.5	17.3	17.6	17.1	17.9	17.4	18.2	18.5	18.5
	4H	16.4	17.2	16.7	17.5	17.8	17.1	17.9	17.5	18.2	18.5	18.5
	6H	16.6	17.3	16.9	17.6	18.0	17.1	17.8	17.4	18.1	18.5	18.5
	8H	16.6	17.3	17.0	17.7	18.0	17.0	17.8	17.4	18.1	18.5	18.5
	12H	16.6	17.3	17.0	17.7	18.0	17.0	17.7	17.4	18.0	18.4	18.4
4H	2H	16.0	16.8	16.3	17.1	17.4	17.7	18.5	18.0	18.8	19.1	19.1
	3H	16.7	17.4	17.1	17.8	18.1	18.0	18.7	18.4	19.0	19.4	19.4
	4H	17.0	17.6	17.4	18.0	18.4	18.1	18.7	18.5	19.1	19.5	19.5
	6H	17.3	17.8	17.7	18.2	18.6	18.1	18.7	18.6	19.1	19.5	19.5
	8H	17.3	17.8	17.8	18.2	18.7	18.1	18.6	18.6	19.1	19.5	19.5
	12H	17.4	17.8	17.8	18.3	18.7	18.1	18.6	18.6	19.0	19.5	19.5
8H	4H	17.1	17.6	17.6	18.0	18.5	18.4	18.9	18.8	19.3	19.7	19.7
	6H	17.5	17.9	17.9	18.3	18.8	18.5	18.9	19.0	19.4	19.8	19.8
	8H	17.6	17.9	18.1	18.4	18.9	18.5	18.9	19.0	19.4	19.9	19.9
	12H	17.7	18.0	18.2	18.5	19.0	18.6	18.9	19.1	19.4	19.9	19.9
12H	4H	17.1	17.6	17.6	18.0	18.4	18.4	18.9	18.9	19.3	19.8	19.8
	6H	17.5	17.8	18.0	18.3	18.8	18.6	18.9	19.1	19.4	19.9	19.9
	8H	17.6	17.9	18.1	18.4	19.0	18.6	18.9	19.1	19.4	19.9	19.9
Variations with the observer position at spacing:												
S =		1.0H	0.5 / -0.5		0.3 / -0.5							
		1.5H	0.6 / -1.3		0.8 / -1.2							
		2.0H	1.2 / -1.9		1.8 / -1.8							