

Last information update: May 2025

#### Product configuration: QC01+QZ89.01

QC01: Down plate - DALI - Working UGR < 19 - LED Warm - L 896

QZ89.01: Module for continuous line - Minimal Down - UGR < 19 / Office / Working - L 898 - TP(a) - White

#### Product code

QC01: Down plate - DALI - Working UGR < 19 - LED Warm - L 896 **Attention! Code no longer in production**

#### Technical description

LED module set up for housing in initial or intermediate system profiles. High efficiency down emission for Working profiles (with a controlled luminance micro-prismatic screen). DALI dimmable control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm 3000K LED

#### Installation

Module insertion on profiles facilitated by a quick coupling system.

#### Colour

Indeterminate (00)

#### Weight (Kg)

0.99

#### Wiring

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated dimmable digital DALI control gear.

Complies with EN60598-1 and pertinent regulations



#### Product code

QZ89.01: Module for continuous line - Minimal Down - UGR < 19 / Office / Working - L 898 - TP(a) - White **Attention! Code no longer in production**

#### Technical description

Extruded aluminium intermediate profile - Minimal (frameless) version for flush with ceiling mounting; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Polycarbonate screen for controlled luminance emission UGR < 19 - 3000 cd/m<sup>2</sup> (working lighting) in compliance with the TP(a) standard; screen set up for overlapping connections of different lengths.

#### Installation

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately; the mechanical systems for connecting modules are included in the package.

#### Colour

White (01)

#### Weight (Kg)

1.66

#### Mounting

ceiling recessed|ceiling surface|ceiling pendant

#### Wiring

Set up to house the LED modules required by the system.

#### Notes


Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations




#### Technical data

lm system:	845	CRI (minimum):	80
W system:	6.8	Colour temperature [K]:	3000
lm source:	1300	MacAdam Step:	3
W source:	6.8	Lamp code:	LED
Luminous efficiency (lm/W, real value):	124.3	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	65	Control:	DALI-2




# Polar

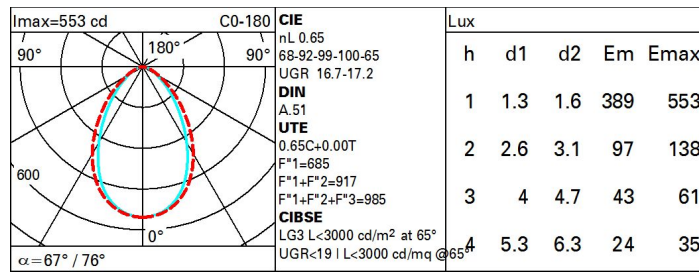

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	49	44	40	37	43	40	39	36	55
1.0	53	48	45	42	47	44	44	40	62
1.5	59	55	52	49	54	51	50	47	73
2.0	62	59	56	54	58	55	55	52	80
2.5	64	61	59	57	60	58	57	55	84
3.0	65	63	61	60	62	60	59	57	87
4.0	66	65	63	62	63	62	61	59	90
5.0	67	66	64	64	64	63	62	60	92

# Luminance curve limit

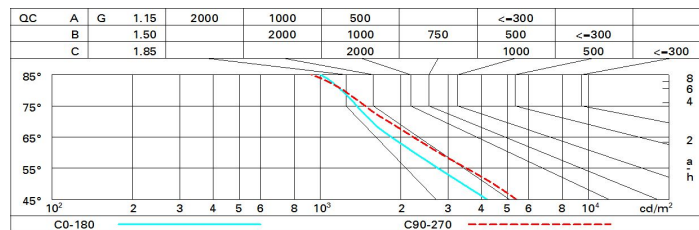

# UGR diagram

Corrected UGR values (at 1300 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	15.0	16.0	15.3	16.2	16.5	16.1	17.1	16.4	17.3	17.6
	3H	15.6	16.4	15.9	16.7	17.0	16.3	17.1	16.6	17.4	17.7
	4H	15.8	16.6	16.1	16.9	17.2	16.3	17.1	16.7	17.4	17.7
	6H	15.9	16.7	16.3	17.0	17.3	16.3	17.0	16.6	17.3	17.7
	8H	16.0	16.7	16.4	17.0	17.4	16.2	16.9	16.6	17.3	17.6
	12H	16.0	16.7	16.4	17.0	17.4	16.2	16.9	16.6	17.2	17.6
4H	2H	15.4	16.2	15.7	16.5	16.8	16.8	17.6	17.2	17.9	18.2
	3H	16.1	16.7	16.4	17.1	17.4	17.1	17.8	17.5	18.1	18.5
	4H	16.3	16.9	16.8	17.3	17.7	17.2	17.8	17.6	18.2	18.6
	6H	16.6	17.1	17.0	17.5	17.9	17.2	17.8	17.7	18.2	18.6
	8H	16.7	17.1	17.1	17.6	18.0	17.2	17.7	17.7	18.1	18.6
	12H	16.7	17.1	17.2	17.6	18.0	17.2	17.7	17.7	18.1	18.5
8H	4H	16.4	16.9	16.9	17.3	17.8	17.4	17.9	17.9	18.3	18.8
	6H	16.8	17.2	17.2	17.6	18.1	17.6	18.0	18.0	18.4	18.9
	8H	16.9	17.2	17.4	17.7	18.2	17.6	18.0	18.1	18.4	18.9
	12H	17.0	17.3	17.5	17.8	18.3	17.6	17.9	18.1	18.4	18.9
12H	4H	16.4	16.8	16.9	17.3	17.7	17.5	17.9	17.9	18.3	18.8
	6H	16.8	17.1	17.3	17.6	18.1	17.6	18.0	18.1	18.4	18.9
	8H	16.9	17.2	17.4	17.7	18.2	17.7	18.0	18.2	18.5	19.0
Variations with the observer position at spacing:											
S =		1.0H	0.5 / -0.6		0.3 / -0.6						
		1.5H	0.7 / -1.4		1.0 / -1.4						
		2.0H	1.6 / -1.9		2.1 / -2.0						