


Product configuration: QC33

QC33: Palco linear recess 3 x Ø51 - flood - remote driver



QC33: Palco linear recess 3 x Ø51 - flood - remote driver

Linear luminaire for recessed installation with 3 miniaturised adjustable spotlights. Spotlight bodies with a die-cast aluminium dissipation system - cast zamak rotation units - a linear recess structure consisting of an extruded aluminium internal profile, painted steel caps and stop plate - steel wire fixing springs. The spotlight swivel joints allow the spotlight to be rotated by 360° and tilted by 90°. The set back position of the optic units guarantees a high level of visual comfort with thermoplastic high definition lenses. Ballast not included, available with separate code.

Recessed linear base with surface stop plate - steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 00 x 000 mm. Option of installing next to linear versions so as to create a continuous line.

White (01) | Black (04)

11

wall recessed|ceiling recessed

Output cables for connecting to power supply line.

Technical and anti-glare accessories available.

Complies with EN60598-1 and pertinent regulations




Im system:	2443	CRI (minimum):	90
W system:	45	Colour temperature [K]:	2700
Im source:	1380	MacAdam Step:	2
W source:	15	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	54.3	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	59	Number of optical assemblies:	3
Beam angle [°]:	40° / 41°	LED current [mA]:	400

	Imax =1661 cd C0-180 CIE nL 0.59 97-100-100-100-59 UGR 17.2-17.4 DIN A.61 UTE 0.59A+0.00T F*1=969 F*1+F*2=998 F*1+F*2+F*3=1000 CBSE LG3 L<3000 cd/m ² at 6° UGR<19 L<3000 cd/mq @65°	Lux <table border="1"> <thead> <tr> <th>h</th> <th>d1</th> <th>d2</th> <th>Em</th> <th>Emax</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.7</td> <td>0.7</td> <td>1269</td> <td>1661</td> </tr> <tr> <td>2</td> <td>1.5</td> <td>1.5</td> <td>317</td> <td>415</td> </tr> <tr> <td>3</td> <td>2.2</td> <td>2.2</td> <td>141</td> <td>185</td> </tr> <tr> <td>4</td> <td>2.9</td> <td>2.9</td> <td>79</td> <td>104</td> </tr> </tbody> </table>	h	d1	d2	Em	Emax	1	0.7	0.7	1269	1661	2	1.5	1.5	317	415	3	2.2	2.2	141	185	4	2.9	2.9	79	104
	h	d1	d2	Em	Emax																						
	1	0.7	0.7	1269	1661																						
	2	1.5	1.5	317	415																						
	3	2.2	2.2	141	185																						
4	2.9	2.9	79	104																							
α =40°																											

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	53	50	48	46	49	47	47	45	76
1.0	55	52	50	49	52	50	50	48	81
1.5	58	56	54	53	55	54	53	52	87
2.0	60	58	57	56	58	57	56	54	92
2.5	61	60	59	58	59	58	58	56	95
3.0	62	61	60	60	60	59	59	57	97
4.0	62	62	62	61	61	61	60	58	99
5.0	63	62	62	62	61	61	60	59	100

Luminance curve limit

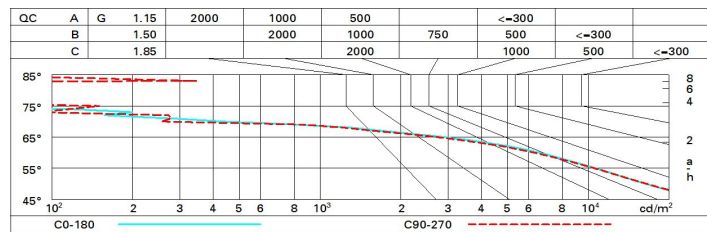

UGR diagram

Corrected UGR values (at 1380 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	17.8	18.4	18.1	18.6	18.9	17.9	18.6	18.2	18.8	19.1
	3H	17.7	18.2	18.0	18.5	18.8	17.8	18.4	18.2	18.7	19.0
	4H	17.6	18.1	17.9	18.4	18.7	17.8	18.3	18.1	18.6	18.9
	6H	17.5	18.0	17.9	18.3	18.6	17.7	18.2	18.0	18.5	18.8
	8H	17.5	17.9	17.8	18.3	18.6	17.7	18.1	18.0	18.4	18.8
	12H	17.4	17.9	17.8	18.2	18.6	17.6	18.1	18.0	18.4	18.8
4H	2H	17.6	18.1	17.9	18.4	18.7	17.7	18.3	18.1	18.6	18.9
	3H	17.5	17.9	17.8	18.2	18.6	17.6	18.1	18.0	18.4	18.8
	4H	17.4	17.8	17.8	18.1	18.5	17.5	17.9	17.9	18.3	18.7
	6H	17.3	17.6	17.7	18.0	18.4	17.4	17.8	17.9	18.2	18.6
	8H	17.2	17.6	17.7	18.0	18.4	17.4	17.7	17.8	18.1	18.6
	12H	17.2	17.5	17.6	17.9	18.4	17.3	17.6	17.8	18.1	18.5
8H	4H	17.2	17.6	17.7	18.0	18.4	17.4	17.7	17.8	18.1	18.6
	6H	17.1	17.4	17.6	17.8	18.3	17.3	17.6	17.8	18.0	18.5
	8H	17.1	17.3	17.6	17.8	18.3	17.3	17.5	17.7	17.9	18.4
	12H	17.0	17.2	17.5	17.7	18.2	17.2	17.4	17.7	17.9	18.4
12H	4H	17.2	17.5	17.6	17.9	18.4	17.3	17.6	17.8	18.1	18.5
	6H	17.1	17.3	17.6	17.8	18.3	17.3	17.5	17.7	17.9	18.4
	8H	17.0	17.2	17.5	17.7	18.2	17.2	17.4	17.7	17.9	18.4
Variations with the observer position at spacing:											
S =	1.0H	4.9 / -7.9					4.9 / -8.1				
	1.5H	7.7 / -11.8					7.6 / -12.3				
	2.0H	9.7 / -20.3					9.6 / -20.5				