


Last information update: March 2025

Product configuration: QF66.39

QF66.39: Ø 163 mm - warm white - INVERTER - White/Aluminium

**Product code**

QF66.39: Ø 163 mm - warm white - INVERTER - White/Aluminium

Technical description

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3000K). General lighting beam. Luminaire complete with inverter for safety light.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.13

Mounting

ceiling surface

Wiring

product complete with INVERTER for safety light.

Complies with EN60598-1 and pertinent regulations




IP20


IP54

On the visible part of
the product once installed

pending

**Technical data**


lm system:	2655	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	28.6	Lamp code:	LED
lm source:	2950	Number of lamps for optical assembly:	1
W source:	21	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	92.8	Number of optical assemblies:	1
lm in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	19.4 A / 250 µs
Light Output Ratio (L.O.R.) [%]:	90	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 13 luminaires B16A: 21 luminaires C10A: 21 luminaires C16A: 35 luminaires
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000	Control:	On/off
MacAdam Step:	2		

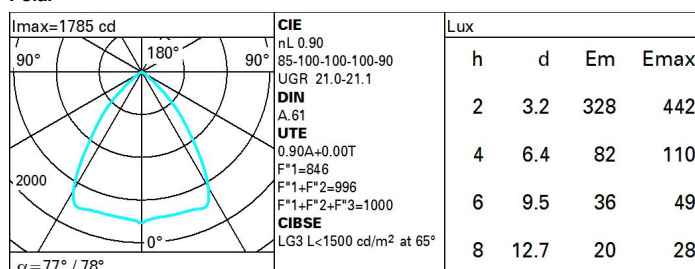Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	69	65	62	68	64	64	60	67
1.0	80	74	71	68	73	70	70	66	73
1.5	86	82	79	76	81	78	77	74	82
2.0	89	86	84	82	85	83	82	79	88
2.5	91	89	87	86	88	86	85	82	91
3.0	93	91	89	88	89	88	87	84	93
4.0	94	92	91	90	91	90	89	86	95
5.0	95	94	92	92	92	91	90	87	97

Luminance curve limit

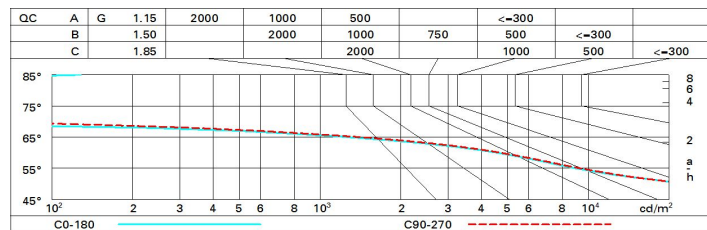

UGR diagram

Corrected UGR values (at 2950 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	21.5	22.3	21.8	22.5	22.8	21.6	22.4	21.9	22.6	22.9
	3H	21.4	22.1	21.7	22.3	22.6	21.5	22.2	21.8	22.5	22.8
	4H	21.3	22.0	21.7	22.2	22.6	21.4	22.1	21.8	22.4	22.7
	6H	21.2	21.8	21.6	22.1	22.5	21.4	21.9	21.7	22.3	22.6
	8H	21.2	21.8	21.6	22.1	22.4	21.3	21.9	21.7	22.2	22.5
	12H	21.2	21.7	21.5	22.0	22.4	21.3	21.8	21.7	22.2	22.5
4H	2H	21.3	22.0	21.7	22.3	22.6	21.4	22.0	21.8	22.3	22.6
	3H	21.2	21.7	21.6	22.1	22.4	21.3	21.8	21.7	22.2	22.5
	4H	21.1	21.6	21.5	21.9	22.3	21.2	21.7	21.6	22.0	22.4
	6H	21.0	21.4	21.4	21.8	22.2	21.1	21.5	21.5	21.9	22.3
	8H	21.0	21.3	21.4	21.8	22.2	21.1	21.4	21.5	21.9	22.3
	12H	20.9	21.3	21.4	21.7	22.1	21.0	21.4	21.5	21.8	22.2
8H	4H	21.0	21.3	21.4	21.8	22.2	21.1	21.4	21.5	21.9	22.3
	6H	20.9	21.2	21.4	21.6	22.1	21.0	21.3	21.4	21.7	22.2
	8H	20.8	21.1	21.3	21.6	22.1	20.9	21.2	21.4	21.7	22.2
	12H	20.8	21.0	21.3	21.5	22.0	20.9	21.1	21.4	21.6	22.1
12H	4H	20.9	21.3	21.4	21.7	22.1	21.0	21.4	21.5	21.8	22.2
	6H	20.8	21.1	21.3	21.6	22.1	20.9	21.2	21.4	21.7	22.2
	8H	20.8	21.0	21.3	21.5	22.0	20.9	21.1	21.4	21.6	22.1
Variations with the observer position at spacing:											
S =		1.0H					2.5 / -8.2				
		1.5H					5.0 / -14.9				
		2.0H					7.0 / -28.7				