



Last information update: April 2025

### Product configuration: QG40

QG40: Ø 225 mm - warm white - DALI



### Product code

QG40: Ø 225 mm - warm white - DALI

### Technical description

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3000K). Wall-washer light emission.

### Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

### Colour

White / Aluminium (39)

### Weight (Kg)

1.03


### Mounting

ceiling surface

### Wiring

product complete with DALI components


Complies with EN60598-1 and pertinent regulations

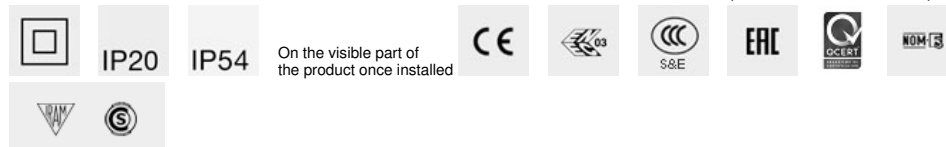

### Technical data

Im system:	4192	Colour temperature [K]:	3000
W system:	36.7	MacAdam Step:	2
Im source:	5050	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	32	Lamp code:	LED
Luminous efficiency (Im/W, real value):	114.2	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	83	Control:	DALI-2
CRI (minimum):	80		

Polar

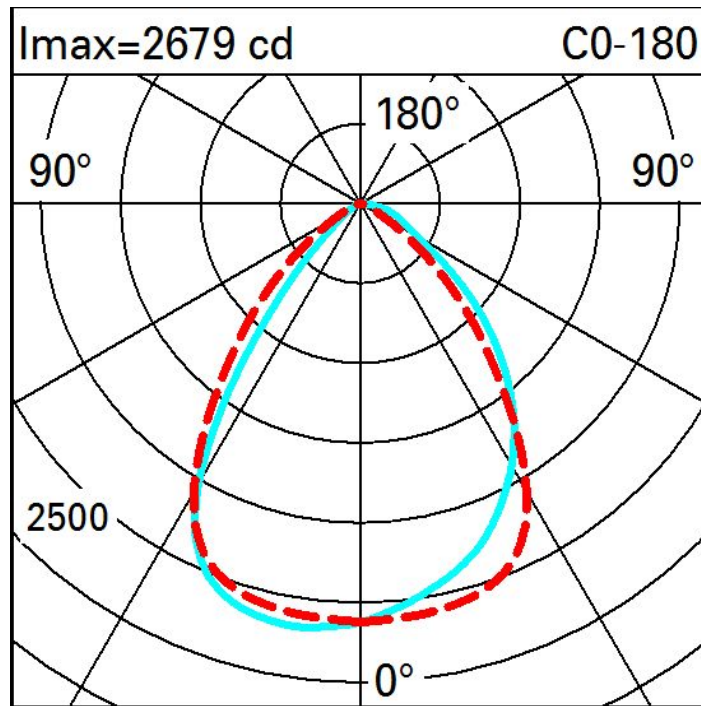

Illuminances

Lux													Wall distance = 1m	
3														
	2	4	12	39	136	224	136	39	12	4	2			
2	3	8	26	96	268	402	268	96	26	8	3			
	6	18	55	136	246	308	246	136	55	18	6			
1	13	29	62	113	167	192	167	113	62	29	13			
	17	33	56	83	107	118	107	83	56	33	17			
0														
	m	-2	-1	0	1	2	3							