


Last information update: April 2025

Product configuration: QG53

QG53: small body - Neutral White - DALI - wide flood optic

**Product code**

QG53: small body - Neutral White - DALI - wide flood optic

Technical description

Adjustable spotlight with adapter for installation on mains electrified track for high output LED lamp with monochrome emission in a Neutral White (4000K) tone. DALI ballast integrated in the product. Luminaire made of die-cast aluminium and thermoplastic material, allows 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. The luminaire has mechanical aiming locks for both movements, operated using the same tool on two screws, one at the side of the rod and one on the adapter for the track. Passive heat dissipation. Spotlight can hold up to two flat accessories at the same time. Another external component can also be applied, selected from directional flaps and an anti-glare screen. All external accessories rotate 360° about the spotlight longitudinal axis.

Installation

On an electrified track with a special base

Colour

White (01) | Black (04)

Weight (Kg)

1.28

Mounting

three circuit track

Wiring

DALI components housed in the luminaire

Sistemi di controllo compatibili:Quick BLE [↗](#)Quick DALI - Touch display 7" [↗](#)Quick DALI LMS Quick [↗](#)Master Pro Evo KNX [↗](#)

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	2036	CRI (minimum):	97
W system:	28.5	Colour temperature [K]:	4000
lm source:	2700	MacAdam Step:	2
W source:	26	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	71.4	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	75	Number of optical assemblies:	1
Beam angle [°]:	46°	Control:	DALI-2


Polar

<p>$I_{max}=3878\text{ cd}$</p> <p>$\alpha = 45^\circ$</p>	CIE nL 0.75 99-100-100-100-75 UGR <10-<10				Lux			
	DIN A.61				h			
	UTE 0.75A+0.00T				d			
	F*1=999				Em			
	F*1+F*2=999				Emax			
F*1+F*2+F*3=1000				2				
CIBSE LG3 L<1500 cd/m ² at 65°				1.7				
UGR<10 L<1500 cd/mq @65°				776				
				3.3				
				194				
				228				
				6				
				5				
				86				
				102				
				8				
				6.7				
				49				
				57				

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	64	62	60	64	61	61	59	78
1.0	71	68	65	64	67	65	65	62	82
1.5	74	72	70	69	71	69	69	67	88
2.0	77	75	74	72	74	73	72	70	93
2.5	78	77	76	75	76	75	74	72	95
3.0	79	78	77	77	77	76	75	74	97
4.0	80	79	79	78	78	78	77	75	99
5.0	81	80	80	79	79	78	77	75	100

Luminance curve limit

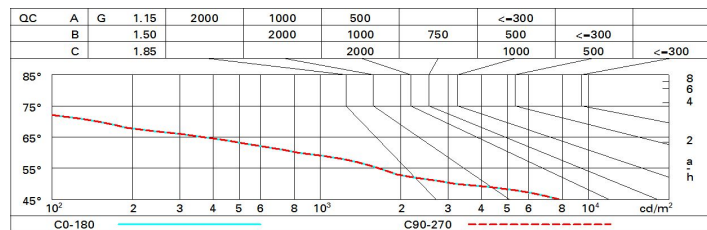

UGR diagram

Corrected UGR values (at 2700 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	8.9	9.4	9.1	9.7	9.9	8.9	9.4	9.1	9.7	9.9
	3H	8.7	9.3	9.0	9.5	9.8	8.7	9.3	9.0	9.5	9.8
	4H	8.7	9.1	9.0	9.4	9.7	8.7	9.2	9.0	9.4	9.7
	6H	8.6	9.0	8.9	9.3	9.7	8.6	9.0	8.9	9.4	9.7
	8H	8.5	9.0	8.9	9.3	9.6	8.6	9.0	8.9	9.3	9.6
	12H	8.5	8.9	8.9	9.3	9.6	8.5	8.9	8.9	9.3	9.6
4H	2H	8.7	9.2	9.0	9.4	9.7	8.7	9.1	9.0	9.4	9.7
	3H	8.5	8.9	8.9	9.3	9.6	8.5	8.9	8.9	9.3	9.6
	4H	8.4	8.8	8.8	9.2	9.5	8.4	8.8	8.8	9.2	9.5
	6H	8.3	8.7	8.8	9.1	9.5	8.3	8.7	8.8	9.1	9.5
	8H	8.3	8.6	8.7	9.0	9.4	8.3	8.6	8.7	9.0	9.4
	12H	8.2	8.5	8.7	8.9	9.4	8.2	8.5	8.7	8.9	9.4
8H	4H	8.3	8.6	8.7	9.0	9.4	8.3	8.6	8.7	9.0	9.4
	6H	8.2	8.4	8.7	8.9	9.4	8.2	8.4	8.7	8.9	9.4
	8H	8.1	8.4	8.6	8.8	9.3	8.1	8.4	8.6	8.8	9.3
	12H	8.1	8.3	8.6	8.8	9.3	8.1	8.3	8.6	8.8	9.3
12H	4H	8.2	8.5	8.7	8.9	9.4	8.2	8.5	8.7	8.9	9.4
	6H	8.1	8.4	8.6	8.8	9.3	8.1	8.4	8.6	8.8	9.3
	8H	8.1	8.3	8.6	8.8	9.3	8.1	8.3	8.6	8.8	9.3
Variations with the observer position at spacing:											
S =	1.0H	5.1 / -10.3					5.1 / -10.3				
	1.5H	7.8 / -15.6					7.8 / -15.6				
	2.0H	9.8 / -20.9					9.8 / -20.9				