


Last information update: May 2025

Product configuration: QM73.Y

QM73.Y: Minimal fixed recessed luminaire Ø 125 mm - Wide Flood beam - UGR < 19 - DALI

**Product code**QM73.Y: Minimal fixed recessed luminaire Ø 125 mm - Wide Flood beam - UGR < 19 - DALI **Attention! Code no longer in production****Technical description**

Fixed round recessed luminaire for C.o.B. LED lamp. UGR<19 controlled luminance light emission. Version without rim for mounting flush with ceiling. Die-cast aluminium recessed structure for installation in a specific adapter with a separate code is available for false ceilings. This is indispensable for installing recessed luminaires. Reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer and anti-fall retaining system. DALI dimmable control gear unit included.

Installation

The luminaire is recessed in the adapter (PA55) by means of a steel wire spring, previously installed on the ceiling. A spring lock / unlock system simplifies installation and eventual maintenance operations.

Colour

Aluminium (12)

Mounting

ceiling recessed

Wiring

Power line connections can be made on control gear terminal board included.

Notes

TPb rated

Complies with EN60598-1 and pertinent regulations




IP20

IP43

On the visible part of the product once installed

**Technical data**


lm system:	2590	CRI (minimum):	90
W system:	32	Colour temperature [K]:	2700
lm source:	3200	MacAdam Step:	2
W source:	29	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	81	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	64°	Control:	DALI-2

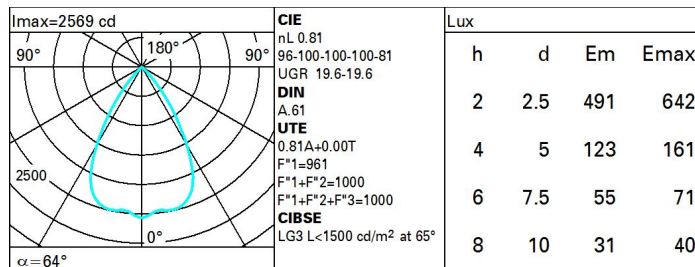Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	65	63	67	64	64	61	76
1.0	75	72	69	67	71	68	68	65	81
1.5	79	77	74	73	76	74	73	70	87
2.0	82	80	78	77	79	77	77	74	92
2.5	84	82	81	80	81	80	79	77	95
3.0	85	84	83	82	82	81	80	78	97
4.0	86	85	84	84	83	83	82	80	98
5.0	86	86	85	85	84	84	82	80	99

Luminance curve limit

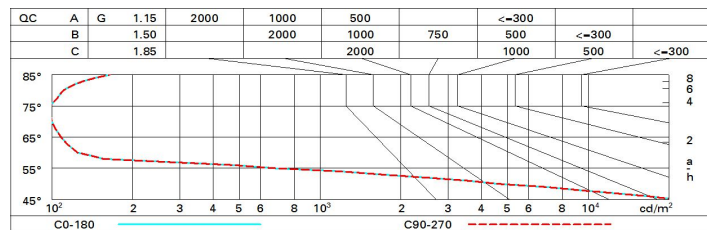

UGR diagram

Corrected UGR values (at 3200 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	20.2	20.8	20.5	21.1	21.3	20.2	20.8	20.5	21.1	21.3
	3H	20.1	20.6	20.4	20.9	21.2	20.1	20.6	20.4	20.9	21.2
	4H	20.0	20.5	20.4	20.8	21.1	20.0	20.5	20.4	20.8	21.1
	6H	19.9	20.4	20.3	20.7	21.0	19.9	20.4	20.3	20.7	21.0
	8H	19.9	20.3	20.3	20.7	21.0	19.9	20.3	20.3	20.7	21.0
	12H	19.9	20.3	20.2	20.6	21.0	19.9	20.3	20.2	20.6	21.0
4H	2H	20.0	20.5	20.4	20.8	21.1	20.0	20.5	20.4	20.8	21.1
	3H	19.9	20.3	20.2	20.6	21.0	19.9	20.3	20.2	20.6	21.0
	4H	19.8	20.1	20.2	20.5	20.9	19.8	20.1	20.2	20.5	20.9
	6H	19.7	20.0	20.1	20.4	20.8	19.7	20.0	20.1	20.4	20.8
	8H	19.6	19.9	20.1	20.4	20.8	19.6	19.9	20.1	20.4	20.8
	12H	19.6	19.9	20.0	20.3	20.7	19.6	19.9	20.0	20.3	20.7
8H	4H	19.6	19.9	20.1	20.4	20.8	19.6	19.9	20.1	20.4	20.8
	6H	19.5	19.8	20.0	20.2	20.7	19.5	19.8	20.0	20.2	20.7
	8H	19.5	19.7	20.0	20.2	20.7	19.5	19.7	20.0	20.2	20.7
	12H	19.4	19.6	19.9	20.1	20.6	19.4	19.6	19.9	20.1	20.6
12H	4H	19.6	19.9	20.0	20.3	20.7	19.6	19.9	20.0	20.3	20.7
	6H	19.5	19.7	20.0	20.2	20.7	19.5	19.7	20.0	20.2	20.7
	8H	19.4	19.6	19.9	20.1	20.6	19.4	19.6	19.9	20.1	20.6
Variations with the observer position at spacing:											
S =	1.0H	4.7 / -26.2					4.7 / -26.2				
	1.5H	7.5 / -31.2					7.5 / -31.2				
	2.0H	9.5 / -31.4					9.5 / -31.4				