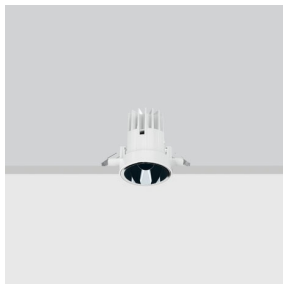


Last information update: May 2025

**Product configuration: QP61**

QP61: Fixed circular recessed luminaire - Ø 78 mm - warm white - flood optic - UGR&lt;19

**Product code**

QP61: Fixed circular recessed luminaire - Ø 78 mm - warm white - flood optic - UGR&lt;19

**Technical description**

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version without rim for mounting flush with ceiling. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in neutral warm colour tone (2,700K). General light emission, with controlled luminance UGR<19 1500 cd/m<sup>2</sup> α>65° flood optic.

**Installation**

Installation flush with the ceiling is for false ceilings 12.5 mm thick

**Colour**

Aluminium (12)

**Weight (Kg)**

0.42

**Mounting**

ceiling recessed

**Wiring**

product complete with TRIAC components


Complies with EN60598-1 and pertinent regulations



IP20

IP43

On the visible part of the product once installed

**Technical data**

lm system:	856	CRI (minimum):	90
W system:	10.7	Colour temperature [K]:	2700
lm source:	1100	MacAdam Step:	2
W source:	8.4	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	80	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	78	Number of optical assemblies:	1
Beam angle [°]:	28°	Control:	TRIAC


**Polar**

lmax=2535 cd		<b>CIE</b> nL 0.78 100-100-100-100-78 UGR 11.4-11.4 <b>DIN</b> A.61 <b>UTE</b> 0.78A+0.00T F*1=996 F*1+F*2=1000 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<1500 cd/m² at 65° UGR<16   L<1500 cd/mq @65°	<b>Lux</b>				
90°	180°		h	d	Em	Emax	
			2	1	510	634	
			4	2	128	158	
			6	3	57	70	
			8	4	32	40	
α=28°							

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	67	64	62	66	64	63	61	78
1.0	73	70	68	66	69	67	67	64	83
1.5	77	75	73	71	74	72	71	69	89
2.0	79	78	76	75	76	75	74	72	93
2.5	81	79	78	78	78	77	77	74	96
3.0	82	81	80	79	80	79	78	76	98
4.0	83	82	82	81	81	80	79	77	99
5.0	83	83	82	82	81	81	80	78	100

# Luminance curve limit

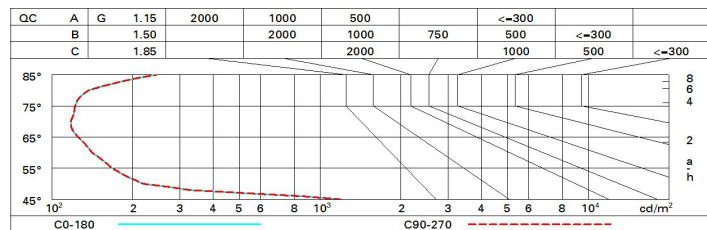

# UGR diagram

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	12.3	14.3	12.7	14.6	14.9	12.3	14.3	12.7	14.6	14.9
	3H	12.1	13.7	12.5	14.0	14.4	12.1	13.7	12.5	14.0	14.4
	4H	12.1	13.5	12.4	13.8	14.1	12.1	13.5	12.4	13.8	14.1
	6H	12.0	13.2	12.4	13.6	13.9	12.0	13.2	12.4	13.6	13.9
	8H	11.9	13.1	12.3	13.5	13.9	11.9	13.1	12.3	13.5	13.9
	12H	11.9	13.1	12.3	13.4	13.8	11.9	13.1	12.3	13.4	13.8
4H	2H	12.1	13.5	12.4	13.8	14.1	12.1	13.5	12.4	13.8	14.1
	3H	11.9	13.1	12.3	13.4	13.8	11.9	13.1	12.3	13.4	13.8
	4H	11.8	12.9	12.2	13.2	13.7	11.8	12.9	12.2	13.2	13.7
	6H	11.5	13.0	12.0	13.5	13.9	11.5	13.0	12.0	13.5	13.9
	8H	11.4	13.1	11.9	13.5	14.0	11.4	13.1	11.9	13.5	14.0
	12H	11.2	13.1	11.7	13.6	14.1	11.2	13.1	11.7	13.6	14.1
8H	4H	11.4	13.1	11.9	13.5	14.0	11.4	13.1	11.9	13.5	14.0
	6H	11.2	12.9	11.7	13.4	13.9	11.2	12.9	11.7	13.4	13.9
	8H	11.2	12.7	11.7	13.2	13.8	11.2	12.7	11.7	13.2	13.8
	12H	11.4	12.3	11.9	12.8	13.3	11.4	12.3	11.9	12.8	13.3
12H	4H	11.2	13.1	11.7	13.6	14.1	11.2	13.1	11.7	13.6	14.1
	6H	11.2	12.7	11.7	13.2	13.8	11.2	12.7	11.7	13.2	13.8
	8H	11.4	12.3	11.9	12.8	13.3	11.4	12.3	11.9	12.8	13.3
Variations with the observer position at spacing:											
S =	1.0H	6.3 / -21.8					6.3 / -21.8				
	1.5H	9.1 / -22.1					9.1 / -22.1				
	2.0H	11.1 / -22.3					11.1 / -22.3				