
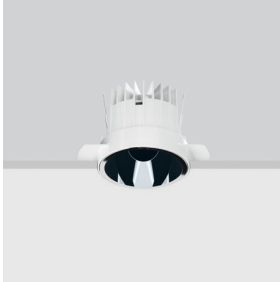


Last information update: May 2025

Product configuration: QQ20

QQ20: Fixed circular recessed luminaire - Ø133 mm - warm white - wide flood optic - UGR<19

**Product code**

QQ20: Fixed circular recessed luminaire - Ø133 mm - warm white - wide flood optic - UGR<19

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version without rim for mounting flush with ceiling. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in warm white colour tone (3,000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° wide flood optic.

Installation

Installation flush with the ceiling is for false ceilings 12.5 mm thick

Colour

Aluminium (12)

Weight (Kg)

1.08


Mounting

ceiling recessed

Wiring

product complete with TRIAC components

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	2833	CRI (minimum):	80
W system:	27.5	Colour temperature [K]:	3000
lm source:	3500	MacAdam Step:	2
W source:	25	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	103	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	64°	Control:	TRIAC


Polar

	CIE nL 0.81 96-100-100-100-81 UGR 20.0-20.0 DIN A.61 UTE 0.81A+0.00T F*1=961 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m ² at 65°			
	Lux			
	h	d	Em	Emax
	2	2.5	537	702
	4	5	134	176
	6	7.5	60	78
	8	10	34	44

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	65	63	67	64	64	61	76
1.0	75	72	69	67	71	68	68	65	81
1.5	79	77	74	73	76	74	73	70	87
2.0	82	80	78	77	79	77	77	74	92
2.5	84	82	81	80	81	80	79	77	95
3.0	85	84	83	82	82	81	80	78	97
4.0	86	85	84	84	83	83	82	80	98
5.0	86	86	85	85	84	84	82	80	99

Luminance curve limit

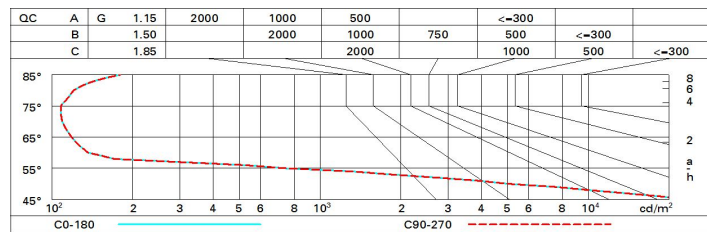

UGR diagram

Corrected UGR values (at 3500 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	20.5	21.1	20.8	21.4	21.0	20.5	21.1	20.8	21.4	21.0
	3H	20.4	20.9	20.7	21.2	21.5	20.4	20.9	20.7	21.2	21.5
	4H	20.3	20.8	20.7	21.1	21.4	20.3	20.8	20.7	21.1	21.4
	6H	20.3	20.7	20.6	21.0	21.3	20.3	20.7	20.6	21.0	21.3
	8H	20.2	20.7	20.6	21.0	21.3	20.2	20.7	20.6	21.0	21.3
	12H	20.2	20.6	20.6	20.9	21.3	20.2	20.6	20.6	20.9	21.3
4H	2H	20.3	20.8	20.7	21.1	21.4	20.3	20.8	20.7	21.1	21.4
	3H	20.2	20.6	20.6	20.9	21.3	20.2	20.6	20.6	20.9	21.3
	4H	20.1	20.5	20.5	20.8	21.2	20.1	20.5	20.5	20.8	21.2
	6H	20.0	20.3	20.4	20.7	21.1	20.0	20.3	20.4	20.7	21.1
	8H	20.0	20.3	20.4	20.7	21.1	20.0	20.3	20.4	20.7	21.1
	12H	19.9	20.2	20.4	20.6	21.1	19.9	20.2	20.4	20.6	21.1
8H	4H	20.0	20.3	20.4	20.7	21.1	20.0	20.3	20.4	20.7	21.1
	6H	19.9	20.1	20.3	20.5	21.0	19.9	20.1	20.3	20.5	21.0
	8H	19.8	20.0	20.3	20.5	21.0	19.8	20.0	20.3	20.5	21.0
	12H	19.8	19.9	20.3	20.4	20.9	19.8	19.9	20.3	20.4	20.9
12H	4H	19.9	20.2	20.4	20.6	21.1	19.9	20.2	20.4	20.6	21.1
	6H	19.8	20.0	20.3	20.5	21.0	19.8	20.0	20.3	20.5	21.0
	8H	19.8	19.9	20.3	20.4	20.9	19.8	19.9	20.3	20.4	20.9
Variations with the observer position at spacing:											
S =		1.0H					4.7 / -26.2				
		1.5H					7.5 / -31.2				
		2.0H					9.5 / -31.4				