


Last information update: February 2025

Product configuration: QX81.04

QX81.04: Minimal 15 cells - Flood - LED - Black



Product code

QX81.04: Minimal 15 cells - Flood - LED - Black

Technical description

Linear miniaturised recessed luminaire with 15 optical elements for LED lamps - fixed optic. Die-cast aluminium body, minimal version (frameless) installed flush with ceiling. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. Metallised thermoplastic high definition OptiBeam reflector, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare. Supplied with a dimmable DALI power supply unit connected to the luminaire.

Installation

The recess body is inserted in the specific adapter installed previously by means of a steel wire spring - check the thickness of the false ceiling and use a compatible frame available with a separate item code.

Colour

Black (04)

Weight (Kg)

0.86


Mounting

wall recessed|ceiling recessed

Wiring

Quick-coupling connections on the ballast unit.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2552	CRI (typical):	92
W system:	33.6	Colour temperature [K]:	2700
Im source:	3150	MacAdam Step:	3
W source:	30	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	75.9	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	32°	Control:	DALI-2
CRI (minimum):	90		

Polar

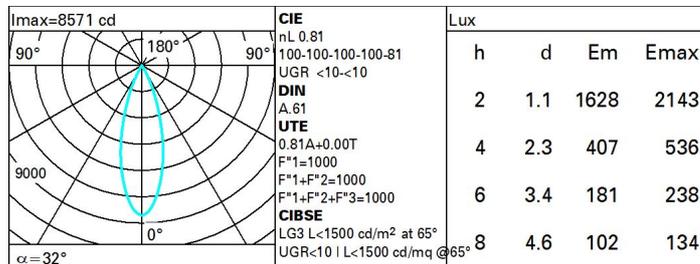

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	70	67	65	69	66	66	64	78
1.0	76	73	71	69	72	70	70	67	83
1.5	80	78	76	74	77	75	74	72	89
2.0	83	81	79	78	80	78	78	75	93
2.5	84	83	82	81	82	81	80	78	96
3.0	85	84	83	83	83	82	81	79	98
4.0	86	85	85	84	84	84	82	81	99
5.0	87	86	86	86	85	84	83	81	100

UGR diagram

Corrected UGR values (at 3150 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	-8.0	-7.5	-7.7	-7.3	-7.0	-8.0	-7.5	-7.7	-7.3	-7.0
	3H	-8.1	-7.7	-7.8	-7.4	-7.1	-8.1	-7.7	-7.8	-7.4	-7.1
	4H	-8.2	-7.8	-7.9	-7.5	-7.2	-8.2	-7.8	-7.9	-7.5	-7.2
	6H	-8.3	-7.9	-7.9	-7.6	-7.2	-8.3	-7.9	-7.9	-7.6	-7.3
	8H	-8.3	-7.9	-8.0	-7.6	-7.3	-8.3	-7.9	-8.0	-7.6	-7.3
	12H	-8.3	-8.0	-8.0	-7.6	-7.3	-8.4	-8.0	-8.0	-7.7	-7.3
4H	2H	-8.2	-7.8	-7.9	-7.5	-7.2	-8.2	-7.8	-7.9	-7.5	-7.2
	3H	-8.4	-8.0	-8.0	-7.7	-7.3	-8.4	-8.0	-8.0	-7.7	-7.3
	4H	-8.5	-8.1	-8.1	-7.8	-7.4	-8.5	-8.1	-8.1	-7.8	-7.4
	6H	-8.5	-8.2	-8.1	-7.8	-7.4	-8.5	-8.3	-8.1	-7.9	-7.4
	8H	-8.6	-8.3	-8.1	-7.9	-7.5	-8.6	-8.3	-8.1	-7.9	-7.5
	12H	-8.6	-8.4	-8.1	-7.9	-7.5	-8.6	-8.4	-8.2	-8.0	-7.5
8H	4H	-8.6	-8.3	-8.1	-7.9	-7.5	-8.6	-8.3	-8.1	-7.9	-7.5
	6H	-8.7	-8.4	-8.2	-8.0	-7.5	-8.7	-8.4	-8.2	-8.0	-7.5
	8H	-8.7	-8.5	-8.2	-8.0	-7.5	-8.7	-8.5	-8.2	-8.0	-7.5
	12H	-8.7	-8.6	-8.2	-8.1	-7.6	-8.7	-8.6	-8.2	-8.1	-7.6
12H	4H	-8.6	-8.4	-8.2	-8.0	-7.5	-8.6	-8.4	-8.1	-7.9	-7.5
	6H	-8.7	-8.5	-8.2	-8.1	-7.6	-8.7	-8.5	-8.2	-8.0	-7.5
	8H	-8.7	-8.6	-8.2	-8.1	-7.6	-8.7	-8.6	-8.2	-8.1	-7.6
Variations with the observer position at spacing:											
S =	1.0H	6.7 / -11.6				6.7 / -11.6					
	1.5H	9.6 / -12.2				9.6 / -12.2					
	2.0H	11.5 / -12.6				11.5 / -12.6					