

## Blade R downlight



Design iGuzzini

iGuzzini

Last information update: November 2024

### Product configuration: R217

R217: Frame Ø 80 - Wide Flood beam - LED

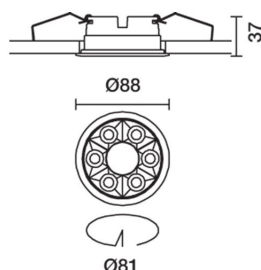

### Product code

R217: Frame Ø 80 - Wide Flood beam - LED

### Technical description

Ring luminaire with 6 optical elements for LED lamps - fixed optics. The optic system guarantees a high level of visual comfort and no glare. The body includes a radiant surface made of die-cast aluminium. Version includes a perimeter surface frame. High definition reflectors made of thermoplastic material vacuum-metallised with aluminium vapours, integrated in a set-back position in the anti-glare screen. Supplied with a power supply unit connected to the luminaire.

### Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - Ø 80 installation hole.

### Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)\* | White / burnished chrome (E7)\*

### Weight (Kg)

0.18

\* Colours on request


### Mounting

ceiling recessed

### Wiring

On the power supply unit with terminal board included. Available in on/off electronic versions.

Complies with EN60598-1 and pertinent regulations



### Technical data

lm system:	882	CRI (minimum):	90
W system:	12	Colour temperature [K]:	2700
lm source:	1050	MacAdam Step:	2
W source:	12	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	73.5	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	84	Number of optical assemblies:	1
Beam angle [°]:	58°		


### Polar

Imax=1140 cd		C15-195		CIE		Lux	
90°		180°		nL 0.84		h d1 d2 Em Emax	
				100-100-100-100-84		1 1.1 1.1 897 1130	
				UGR 12.8-12.9		2 2.2 2.2 224 282	
				DIN		3 3.3 3.3 100 126	
				A.61		4 4.4 4.4 56 71	
				UTE			
				0.84A+0.00T			
				F*1=996			
				F*1+F*2=1000			
				F*1+F*2+F*3=1000			
				CIBSE			
				LG3 L<1500 cd/m² at 65°			
				UGR<16   L<1500 cd/mq @65°			
α=58°							

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	76	72	69	67	71	69	68	66	78
1.0	79	76	73	71	75	73	72	69	83
1.5	83	80	78	77	79	78	77	74	89
2.0	86	84	82	81	83	81	80	78	93
2.5	87	86	85	84	85	83	83	80	96
3.0	88	87	86	86	86	85	84	82	98
4.0	89	88	88	87	87	87	85	83	99
5.0	90	89	89	89	88	88	86	84	100

# Luminance curve limit

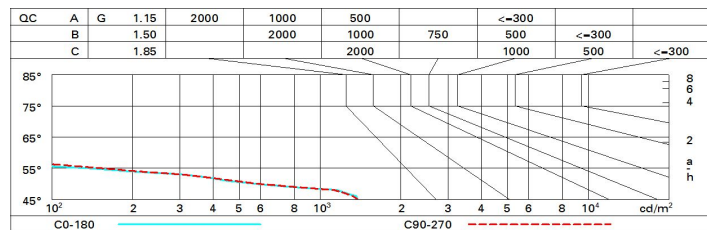

# UGR diagram

Corrected UGR values (at 1050 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	13.3	13.9	13.6	14.2	14.4	13.4	14.0	13.7	14.3	14.5
	3H	13.2	13.7	13.5	14.0	14.3	13.3	13.8	13.6	14.1	14.4
	4H	13.1	13.6	13.5	13.9	14.2	13.2	13.7	13.6	14.0	14.3
	6H	13.1	13.5	13.4	13.8	14.2	13.1	13.6	13.5	13.9	14.2
	8H	13.0	13.5	13.4	13.8	14.1	13.1	13.6	13.5	13.9	14.2
	12H	13.0	13.4	13.4	13.7	14.1	13.1	13.5	13.4	13.8	14.2
4H	2H	13.1	13.6	13.5	13.9	14.2	13.2	13.7	13.6	14.0	14.3
	3H	13.0	13.4	13.4	13.7	14.1	13.1	13.5	13.4	13.8	14.2
	4H	12.9	13.3	13.3	13.6	14.0	13.0	13.4	13.4	13.7	14.1
	6H	12.8	13.1	13.2	13.5	13.9	12.9	13.2	13.3	13.6	14.0
	8H	12.8	13.1	13.2	13.5	13.9	12.9	13.1	13.3	13.6	14.0
	12H	12.7	13.0	13.2	13.4	13.9	12.8	13.1	13.3	13.5	14.0
8H	4H	12.8	13.1	13.2	13.5	13.9	12.9	13.1	13.3	13.6	14.0
	6H	12.7	12.9	13.1	13.4	13.8	12.8	13.0	13.2	13.4	13.9
	8H	12.6	12.8	13.1	13.3	13.8	12.7	12.9	13.2	13.4	13.9
	12H	12.6	12.7	13.1	13.2	13.7	12.7	12.8	13.2	13.3	13.8
12H	4H	12.7	13.0	13.2	13.4	13.9	12.8	13.1	13.3	13.5	14.0
	6H	12.6	12.8	13.1	13.3	13.8	12.7	12.9	13.2	13.4	13.9
	8H	12.6	12.7	13.1	13.2	13.7	12.7	12.8	13.2	13.3	13.8
Variations with the observer position at spacing:											
S =	1.0H	6.7 / -28.1					6.7 / -27.6				
	1.5H	9.5 / -30.7					9.5 / -30.1				
	2.0H	11.5 / -30.9					11.5 / -30.3				