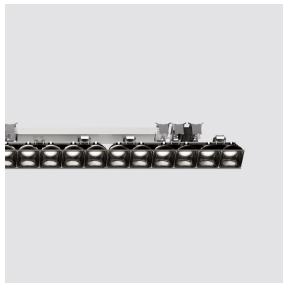


Last information update: November 2024

**Product configuration: R529.83+QX47.01**

R529.83: iN60 Space - LED module - L 1192 - DOWN emission - General Light - warm - dimmable DALI - Transparent/Black

QX47.01: iN60 MMO - Down Module - Frame - L= 1192 - White


**Product code**

R529.83: iN60 Space - LED module - L 1192 - DOWN emission - General Light - warm - dimmable DALI - Transparent/Black

**Technical description**

LED module designed to be housed in iN60 system profiles - downlight distribution - made up of an emission raster, lamp device and operating components. Version for high efficiency general light emission. Translucent textured thermoplastic raster, created with a catadioptric system (patented Opti Beam Diamond optic) - with no galvanic treatments - combined with a PP cover with a gloss finish and an additional diffuser screen. The resulting optic system generates an extremely elegant and professional light emission. Integrated DALI dimmable driver.

**Installation**

Module insertion on compartments with a mechanical easy-push system (steel snap-on springs).

**Colour**

Black Transparent (83)

**Weight (Kg)**

0.93

**Wiring**

Quick coupling input terminal block connection. LED module complete with integrated DALI control gear. The electrical cables used are made of a "halogen free" material.

Complies with EN60598-1 and pertinent regulations


**Product code**

QX47.01: iN60 MMO - Down Module - Frame - L= 1192 - White

**Technical description**

The L profile=1192 mm is made of extruded aluminium. This is the Frame version for down emission. The product can be used for recessed applications and for both stand alone and continuous line versions.

**Installation**

It can be recessed using suitable accessories to be ordered separately. The modules are completed with end caps and rasters with LEDs to be ordered separately.

**Colour**

White (01)


**Weight (Kg)**

2.17

**Mounting**


ceiling recessed

Complies with EN60598-1 and pertinent regulations


**Technical data**

Im system:	2946	Colour temperature [K]:	3000
W system:	27.7	MacAdam Step:	3
Im source:	4150	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	24	Lamp code:	LED
Luminous efficiency (Im/W, real value):	106.3	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	71	Control:	DALI-2
CRI (minimum):	90		


# Polar

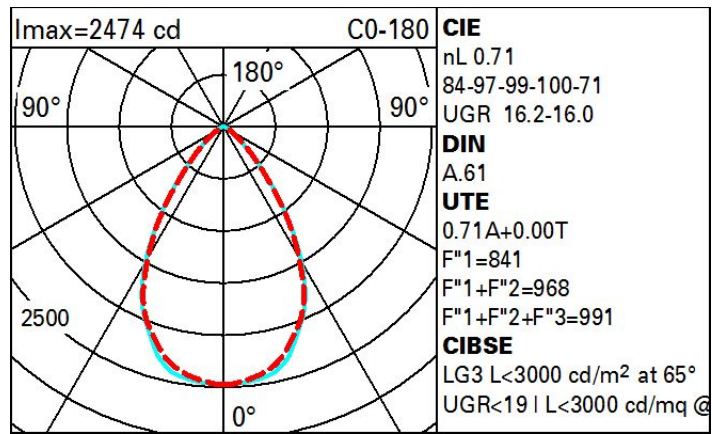

## Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	59	54	51	49	54	51	50	47	67
1.0	62	58	55	53	57	55	54	51	72
1.5	67	64	61	59	63	61	60	57	81
2.0	70	68	66	64	66	65	64	61	86
2.5	72	70	68	67	69	67	66	64	90
3.0	73	71	70	69	70	69	68	66	92
4.0	74	73	72	71	71	71	69	67	95
5.0	74	74	73	72	72	71	70	68	96

## Luminance curve limit

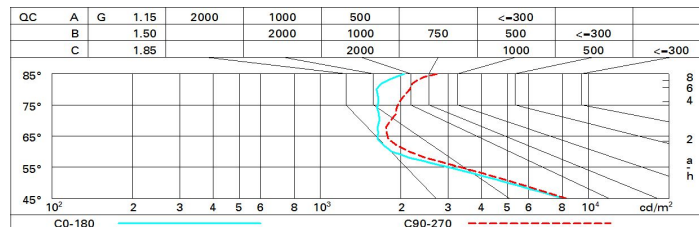

# UGR diagram

Corrected UGR values (at 4150 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	15.8	16.6	16.1	16.8	17.0	15.7	16.5	16.0	16.7	17.0	
	3H	15.9	16.6	16.2	16.8	17.1	15.7	16.3	16.0	16.6	16.9	
	4H	15.9	16.6	16.3	16.9	17.2	15.6	16.2	16.0	16.5	16.8	
	6H	16.0	16.6	16.4	16.9	17.2	15.6	16.1	15.9	16.4	16.8	
	8H	16.1	16.6	16.4	16.9	17.3	15.5	16.1	15.9	16.4	16.8	
	12H	16.1	16.6	16.5	17.0	17.3	15.5	16.0	15.9	16.4	16.7	
4H	2H	15.7	16.3	16.0	16.6	16.9	16.0	16.6	16.3	16.9	17.2	
	3H	15.8	16.4	16.2	16.7	17.1	16.0	16.6	16.4	16.9	17.3	
	4H	16.0	16.4	16.4	16.8	17.2	16.0	16.5	16.4	16.9	17.3	
	6H	16.1	16.5	16.5	16.9	17.3	16.0	16.4	16.5	16.8	17.3	
	8H	16.2	16.6	16.6	17.0	17.4	16.0	16.4	16.5	16.8	17.3	
	12H	16.3	16.6	16.7	17.0	17.5	16.0	16.3	16.4	16.8	17.2	
8H	4H	15.9	16.3	16.4	16.7	17.2	16.5	16.9	16.9	17.3	17.7	
	6H	16.2	16.5	16.6	16.9	17.4	16.6	16.9	17.1	17.4	17.8	
	8H	16.3	16.6	16.8	17.0	17.5	16.7	16.9	17.2	17.4	17.9	
	12H	16.5	16.7	17.0	17.2	17.7	16.7	16.9	17.2	17.4	17.9	
12H	4H	15.9	16.3	16.4	16.7	17.2	16.6	17.0	17.1	17.4	17.9	
	6H	16.2	16.4	16.7	16.9	17.4	16.8	17.1	17.3	17.6	18.1	
	8H	16.3	16.6	16.8	17.1	17.6	16.9	17.2	17.4	17.7	18.2	
Variations with the observer position at spacing:												
S =		1.0H	1.9 / -2.4		1.6 / -1.8							
		1.5H	3.9 / -3.3		3.4 / -2.5							
		2.0H	5.7 / -3.5		5.1 / -2.7							