

Last information update: April 2025

**Product configuration: R701.E7**

R701.E7: Adjustable round recessed luminaire - Minimal - medium - Super Comfort - White / burnished chrome

**Product code**

R701.E7: Adjustable round recessed luminaire - Minimal - medium - Super Comfort - White / burnished chrome

**Technical description**

Minimal round recessed luminaire (frameless). Adjustable version that rotates internally by 355° and tilts by a maximum of 30°. The swivel unit rotates in a set back position in relation to the surface of the ceiling in order to guarantee precise, comfortable light diffusion and reduce direct glare significantly. The swivel unit body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. Metallised, thermoplastic, high definition reflector - medium optic. Die-cast aluminium structure for flush with ceiling installation - a specific adapter with a separate code is available for false ceilings. This is indispensable for installing recessed luminaires. Steel rotating parts. The rings inside the recessed body and the swivel unit are made of thermoplastic available in a range of painted and metallised finishes. Safety glass included LED lamp with high color rendering index. Power unit available with a separate code no.

**Installation**

The luminaire is recessed in the adapter (QC68) by means of an anti-fall steel wire spring, previously installed on the ceiling that can be between 12.5 and 25 mm thick. A special steel spring required to extract the main body of the adapter after it has been installed is included in the package.

**Colour**

White (01) | Black (04) | Chrome (10)\* | Gold (14)\* | Burnished chrome (E6)\* | Gold satin-finish (E8)\*

**Weight (Kg)**

0.11

\* Colours on request

**Mounting**

ceiling recessed

**Wiring**

Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

**Notes**

A wide range of decorative accessories and diffusers is available (due to the shape of the recess only the accessories for the Ø59 recess can be used).

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	697	CRI (minimum):	90
W system:	6.8	Colour temperature [K]:	4000
Im source:	860	MacAdam Step:	2
W source:	6.8	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	102.4	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	24°	LED current [mA]:	200


**Polar**

<p>Imax=3663 cd α = 23° / 24°</p>	<b>CIE</b> nL 0.81 100-100-100-100-81 UGR <10-10 <b>DIN</b> A.61 <b>UTE</b> 0.81A+0.00T F*1=999 F*1+F*2=1000 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<1500 cd/m² at 65° UGR<10   L<1500 cd/mq @65°				<b>Lux</b>			
	h	d	Em	Emax	h	d	Em	Emax
	2	0.8	739	916				
	4	1.6	185	229				
	6	2.4	82	102				
	8	3.2	46	57				

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	69	67	65	69	66	66	64	78
1.0	76	73	71	69	72	70	70	67	83
1.5	80	78	76	74	77	75	74	72	89
2.0	83	81	79	78	80	78	78	75	93
2.5	84	83	82	81	82	81	80	78	96
3.0	85	84	83	83	83	82	81	79	98
4.0	86	85	85	84	84	84	82	81	99
5.0	87	86	86	86	85	84	83	81	100

# Luminance curve limit

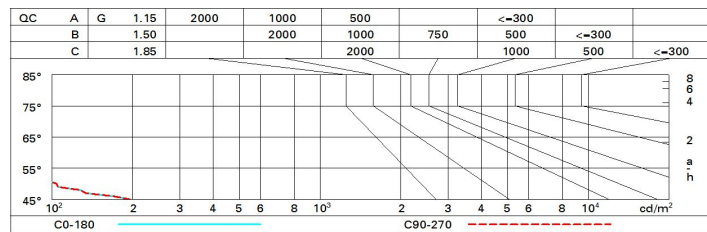

# UGR diagram

Corrected UGR values (at 800 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	-6.8	-4.6	-6.4	-4.3	-4.0	-6.8	-4.6	-6.4	-4.3	-4.0
	3H	-6.9	-5.3	-6.5	-5.0	-4.6	-6.9	-5.3	-6.5	-5.0	-4.6
	4H	-7.0	-5.7	-6.6	-5.3	-5.0	-7.0	-5.7	-6.6	-5.3	-5.0
	6H	-7.0	-6.0	-6.6	-5.7	-5.4	-7.0	-6.0	-6.6	-5.7	-5.4
	8H	-7.1	-6.1	-6.7	-5.7	-5.4	-7.1	-6.1	-6.7	-5.7	-5.4
	12H	-7.1	-6.1	-6.7	-5.8	-5.4	-7.1	-6.1	-6.7	-5.8	-5.4
4H	2H	-7.0	-5.7	-6.6	-5.3	-5.0	-7.0	-5.7	-6.6	-5.3	-5.0
	3H	-7.1	-6.1	-6.7	-5.8	-5.4	-7.1	-6.1	-6.7	-5.8	-5.4
	4H	-7.3	-6.2	-6.8	-5.8	-5.4	-7.3	-6.2	-6.8	-5.8	-5.4
	6H	-7.6	-5.9	-7.1	-5.4	-5.0	-7.6	-5.9	-7.1	-5.4	-5.0
	8H	-7.8	-5.8	-7.3	-5.3	-4.8	-7.8	-5.8	-7.3	-5.3	-4.8
	12H	-7.9	-5.9	-7.4	-5.4	-4.9	-7.9	-5.9	-7.4	-5.4	-4.9
8H	4H	-7.8	-5.8	-7.3	-5.3	-4.8	-7.8	-5.8	-7.3	-5.3	-4.8
	6H	-7.9	-6.1	-7.4	-5.6	-5.0	-7.9	-6.1	-7.4	-5.6	-5.0
	8H	-7.9	-6.3	-7.4	-5.8	-5.3	-7.9	-6.3	-7.4	-5.8	-5.3
	12H	-7.7	-6.7	-7.2	-6.2	-5.7	-7.7	-6.7	-7.2	-6.2	-5.7
12H	4H	-7.9	-5.9	-7.4	-5.4	-4.9	-7.9	-5.9	-7.4	-5.4	-4.9
	6H	-7.9	-6.3	-7.4	-5.8	-5.3	-7.9	-6.3	-7.4	-5.8	-5.3
	8H	-7.7	-6.7	-7.2	-6.2	-5.7	-7.7	-6.7	-7.2	-6.2	-5.7
Variations with the observer position at spacing:											
S =	1.0H	6.7 / -15.1					6.7 / -15.1				
	1.5H	9.5 / -27.2					9.5 / -27.2				
	2.0H	11.5 / -27.8					11.5 / -27.8				