


Design iGuzzini iGuzzini



R948.G1: L=2383 mm - DALI - UP/DOWN emission - Black / dark space

R948.G1: L=2383 mm - DALI - UP/DOWN emission - Black / dark space

Luminaire L = 2383 mm complete with LED lamp in warm white colour tone 3000K. Body made of extruded painted aluminium and a thermoplastic raster with a white finish or a patented "Opti Diamond" technology, translucent textured thermoplastic raster created with a catadioptric system and no galvanic treatments. Product with high efficiency up/down emission LED, 50% up - 50% down, UGR<19 L<3000 cd/mq  $\alpha > 65^\circ$  emission, for use in environments with video monitors in compliance with EN 12464-1. The DALI driver is housed in the upper part of the luminaire. Possibility of pendant installation using kit to be ordered separately as an accessory. The luminaire can be installed individually or in a continuous line, creating an uninterrupted light line.

Pendant installation using a kit to be ordered separately.

Weight (Kg)  
7.5

## ceiling surface

Product complete with DALI components. Possibility of integrating ILS components available as accessories. The electrical cables used are made of a "halogen free" material.

The accessory kit for pendant installations includes a pair of end caps for individual installations.

Complies with EN60598-1 and pertinent regulations




Im system:	9587	Voltage [Vin]:	230
W system:	69	Lamp code:	LED
Im source:	12450	Number of lamps for optical assembly:	1
W source:	63	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	138.9	Number of optical assemblies:	1
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	4871	Inrush current:	10 A / - µs
Light Output Ratio (L.O.R.) [%]:	77	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 12 luminaires B16A: 20 luminaires C10A: 20 luminaires C16A: 34 luminaires
CRI (minimum):	80	Minimum dimming %:	1
Colour temperature [K]:	3000	Overvoltage protection:	2kV Common mode & 1kV Differential mode
MacAdam Step:	3	Control:	DALI-2
Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)		

<p><b>Imax=3049 cd</b></p> <p><b>C0-180</b></p>	<p><b>CIE</b></p> <p>nL 0.77</p> <p>69-92-99-49-77</p> <p>UGR 12.9-12.8</p> <p><b>DIN</b></p> <p>C.53</p> <p><b>UTE</b></p> <p>0.38C+0.39T</p> <p>F"1=687</p> <p>F"1+F"2=916</p> <p>F"1+F"2+F"3=989</p> <p><b>CIBSE</b></p> <p>LG3 L&lt;3000 cd/m<sup>2</sup> at 65°</p> <p>UGR&lt;16   L&lt;3000 cd/mq @</p>
---	---

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	46	39	35	32	35	31	28	21	55
1.0	50	44	40	37	39	35	31	23	62
1.5	56	51	48	45	45	42	37	28	73
2.0	60	56	53	50	49	46	40	30	80
2.5	62	59	56	54	51	49	42	32	84
3.0	63	61	58	56	53	51	44	33	87
4.0	65	63	61	59	54	53	46	34	91
5.0	66	64	63	61	56	55	47	35	93

# Luminance curve limit

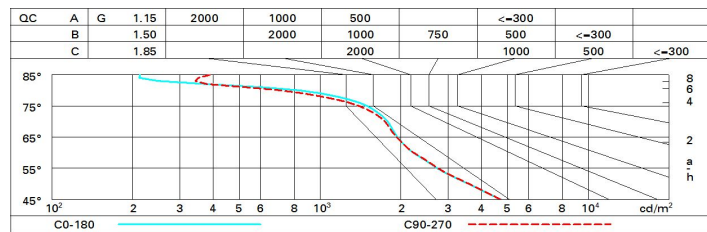

# UGR diagram

Corrected UGR values (at 12450 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	11.6	12.2	12.5	13.1	14.2	11.6	12.2	12.5	13.0	14.2
	3H	12.2	12.7	13.1	13.6	14.8	11.7	12.2	12.6	13.1	14.3
	4H	12.4	12.8	13.3	13.8	15.0	11.7	12.2	12.7	13.1	14.3
	6H	12.4	12.9	13.4	13.8	15.0	11.7	12.1	12.6	13.0	14.3
	8H	12.4	12.8	13.4	13.7	15.0	11.6	12.0	12.6	13.0	14.2
	12H	12.3	12.7	13.3	13.7	14.9	11.6	11.9	12.5	12.9	14.2
4H	2H	11.7	12.2	12.7	13.1	14.3	12.3	12.8	13.3	13.7	14.9
	3H	12.5	12.9	13.5	13.8	15.1	12.6	13.0	13.6	14.0	15.2
	4H	12.8	13.1	13.8	14.1	15.4	12.7	13.1	13.7	14.0	15.3
	6H	12.9	13.2	13.9	14.2	15.5	12.8	13.1	13.8	14.1	15.4
	8H	12.9	13.1	13.9	14.1	15.4	12.8	13.0	13.8	14.0	15.4
	12H	12.8	13.0	13.8	14.0	15.4	12.7	13.0	13.7	14.0	15.3
8H	4H	12.9	13.1	13.9	14.1	15.4	12.7	13.0	13.7	14.0	15.3
	6H	13.0	13.2	14.1	14.3	15.6	12.8	13.1	13.9	14.1	15.4
	8H	13.0	13.2	14.0	14.2	15.5	12.8	13.0	13.9	14.1	15.4
	12H	12.9	13.1	14.0	14.1	15.5	12.8	13.0	13.9	14.0	15.4
12H	4H	12.8	13.0	13.8	14.1	15.4	12.7	12.9	13.7	13.9	15.2
	6H	13.0	13.2	14.0	14.2	15.5	12.8	13.0	13.8	14.0	15.3
	8H	12.9	13.1	14.0	14.1	15.5	12.8	13.0	13.8	14.0	15.4
Variations with the observer position at spacing:											
S =	1.0H	0.5 / -0.7					0.5 / -0.7				
	1.5H	1.2 / -1.5					1.2 / -1.5				
	2.0H	2.3 / -1.8					2.4 / -1.9				