

Laser Blade XS


Design iGuzzini

iGuzzini

Last information update: February 2025

Product configuration: RB01

RB01: Minimal 10 cells - Wide Flood beam - LED

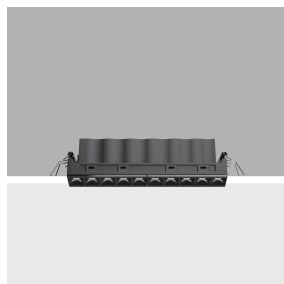

Product code

RB01: Minimal 10 cells - Wide Flood beam - LED

Technical description

Linear miniaturised recessed luminaire with 10 optical elements for LED lamps - fixed optic. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of controlled glare visual comfort. Main body with die-cast aluminium radiant surface, minimal (frameless) version for mounting flush with the ceiling. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. Metallised, thermoplastic, high definition Opti Beam reflector, integrated in a set-back position in the anti-glare screen. Supplied with a dimmable DALI power supply unit connected to the luminaire.

Installation

The luminaire is recessed in the specific adapter (QJ92) by means of a steel wire spring, previously installed on the ceiling that can be 12.5 / 15 / 20 mm thick. A special protective sheath allows finishing operations on the plasterboard to be simplified and speeded up.

Colour

White (01) | Black (04) | Gold (14)* | Burnished chrome (E6)*

Weight (Kg)

0.46

* Colours on request

Mounting

wall recessed|ceiling recessed

Wiring

On the power supply unit with terminal board included.

Notes

The special steel wire spring provided is required to facilitate the eventual extraction of the recessed body once it has been inserted.

Complies with EN60598-1 and pertinent regulations



Technical data

| | | | |
|--|------|---------------------------------------|---------------------------------|
| lm system: | 1577 | Colour temperature [K]: | 3500 |
| W system: | 23.1 | MacAdam Step: | 2 |
| lm source: | 1900 | Life Time LED 1: | > 50,000h - L80 - B10 (Ta 25°C) |
| W source: | 20 | Voltage [Vin]: | 230 |
| Luminous efficiency (lm/W, real value): | 68.3 | Lamp code: | LED |
| lm in emergency mode: | - | Number of lamps for optical assembly: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | ZVEI Code: | LED |
| Light Output Ratio (L.O.R.) [%]: | 83 | Number of optical assemblies: | 1 |
| Beam angle [°]: | 58° | Control: | DALI-2 |
| CRI (minimum): | 90 | | |


Polar

| | | | | | |
|--|--|-----|-----|-----|------|
| <p>Imax=2010 cd</p> <p>90° 180° 90°</p> <p>2000</p> <p>0°</p> <p>α=58°</p> | <p>CIE nL 0.83 100-100-100-100-83 UGR 16.5-16.5 DIN A.61 UTE 0.83A+0.00T F*1=996 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<19 L<1500 cd/mq @65°</p> | Lux | | | |
| | | h | d | Em | Emax |
| | | 2 | 2.2 | 399 | 498 |
| | | 4 | 4.4 | 100 | 125 |
| | | 6 | 6.7 | 44 | 55 |
| | | 8 | 8.9 | 25 | 31 |

Utilisation factors

| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 75 | 71 | 68 | 66 | 70 | 68 | 68 | 65 | 78 |
| 1.0 | 78 | 75 | 72 | 70 | 74 | 72 | 71 | 69 | 83 |
| 1.5 | 82 | 79 | 77 | 76 | 78 | 77 | 76 | 73 | 89 |
| 2.0 | 85 | 83 | 81 | 80 | 82 | 80 | 79 | 77 | 93 |
| 2.5 | 86 | 85 | 84 | 83 | 84 | 83 | 82 | 79 | 96 |
| 3.0 | 87 | 86 | 85 | 85 | 85 | 84 | 83 | 81 | 98 |
| 4.0 | 88 | 87 | 87 | 86 | 86 | 86 | 84 | 82 | 99 |
| 5.0 | 89 | 88 | 88 | 88 | 87 | 86 | 85 | 83 | 100 |

Luminance curve limit

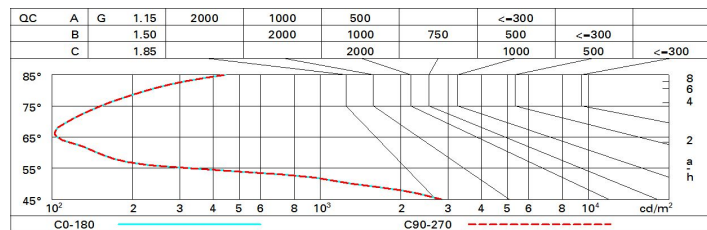

UGR diagram

| Corrected UGR values (at 1900 lm bare lamp luminous flux) | | | | | | | | | | | |
|--|-----|---------------------|------|------|------|------|-------------------|------|------|------|------|
| Reflect.: ceiling walls work pl. Room dim x y | | viewed crosswise | | | | | viewed endwise | | | | |
| 2H | 2H | 17.1 | 17.5 | 17.3 | 17.8 | 18.0 | 17.1 | 17.5 | 17.3 | 17.8 | 18.0 |
| | 3H | 16.9 | 17.4 | 17.3 | 17.6 | 17.9 | 16.9 | 17.4 | 17.3 | 17.6 | 17.9 |
| | 4H | 16.9 | 17.3 | 17.2 | 17.6 | 17.8 | 16.9 | 17.3 | 17.2 | 17.6 | 17.8 |
| | 6H | 16.8 | 17.2 | 17.1 | 17.5 | 17.8 | 16.8 | 17.2 | 17.1 | 17.5 | 17.8 |
| | 8H | 16.8 | 17.1 | 17.1 | 17.4 | 17.8 | 16.8 | 17.1 | 17.1 | 17.4 | 17.8 |
| | 12H | 16.7 | 17.1 | 17.1 | 17.4 | 17.7 | 16.7 | 17.1 | 17.1 | 17.4 | 17.7 |
| 4H | 2H | 16.9 | 17.3 | 17.2 | 17.6 | 17.8 | 16.9 | 17.3 | 17.2 | 17.6 | 17.8 |
| | 3H | 16.7 | 17.1 | 17.1 | 17.4 | 17.7 | 16.7 | 17.1 | 17.1 | 17.4 | 17.7 |
| | 4H | 16.6 | 16.9 | 17.0 | 17.3 | 17.7 | 16.6 | 16.9 | 17.0 | 17.3 | 17.7 |
| | 6H | 16.5 | 16.8 | 17.0 | 17.2 | 17.6 | 16.5 | 16.8 | 17.0 | 17.2 | 17.6 |
| | 8H | 16.5 | 16.7 | 16.9 | 17.1 | 17.6 | 16.5 | 16.7 | 16.9 | 17.1 | 17.6 |
| | 12H | 16.4 | 16.7 | 16.9 | 17.1 | 17.5 | 16.4 | 16.7 | 16.9 | 17.1 | 17.5 |
| 8H | 4H | 16.5 | 16.7 | 16.9 | 17.1 | 17.6 | 16.5 | 16.7 | 16.9 | 17.1 | 17.6 |
| | 6H | 16.4 | 16.6 | 16.9 | 17.0 | 17.5 | 16.4 | 16.6 | 16.9 | 17.0 | 17.5 |
| | 8H | 16.3 | 16.5 | 16.8 | 17.0 | 17.5 | 16.3 | 16.5 | 16.8 | 17.0 | 17.5 |
| | 12H | 16.3 | 16.4 | 16.8 | 16.9 | 17.4 | 16.3 | 16.4 | 16.8 | 16.9 | 17.4 |
| 12H | 4H | 16.4 | 16.7 | 16.9 | 17.1 | 17.5 | 16.4 | 16.7 | 16.9 | 17.1 | 17.5 |
| | 6H | 16.3 | 16.5 | 16.8 | 17.0 | 17.5 | 16.3 | 16.5 | 16.8 | 17.0 | 17.5 |
| | 8H | 16.3 | 16.4 | 16.8 | 16.9 | 17.4 | 16.3 | 16.4 | 16.8 | 16.9 | 17.4 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | | 1.0H | | | | | 0.5 / -24.9 | | | | |
| | | 1.5H | | | | | 9.4 / -25.6 | | | | |
| | | 2.0H | | | | | 11.4 / -25.8 | | | | |